




2013
september

Movex

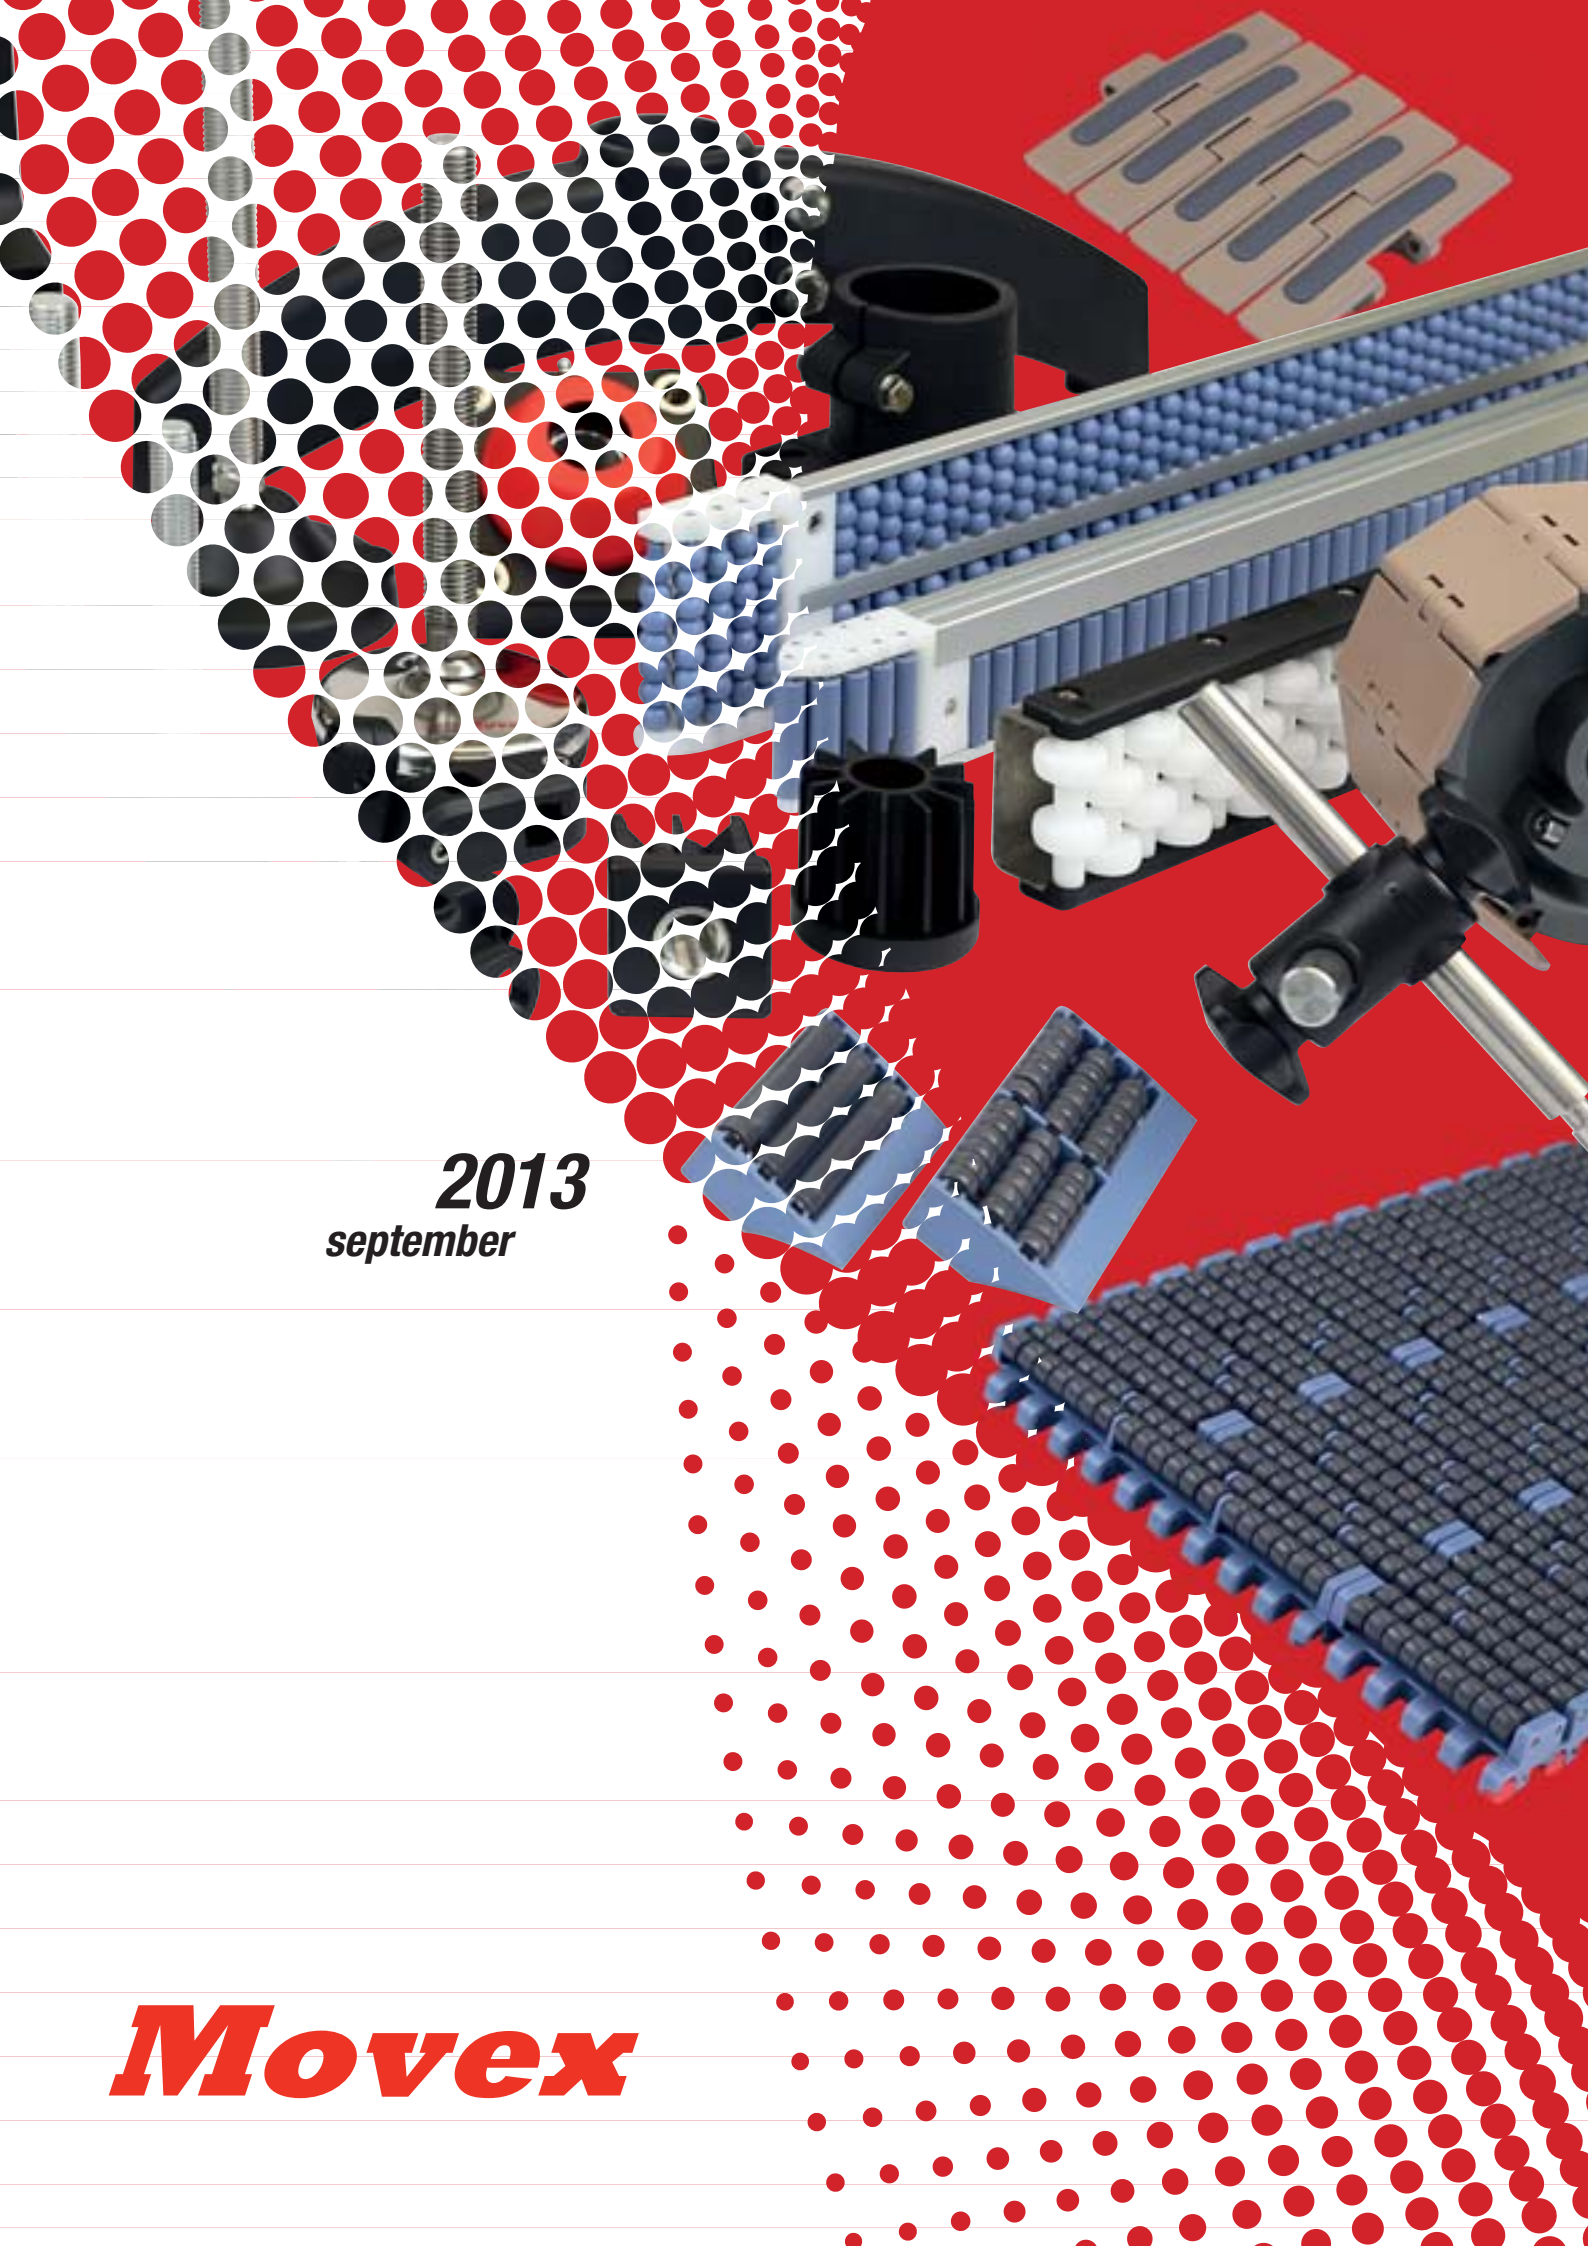


This catalogue presents and includes the latest generations of products shown in earlier publications and it relates to the current production. Other information, which may be different from that contained in this catalogue has to be considered invalid. Movex Industrial Innovation S.r.l. reserves the right to carry out modifications rendered necessary by the technical evolution of the products.

© Copyright Movex S.r.l. 2013

The contents of this catalogue are the copyright of Movex S.r.l. and may not be reproduced (even extracts) unless written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any error or omissions.

Printed in Italy. Catalogue No. M999505

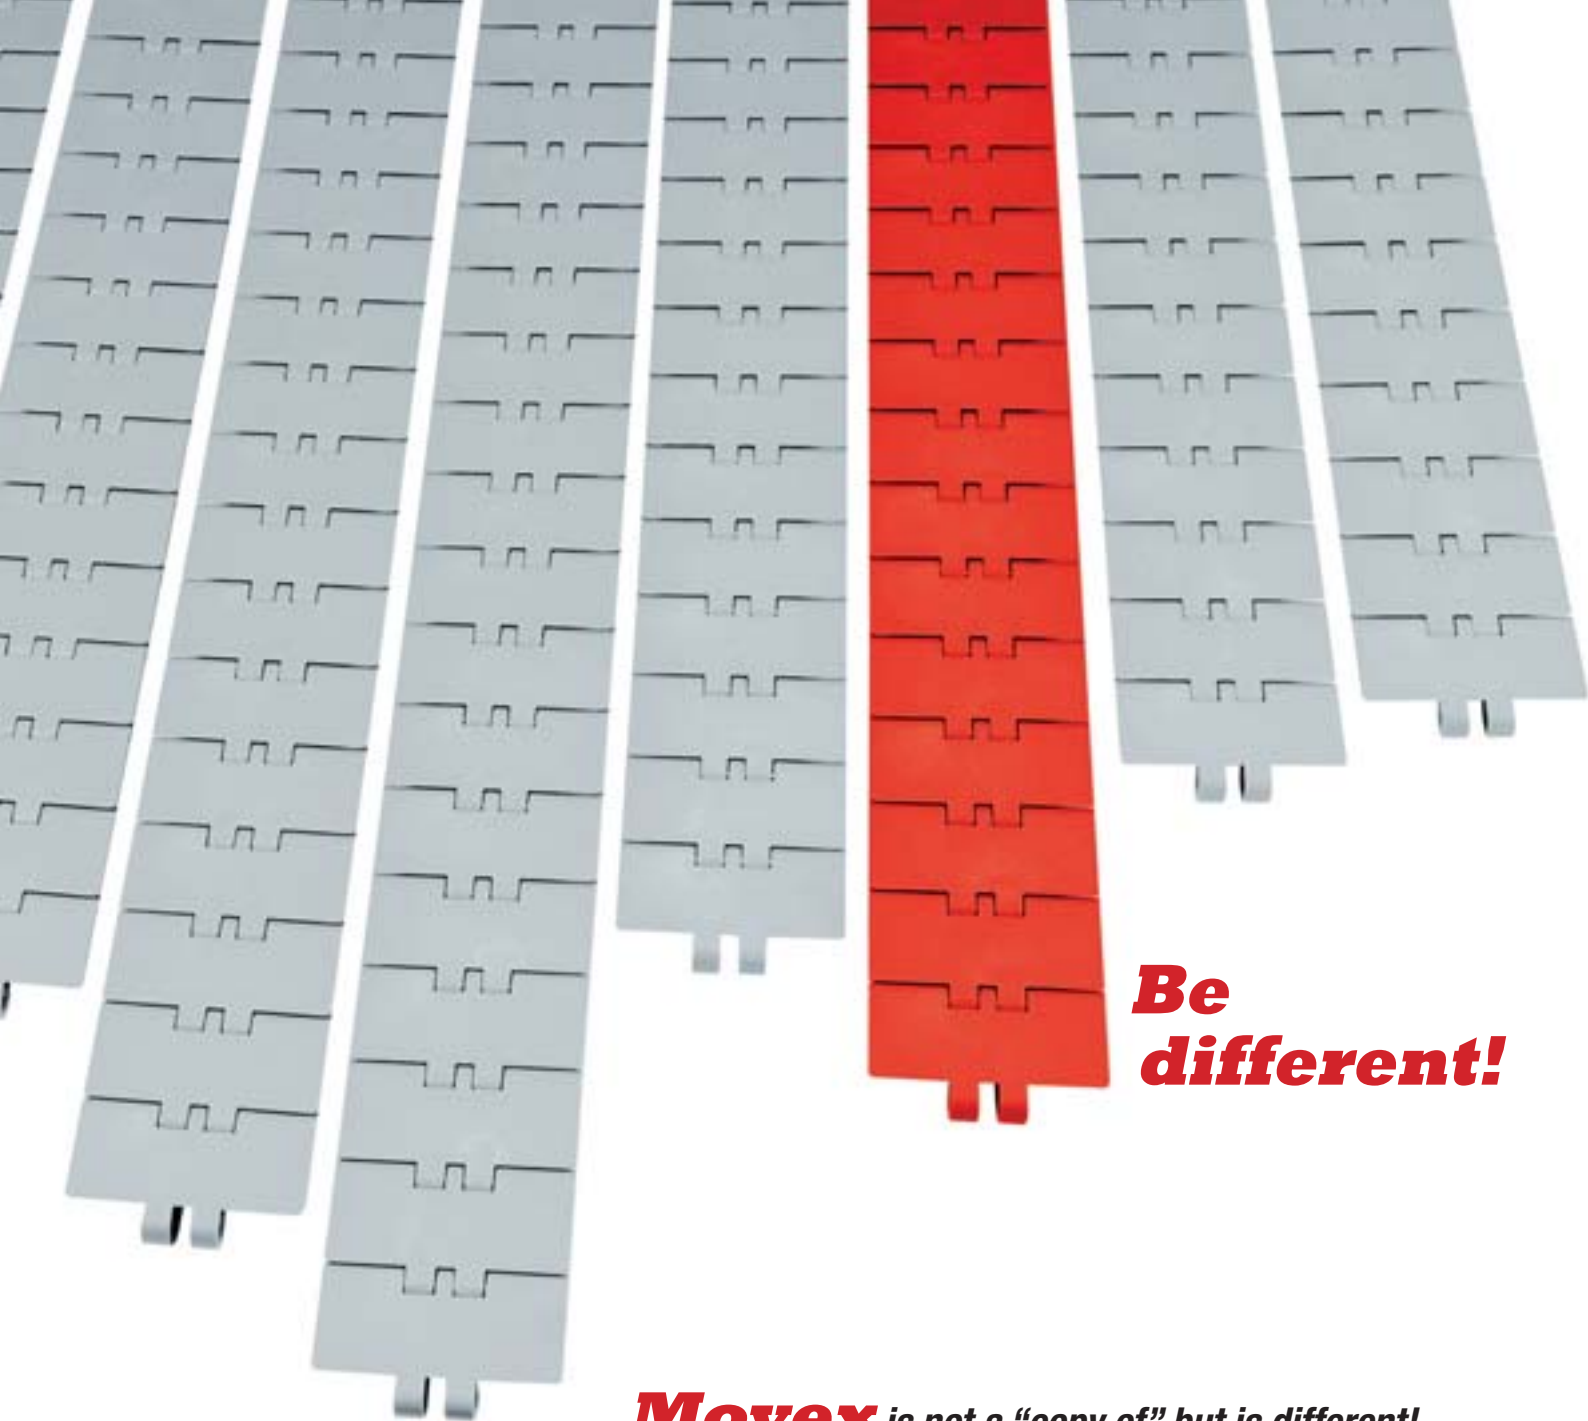

***Be
different!***

Movex is not a “copy of” but is different!


Movex is a family owned European company.

Movex has a European mentality.

Movex is “Quality & Service”.

Movex is better, in all aspects & disciplines!

Movex is ready to serve you!

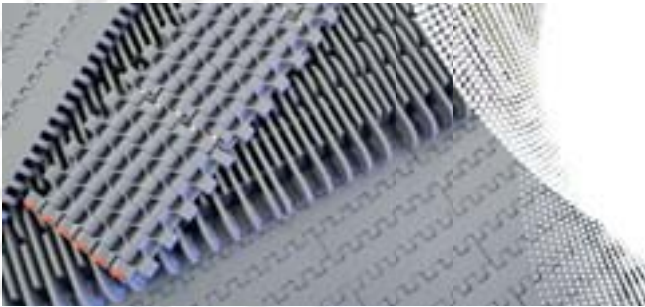

MOVEX INDUSTRIAL INNOVATIONS

A new setup... Not new to the industry

Movex raggruppa un team internazionale di tecnici del settore beverage e componentistica industriale. Movex percepisce le esigenze e l'evoluzione del mercato intende quindi proporsi con soluzioni innovative. Situata in Italia a Telgate, Movex investe con tecnologie avanzate per offrire al cliente una gamma completa di catene, tappeti modulari e componenti di alta qualità. Movex è un concentrato di competenza ed esperienza, propone design, flessibilità, qualità e servizio impeccabile. Unitevi a noi in questo nuovo progetto!

Movex è la soluzione che stavate aspettando... **Movex** il futuro passa da qui!

MOVEX INDUSTRIAL INNOVATIONS

A new setup... Not new to the industry

Movex, a new home to a team of experienced Industry experts. Recognizing today's changing and demanding market we have assembled all our experience gained over a long period to invent a whole new solution. Based in Telgate, Italy, Movex is investing in talent and the latest technology to bring you, the customer a range of conveyor chains, belts and components with unprecedented levels of quality and service.

*Combining our expertise and the experience gained within the industry we are committed to providing the very best in product design and application advice to ensure a confident solution to all our customers requirements. Join us now! It's the solution you have been waiting for... **Movex**, the future is here !*

MOVEX INDUSTRIAL INNOVATIONS

A new setup... Not new to the industry

Movex ist eine neue Realität für ein Team von Experten aus aller Welt die seit langer Zeit in dieser Industrie tätig sind. Wir haben die Bedürfnisse der Kunden erkannt und bündeln unsere Erfahrungen um neue Lösungen dem Markt anzubieten zu können.

Unser Hauptsitz ist in Telgate, Italien. Wir investieren in Personen und Technologie um Ihnen qualitativ hochwertige Komponenten für die Transporttechnik zu liefern. Basierend auf unseren Erkenntnissen und der jahrelangen Erfahrungen bieten wir unseren Kunden eine komplette Produktpalette mit innovativen Design und Applikationslösungen um alle Bedürfnisse der Industrie ab zu decken.

*Folgend Sie uns in eine neue Erfahrung... **Movex**, die Zukunft ist hier!*

I nostri prodotti

Catene e tappeti Un'ampia gamma di catene e tappeti di alta qualità per qualsiasi tipo di esigenza, anche la più complessa. Tappeti modulari dal robusto design, costruiti per soddisfare ogni tipo di applicazione e implementare l'efficienza dell'impianto.

Componenti Una gamma omnicomprensiva e versatile di componenti per soddisfare le necessità di ogni tipologia di impianto. I nostri innovativi design offrono ingegnosi accorgimenti e pratiche soluzioni che semplificano la costruzione dell'impianto.

Supporti con cuscinetti Ancora una vasta gamma di supporti con cuscinetti di alta qualità montati su alloggiamenti in plastica. Ideali per l'industria alimentare e dell'imballaggio e in genere per applicazioni in ambiente umido.

Curve Le nostre curve sono progettate con materiali selezionati per garantire il più basso coefficiente d'attrito e la più lunga durata (resistenza all'usura). Il design evoluto assicura uno scorrimento ottimale garantendo la più elevata efficienza.

Our Products

Chains and Belts A wide range of high quality chains and belts made for the most challenging applications. The robust design specially made to fulfill specific application needs and to improve the efficiency of your production line.

Conveyor components A comprehensive and versatile range of components to support all your conveyor-constructions needs. Innovative and carefully thought-out designs, contributes to simplify combinations and integrations of the conveyors.

Bearing supports Wide range of bearing support built with plastic housing and high quality bearings. Our bearings are ideal for food, beverage industry and applications in wet environment.

Corner Tracks Our corner tracks are designed with the materials selected to provide the lowest coefficient of friction and high wear life. The carefully thought out design ensures a smooth running conveyor with high efficiency.

Unsere Produkte

Scharnierbandketten und Modulare Mattenketten Eine komplette Palette qualitativ hochwertiger Ketten designed für anspruchsvolle Applikationen. Robustes Design der modularen Mattenketten um spezifische Anwendungen zu erfüllen und die Effizienz zu erhöhen.

Transporteur-Komponenten Eine umfassende und vielseitig verwendbare Selektion von Komponenten um Ihre Bedürfnisse zur Realisierung von Transporteuren zu unterstützen. Unser innovatives Design trägt zur einfacheren Gestaltung der Konstruktion bei.

Flanschlager Große Auswahl verschiedener Flanschlager mit Kunststoffgehäuse und exzellenten Lagereinsätzen. Diese Produktpalette eignet sich ideal für die Anwendungen in der Lebensmittel- und in der Getränkeindustrie.

Kurvenführungen Unsere Kurvenführungen werden aus Materialien gefertigt die geringe Reibwerte besitzen und eine hohe Verschleißfestigkeit ausweisen. Unser einfaches und durchdachtes Design trägt zu einem ruhigen und ruckelfreien Lauf der Kette bei.

MATERIALS

Steel Chain

SSE

Super hard stainless Steel (MAT. 1.4589).

SS

Standard Stainless steel material (MAT. 1.4016).

Max^{Speed}

Special stainless steel chain for Maximum-speed applications and more critical circumstances; Optimum surface-finish for superior sliding properties.

Plastic Chain & Belts

LF

Low friction Acetal Resin.

LFA

Low friction Acetal Resin.

MX

Extra Performance material with very low coefficient of friction. Improved wear resistance, good strength and limited pitch elongation. Indicated for high speed and dry running applications.

MK

Super Low Friction Acetal Resin. The self-lubricating additives ensure continuous low friction resulting in higher efficiency and optimum service life. This material is specially developed for those applications in glass, can and PET lines where external lubrication has to be avoided or limited.

PP

Polypropylene material for better chemical resistant and higher temperature.

PPX

Reinforced Polypropylene for improved heat stability and chemical resistance.

summary

	<i>Steel chains</i>	7
	<i>Plastic chains</i>	13
	<i>Chain sprockets</i>	27
	<i>Chain idler wheels</i>	45
	<i>Tab & Magnetic corner tracks</i>	49
	<i>Belts</i>	77
	<i>Belt sprockets</i>	93
	<i>Guides</i>	107
	<i>Return components</i>	121
	<i>Conveyor components</i>	129
	<i>Conveyor support components</i>	171
	<i>Bearings</i>	185
	<i>Leveling pads</i>	205



steel chains

Series 812/815



pag. 8

Series 802



pag. 8

Series 8157



pag. 9

Series 512



pag. 9

Series 881 M



pag. 10

Series 881 TAB



pag. 10

Series 881 B



pag. 10

Series 8811 TAB



pag. 11

Series 8811 B



pag. 11


Series 8857 M



pag. 12



812/815 catena rettilinea / straight running chain / geradegängige Scharnierbandkette

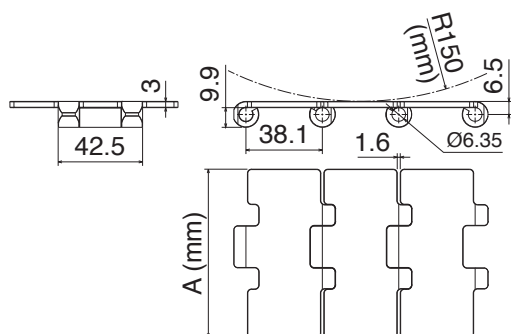


Part	Article-Nr.	Ref.	A	Weight kg/m	Max working load
1001	10010202	SS 812 K325	82,5	2,55	5500 N
1001	10010203	SS 812 K330	83,8	2,59	
1001	10010204	SS 812 K350	88,9	2,69	
1001	10010205	SS 812 K450	114,3	3,25	
1001	10010206	SS 812 K600	152,4	4,15	
1001	10010207	SS 812 K750	190,5	5,05	6000 N
1001	10010102	SSE 815 K325	82,5	2,55	
1001	10010103	SSE 815 K330	83,8	2,59	
1001	10010104	SSE 815 K350	88,9	2,69	
1001	10010105	SSE 815 K450	114,3	3,25	
1001	10010106	SSE 815 K600	152,4	4,15	
1001	10010107	SSE 815 K750	190,5	5,05	
1001	10010302	SSM 815 K325	82,5	2,55	6000 N
1001	10010303	SSM 815 K330	83,8	2,59	

Material		
01	SSE	Super-hard stainless steel
02	SS	Standard stainless steel
03	SSM	Max Speed

Pins: Austenitic Steel



802 catena rettilinea / straight running chain / geradegängige Scharnierbandkette

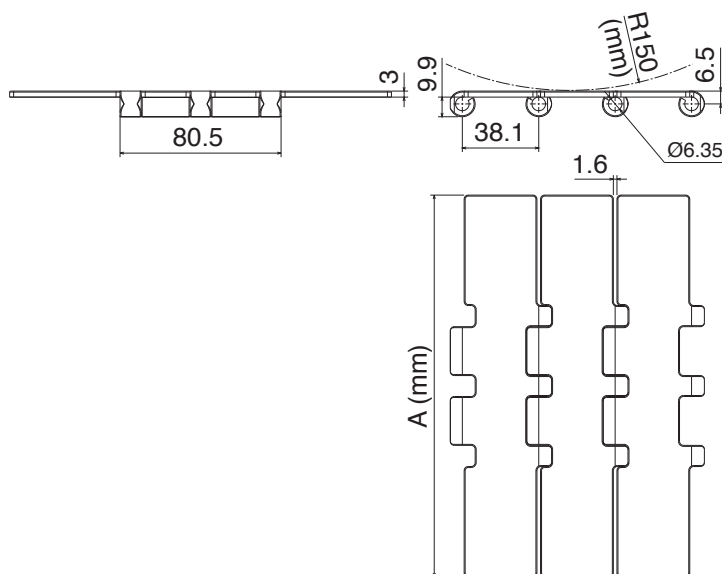

Part	Article-Nr.	Ref.	A	Weight kg/m	Max working load
1003	10030207	SS 802 K750	190,5	5,80	7000 N
1003	10030107	SSE 805 K750	190,5	5,80	9000 N

Material		
01	SSE	Super-hard stainless steel
02	SS	Standard stainless steel

Pins: Austenitic Steel



8157 catena rettilinea / straight running chain / geradegängige Scharnierbandkette




Part	Article-Nr.	Ref.	A	Weight kg/m	Max working load
1005	10050107	SSE 8157 K750	190,5	5,60	7000 N

Material

01 **SSE** Super-hard stainless steel

Pins: Austenitic Steel

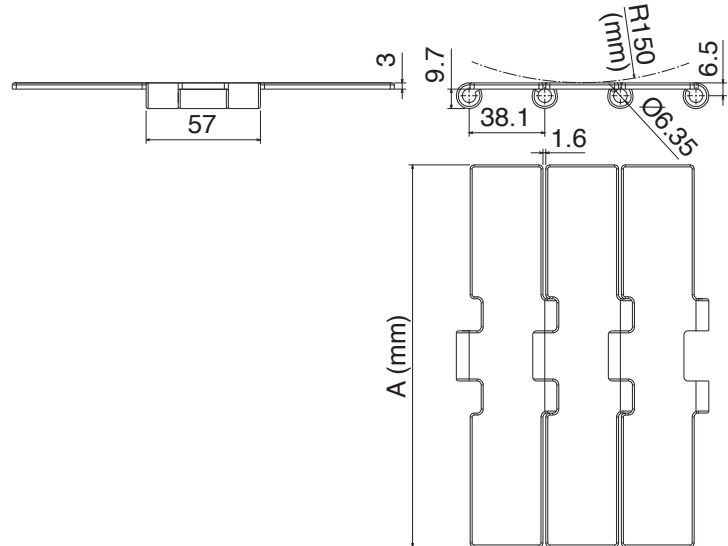

512 catena rettilinea / straight running chain / geradegängige Scharnierbandkette





Part	Article-Nr.	Ref.	A	Weight kg/m	Max working load
1007	10070100	SSE 512 K217	55,0	2,30	5000 N
1007	10070101	SSE 512 K236	60,0	2,40	
1007	10070108	SSE 512 K250	63,5	2,45	
1007	10070109	SSE 512 K283	72,0	2,65	

Material

01 **SSE** Super-hard stainless steel

Pins: Austenitic Steel

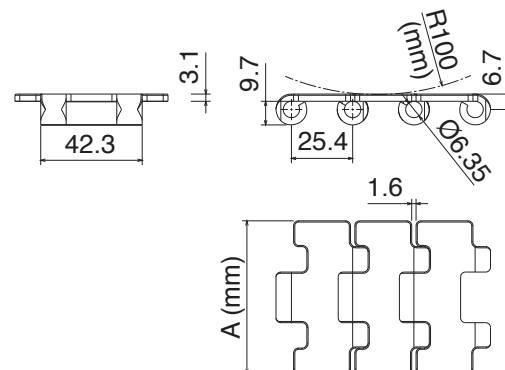

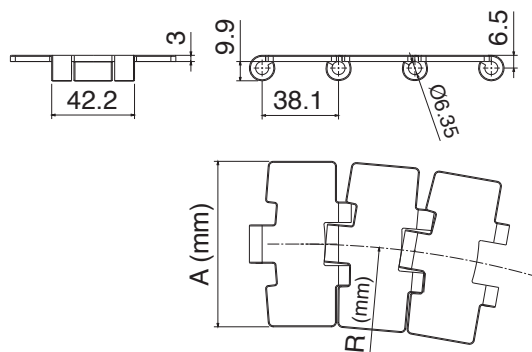

881 M catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette

Part	Article-Nr.	Ref.	A	R	Weight kg/m	Max working load
1008	10080202	SS 881 MO K325	82,5	500	2,55	4000 N
1008	10080203	SS 881 MO K330	83,8	500	2,59	
1008	10080205	SS 881 MO K450	114,3	500	3,10	
1008	10080207	SS 881 MO K750	190,5	500	4,85	

1008	10080102	SSE 881 MO K325	82,5	500	2,55	6000 N
1008	10080103	SSE 881 MO K330	83,8	500	2,59	
1008	10080105	SSE 881 MO K450	114,3	500	3,10	
1008	10080107	SSE 881 MO K750	190,5	500	4,85	

1008	10080302	SSM 881 MO K325	82,5	500	2,55	6000 N
1008	10080303	SSM 881 MO K330	83,8	500	2,59	

Material


- 01 **SSE** Super-hard stainless steel
- 02 **SS** Standard stainless steel
- 03 **SSM** **Max speed**

Pins: Ferritic Stainless Steel

Magnetic System



881 TAB catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette

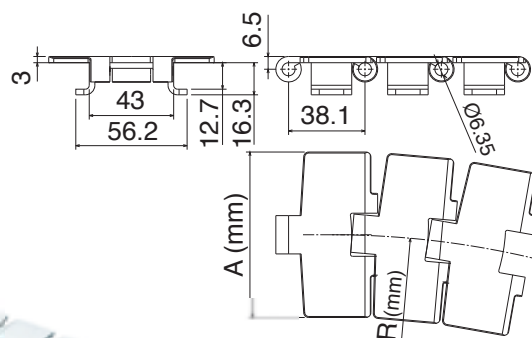

Part	Article-Nr.	Ref.	A	R	Weight kg/m	Max working load
1010	10100202	SS 881 TAB K325	82,5	457	3,00	4000 N
1010	10100102	SSE 881 TAB K325	82,5	457	3,00	6000 N
1010	10100105	SSE 881 TAB K450	114,3	500	3,69	
1010	10100107	SSE 881 TAB K750	190,5	500	5,50	

Material


- 01 **SSE** Super-hard stainless steel
- 02 **SS** Standard stainless steel

Pins: Austenitic Steel

Tab System



881 B catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette

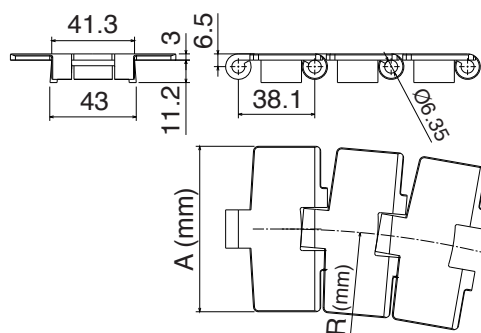

Part	Article-Nr.	Ref.	A	R	Weight kg/m	Max working load
1012	10120102	SSE 881 K325	82,5	457	2,95	6000 N
1012	10120105	SSE 881 K450	114,3	500	3,65	
1012	10120107	SSE 881 K750	190,5	500	5,45	

Material

- 01 **SSE** Super-hard stainless steel

Pins: Austenitic Steel

Bevel System




8811 TAB catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette



Part	Article-Nr.	Ref.	A	R	Weight kg/m	Max working load
1014	10140202	SS 8811 TAB K325	82,5	500	2,95	4000 N
1014	10140203	SS 8811 TAB K330	83,8	500	3,05	
1014	10140205	SS 8811 TAB K450	114,3	610	3,65	
1014	10140207	SS 8811 TAB K750	190,5	610	5,45	

1014	10140102	SSE 8811 TAB K325	82,5	500	2,95	6000 N
1014	10140103	SSE 8811 TAB K330	83,8	500	3,05	
1014	10140104	SSE 8811 TAB K350	88,9	500	3,15	
1014	10140105	SSE 8811 TAB K450	114,3	610	3,65	
1014	10140107	SSE 8811 TAB K750	190,5	610	5,45	

Material	
01	SSE Super-hard stainless steel
02	SS Standard stainless steel
Pins: Austenitic Steel	

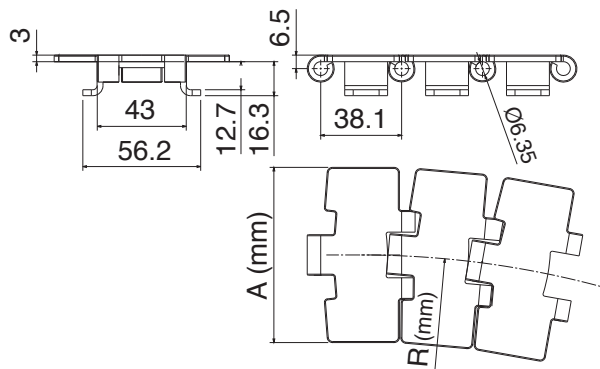


Tab System

8811 B catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette



Part	Article-Nr.	Ref.	A	R	Weight kg/m	Max working load
1016	10160102	SSE 8811 K325	82,5	500	2,90	6000 N
1016	10160104	SSE 8811 K350	88,9	500	3,15	
1016	10160105	SSE 8811 K450	114,3	610	3,60	
1016	10160107	SSE 8811 K750	190,5	610	5,40	

Material	
01	SSE Super-hard stainless steel
Pins: Austenitic Steel	

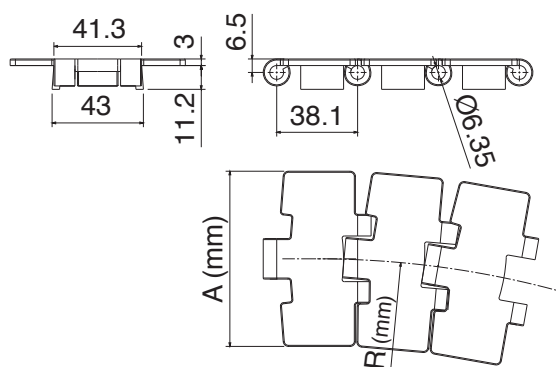


Bevel System



8857 M catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette

Part	Article-Nr.	Ref.	A	R	Weight kg/m	Max working load
1018	10180107	SSE 8857 M K750	190,5	750	5,30	7000 N

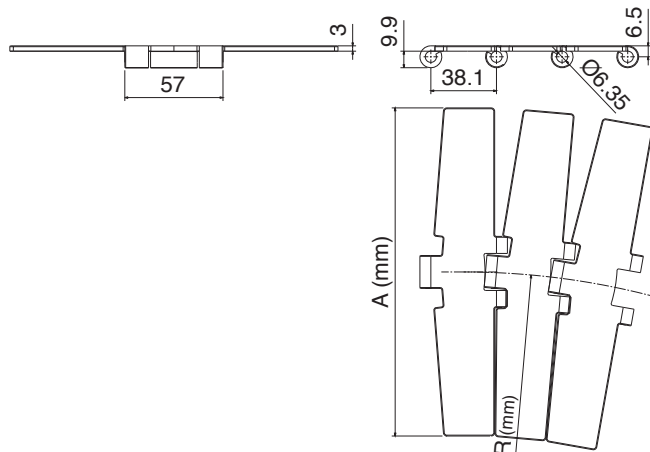

Material	
01	SSE Super-hard stainless steel
Pins: Ferritic Stainless Steel	



Magnetic System


 Series 820 pag. 14	 Series 828 pag. 14	 Series 831 pag. 15	 Series 821 pag. 15	 Series 821 GT pag. 16	 Series 821 LBP pag. 16
 Series 8257 pag. 17	 Series 8257 GT pag. 17	 Series 8257 LBP pag. 18	 Series 878 TAB pag. 18	 Series 879 M pag. 19	 Series 879 TAB pag. 19
 Series 880 M pag. 20	 Series 880 TAB pag. 20	 Series 880 B pag. 21	 Series 882 M pag. 21	 Series 882 M GT pag. 22	 Series 882 M LBP pag. 22
 Series 882 TAB pag. 23	 Series 882 TAB GT pag. 23	 Series 882 TAB LBP pag. 24	 Series 1873 GRIPPER pag. 25	 Series CC 600 pag. 26	 Series CC 600 TAB pag. 26



820

catena rettilinea / straight running chain / geradegängige Scharnierbandkette

Part	Article-Nr.	Ref.	A	Weight Kg/m
1101	11010102	820 K325	82,5	0,89
1101	11010103	820 K330	83,8	0,90
1101	11010104	820 K350	88,9	0,91
1101	11010114	820 K400	101,6	0,95
1101	11010105	820 K450	114,3	1,00
1101	11010106	820 K600	152,4	1,22
1101	11010107	820 K750	190,5	1,43

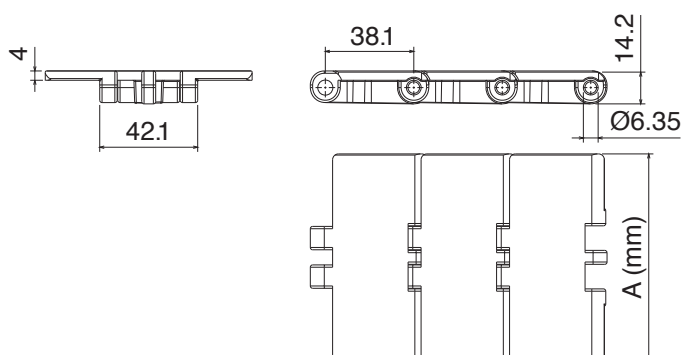

	Material	Breaking load
01	LF Standard Material Acetal Resin	5000 N
03	MX Available also in Max Performance	4000 N
08	MK	4800 N

Pins: Austenitic Steel




828

catena rettilinea / straight running chain / geradegängige Scharnierbandkette

Part	Article-Nr.	Ref.	A	Weight Kg/m
1102	11020102	828 K325	82,5	1,07
1102	11020103	828 K330	83,8	1,13

	Material	Breaking load
01	LF Standard Material Acetal Resin	6000 N
03	MX Available also in Max Performance	5000 N
08	MK	5700 N

Pins: Austenitic Steel

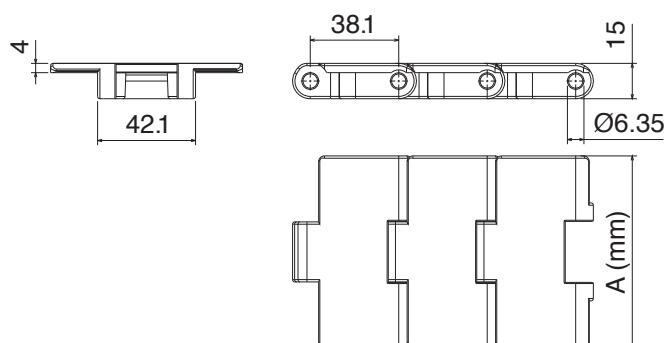

831


catena rettilinea / straight running chain / geradegängige Scharnierbandkette



Part	Article-Nr.	Ref.	A	Weight Kg/m
1103	11030102	831 K325	82,5	1,00
1103	11030105	831 K450	114,3	1,28
1103	11030107	831 K750	190,5	1,80

	Material	Breaking load
01	LF Standard Material Acetal Resin	5000 N
03	MX Available also in Max Performance	4000 N
08	MK	4800 N

Pins: Austenitic Steel

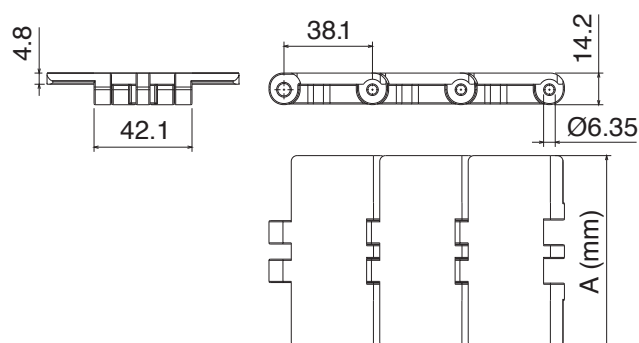

821


catena rettilinea / straight running chain / geradegängige Scharnierbandkette




Part	Article-Nr.	Ref.	A	Weight Kg/m
1104	11040107	821 K750	190,5	2,55
1104	11040108	821 K1000	254,0	3,05
1104	11040109	821 K1200	304,8	3,35

	Material	Breaking load
01	LF Standard Material Acetal Resin	8000 N
03	MX Available also in Max Performance	7500 N
08	MK	7900 N

Pins: Austenitic Steel

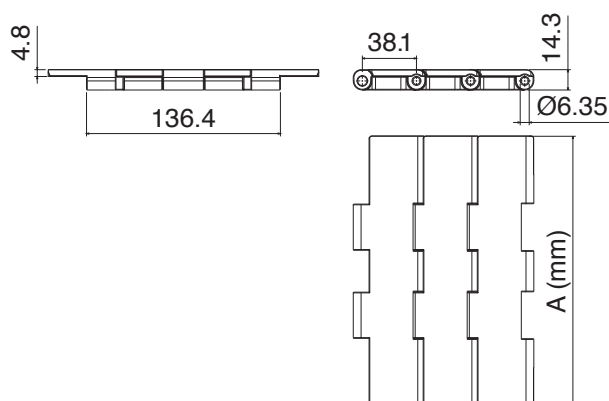

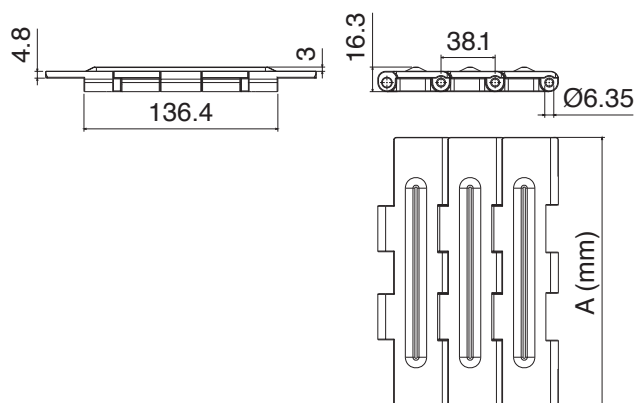


821 GT

catena rettilinea / straight running chain / geradegängige Scharnierbandkette

Part	Article-Nr.	Ref.	A	Weight Kg/m
1105	11050107	821 GT K750	190,5	2,25
1105	11050108	821 GT K1000	254,0	3,20
1105	11050109	821 GT K1200	304,8	3,70

	Material	Breaking load
01	LF Standard Material Acetal Resin	8000 N
03	MX Available also in Max Performance	7500 N

Rubber: Hardness 75ShA
TPR
Pins: Austenitic Steel

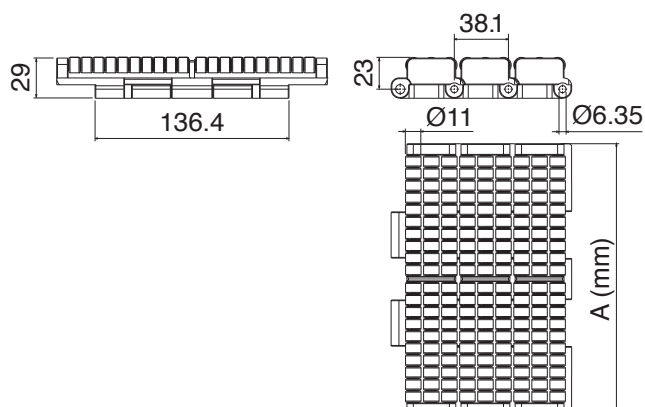

821 LBP

catena rettilinea / straight running chain / geradegängige Scharnierbandkette

Part	Article-Nr.	Ref.	A	Weight Kg/m
1106	11060107	821 LBP K750	190,5	5,70
1106	11060108	821 LBP K1000	254,0	7,05
1106	11060109	821 LBP K1200	304,8	8,21

	Material	Breaking load
01	LFA Standard Material Acetal Resin	8000 N

Roller
Acetal Resin
Pins: Austenitic Steel




8257

catena rettilinea / straight running chain / geradegängige Scharnierbandkette

Part	Article-Nr.	Ref.	A	Weight Kg/m
1107	11070107	8257 K750	190,5	2,20
1107	11070108	8257 K1000	254,0	2,50
1107	11070109	8257 K1200	304,8	2,85

	Material	Breaking load
01	LF Standard Material Acetal Resin	10000 N
03	MX Available also in Max Performance	9000 N
08	MK	9700 N

Pins: Austenitic Steel

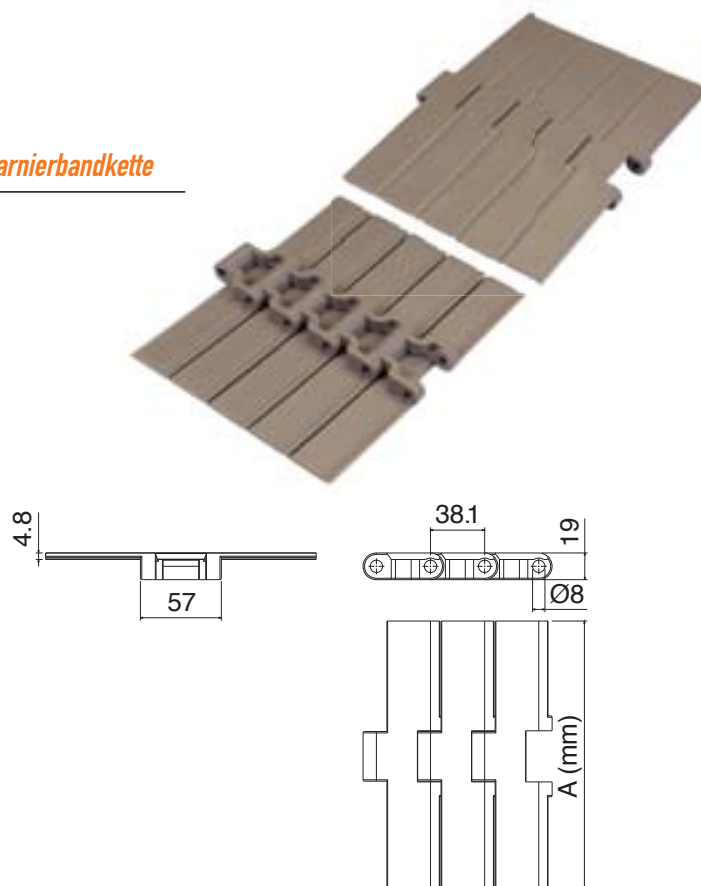

8257 GT


catena rettilinea / straight running chain / geradegängige Scharnierbandkette


Part	Article-Nr.	Ref.	A	Weight Kg/m
1108	11080107	8257 GT K750	190,5	2,25
1108	11080108	8257 GT K1000	254,0	2,60
1108	11080109	8257 GT K1200	304,8	2,95

	Material	Breaking load
01	LF Standard Material Acetal Resin	10000 N
03	MX Available also in Max Performance	9000 N

Rubber: Hardness 75ShA
TPR

Pins: Austenitic Steel

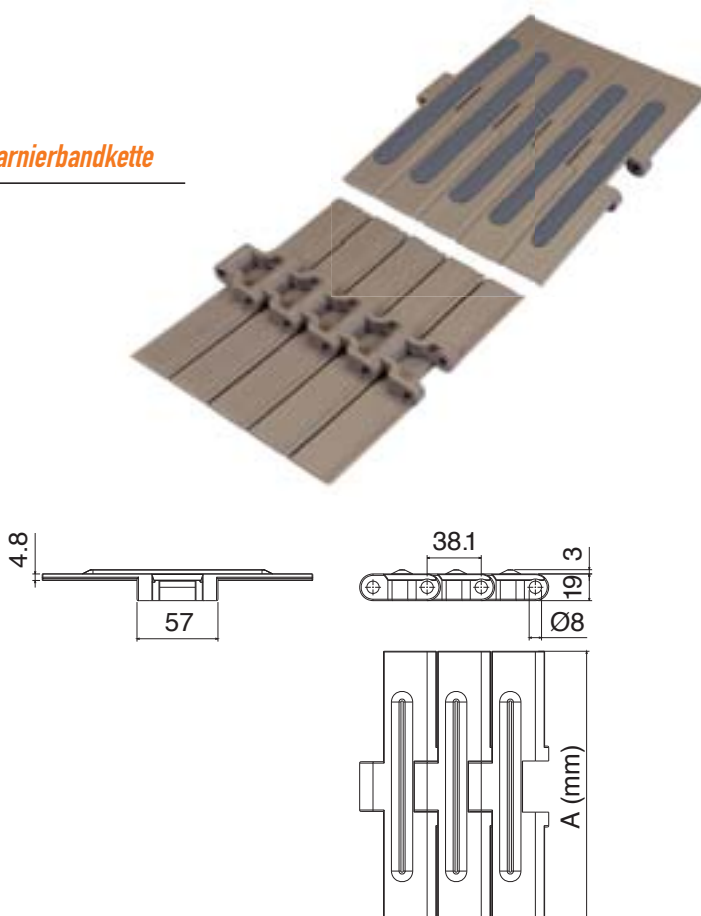

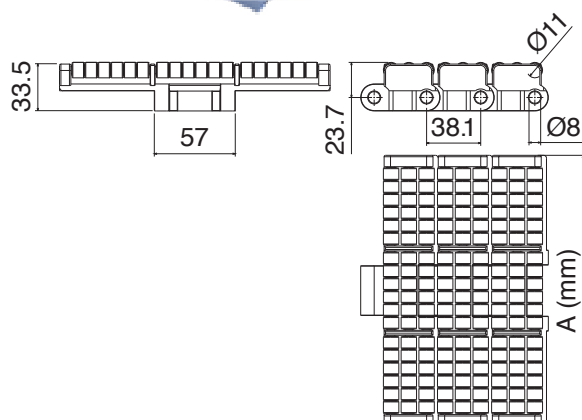


8257 LBP

catena rettilinea / straight running chain / geradgängige Scharnierbandkette

Part	Article-Nr.	Ref.	A	Weight Kg/m
1109	11090107	8257 LBP K750	190,5	5,65
1109	11090108	8257 LBP K1000	254,0	7,15
1109	11090109	8257 LBP K1200	304,8	8,05

	Material	Breaking load
01	LFA Standard Material Acetal Resin	10000 N
	Roller Acetal Resin	
	Pins: Austenitic Steel	

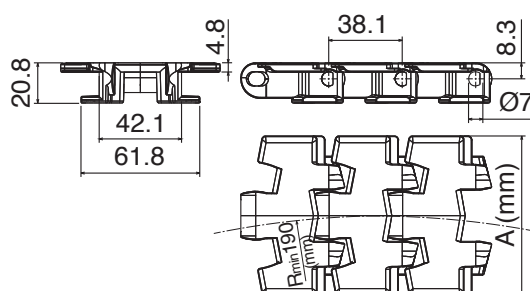

878 TAB

catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette

Part	Article-Nr.	Ref.	A	Weight Kg/m
1119	11190102	878 TAB K325	82,5	1,06
1119	11190105	878 TAB K450	114,3	1,18

	Material	Breaking load
01	LF Standard Material Acetal Resin	6000 N
03	MX Available also in Max Performance	5000 N
08	MK	5700 N
	Pins: Ferritic Stainless Steel	



Tab System

879 M



catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette



Part	Article-Nr.	Ref.	A	Weight Kg/m
1124	11240102	879 M K325	82,5	1,05
1124	11240105	879 M K450	114,3	1,15

	Material	Breaking load
01	LF Standard Material Acetal Resin	6000 N
03	MX Available also in Max Performance	5000 N
08	MK	5700 N

Pins: Ferritic Stainless Steel

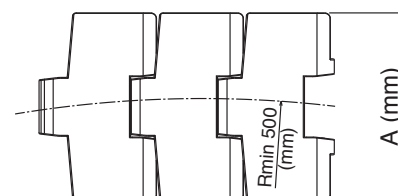

Max Performance

879 TAB




catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette



Part	Article-Nr.	Ref.	A	Weight Kg/m
1125	11250102	879 TAB K325	82,5	1,01
1125	11250105	879 TAB K450	114,3	1,13

	Material	Breaking load
01	LF Standard Material Acetal Resin	6000 N
03	MX Available also in Max Performance	5000 N
08	MK	5700 N

Pins: Ferritic Stainless Steel

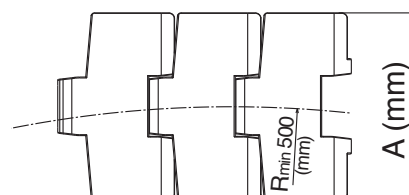

Tab System




880 M

catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette

Part	Article-Nr.	Ref.	A	Weight Kg/m
1110	11100102	880 M K325	82,5	1,05
1110	11100103	880 M K330	83,8	1,09
1110	11100105	880 M K450	114,3	1,15

	Material	Breaking load
01	LF Standard Material Acetal Resin	5800 N
03	MX Available also in Max Performance	5200 N
08	MK	5500 N

Pins: Ferritic Stainless Steel

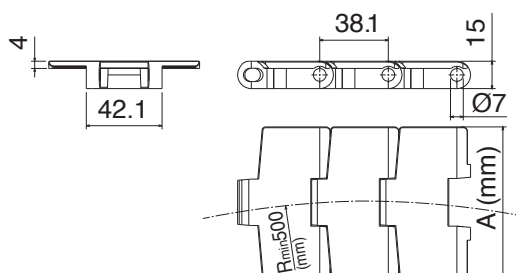

Max Performance




880 TAB

catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette

Part	Article-Nr.	Ref.	A	Weight Kg/m
1111	11110102	880 TAB K325	82,5	1,015
1111	11110103	880 TAB K330	83,8	1,018
1111	11110105	880 TAB K450	114,3	1,09

	Material	Breaking load
01	LF Standard Material Acetal Resin	6000 N
03	MX Available also in Max Performance	5000 N
08	MK	5700 N

Pins: Austenitic Steel

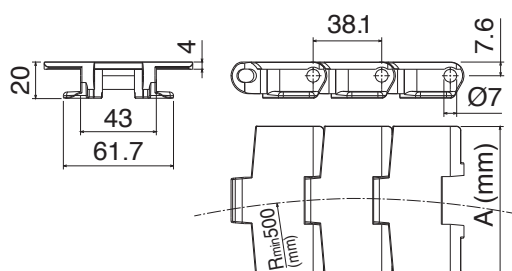

Tab System

880 B


catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette



Part	Article-Nr.	Ref.	A	Weight Kg/m
1112	11120102	880 B K325	82,5	0,89
1112	11120103	880 B K330	83,8	0,91
1112	11120105	880 B K450	114,3	1,05

	Material	Breaking load
01	LF Standard Material Acetal Resin	6000 N
03	MX Available also in Max Performance	5000 N
08	MK	5700 N

Pins: Austenitic Steel

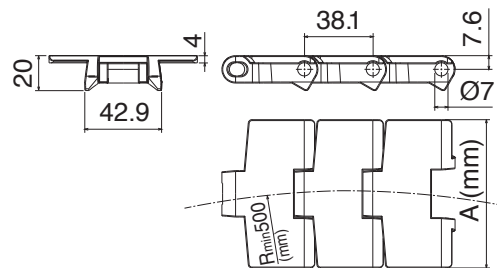

Bevel System

882 M


catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette




Part	Article-Nr.	Ref.	A	Weight Kg/m
1113	11130107	882 M K750	190,5	2,14
1113	11130108	882 M K1000	254,0	2,45
1113	11130109	882 M K1200	304,8	2,68

	Material	Breaking load
01	LF Standard Material Acetal Resin	10000 N
03	MX Available also in Max Performance	9000 N
08	MK	9500 N

Pins: Ferritic Stainless Steel

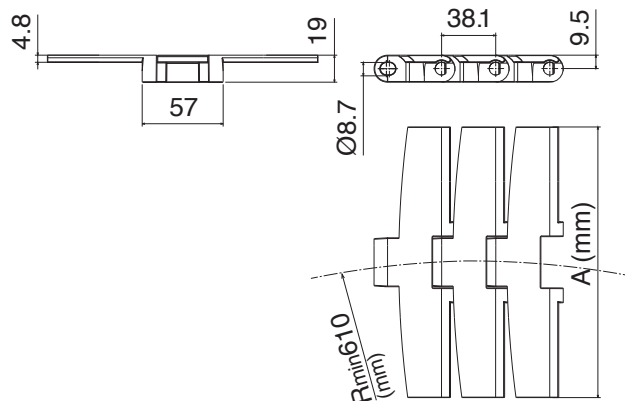

Magnetic System

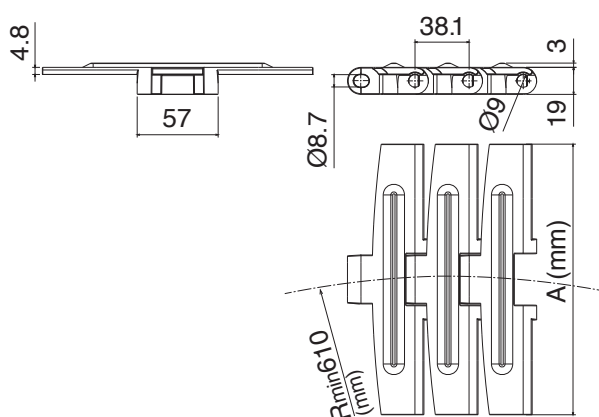

882 M GT

catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette

Part	Article-Nr.	Ref.	A	Weight Kg/m
1115	11150107	882 M GT K750	190,5	2,10
1115	11150108	882 M GT K1000	254,0	2,45
1115	11150109	882 M GT K1200	304,8	2,74

	Material	Breaking load
01	LF Standard Material Acetal Resin	10000 N
03	MX Available also in Max Performance	9000 N


Rubber: Hardness 75ShA

TPR

Pins: Ferritic Stainless Steel



Magnetic System

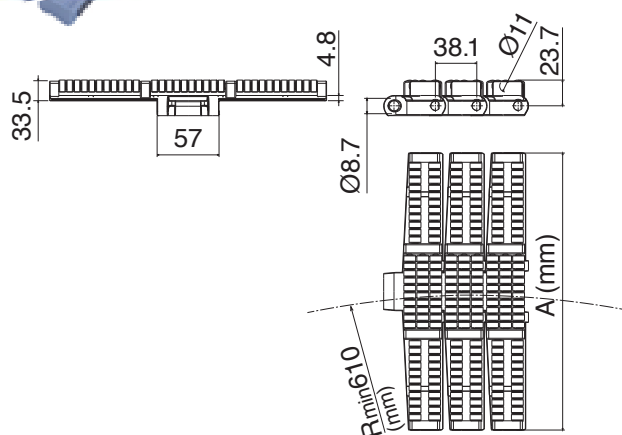

882 M LBP

catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette

Part	Article-Nr.	Ref.	A	Weight Kg/m
1117	11170107	882 M LBP K750	190,5	3,92
1117	11170108	882 M LBP K1000	254,0	4,94
1117	11170109	882 M LBP K1200	304,8	5,82

	Material	Breaking load
01	LFA Standard Material Acetal Resin	10000 N

Roller

Acetal Resin

Pins: Ferritic Stainless Steel



Magnetic System


882 TAB

catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette

Part	Article-Nr.	Ref.	A	Weight Kg/m
1114	11140105	882 TAB K450	114,3	2,05
1114	11140107	882 TAB K750	190,5	2,45
1114	11140108	882 TAB K1000	254,0	2,85
1114	11140109	882 TAB K1200	304,8	3,40

	Material	Breaking load
01	LF Standard Material Acetal Resin	10000 N
03	MX Available also in Max Performance	9000 N
08	MK	9500 N

Pins: Austenitic Steel

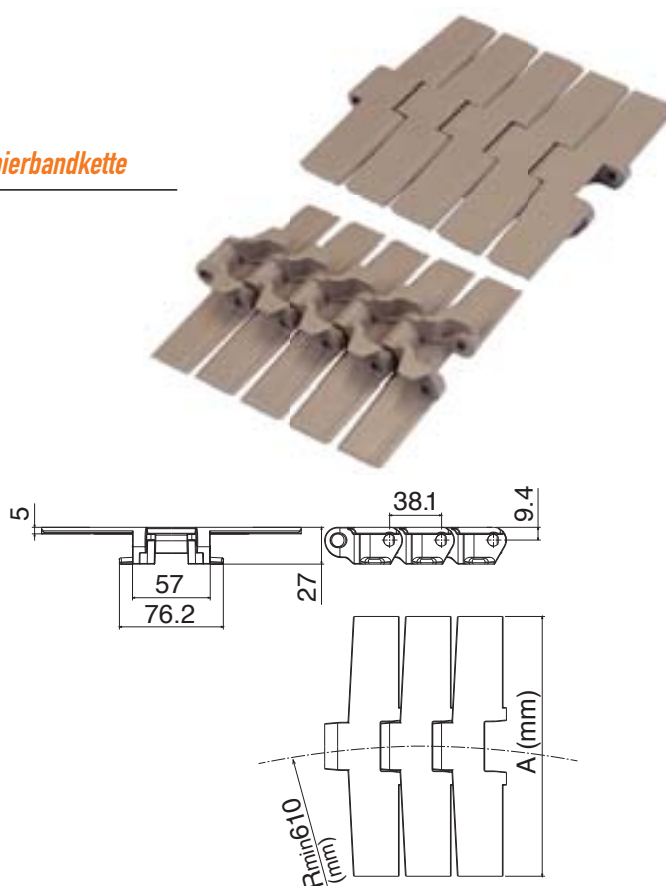

Tab System

882 TAB GT


catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette

Part	Article-Nr.	Ref.	A	Weight Kg/m
1116	11160107	882 TAB GT K750	190,5	2,37
1116	11160108	882 TAB GT K1000	254,0	2,67
1116	11160109	882 TAB GT K1200	304,8	2,92

	Material	Breaking load
01	LF Standard Material Acetal Resin	10000 N
03	MX Available also in Max Performance	9000 N

Rubber: Hardness 75ShA
TPR

Pins: Austenitic Steel

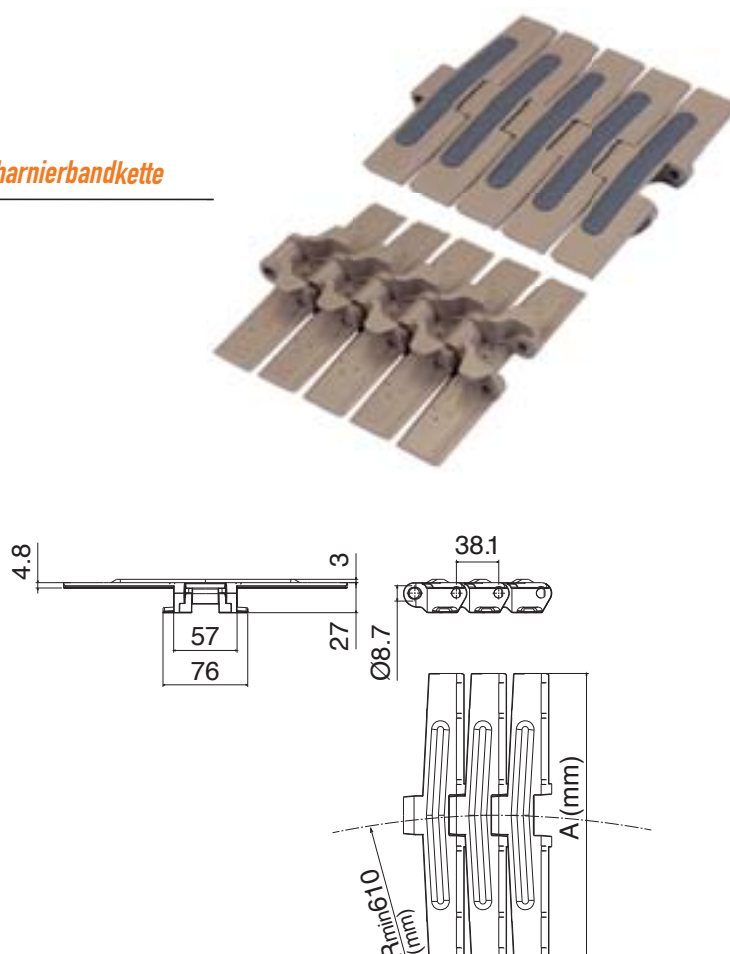

Tab System




882 TAB LBP

catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette

Part	Article-Nr.	Ref.	A	Weight Kg/m
1118	11180107	882 TAB LBP K750	190,5	4,70
1118	11180108	882 TAB LBP K1000	254,0	5,95
1118	11180109	882 TAB LBP K1200	304,8	6,55

Material		Breaking load
01	LFA Standard Material Acetal Resin	10000 N
Roller		
	Acetal Resin	
Pins: Austenitic Steel		

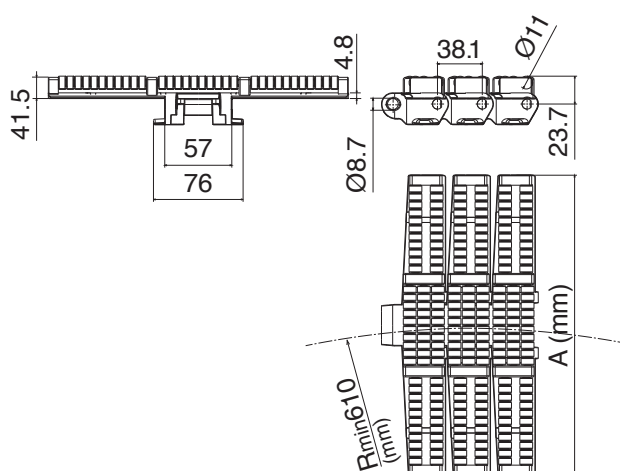

Tab System

1873 GRIPPER



catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette

Part	Article-Nr.	Plate	Chain	Rubber	Ref.	Breaking load	Weight Kg/m
1120	11200102	LFD	C45	TPR	1873 TAB K325 GR	27000 N	4,354
1120	11200202	LFD	Nickel Plated Steel	TPR	1873 NP TAB K325 GR	21000 N	
1120	11200302	LFD	Stainless Steel	TPR	1873 SS TAB K325 GR	21000 N	
1121	11210102	PP	C45	EPDM-PP	1873 TAB K325 GR	27000 N	
1121	11210202	PP	Nickel Plated Steel	EPDM-PP	1873 NP TAB K325 GR	21000 N	
1121	11210302	PP	Stainless Steel	EPDM-PP	1873 SS TAB K325 GR	21000 N	



Material		
PP	LFD	Standard Acetal Resin
Rubber: Hardness 45ShA		
TPR	EPDM-PP	
Roller chain		
C45; Nickel Plated Steel; Stainless Steel		

10 feet
3.048 m
80 links

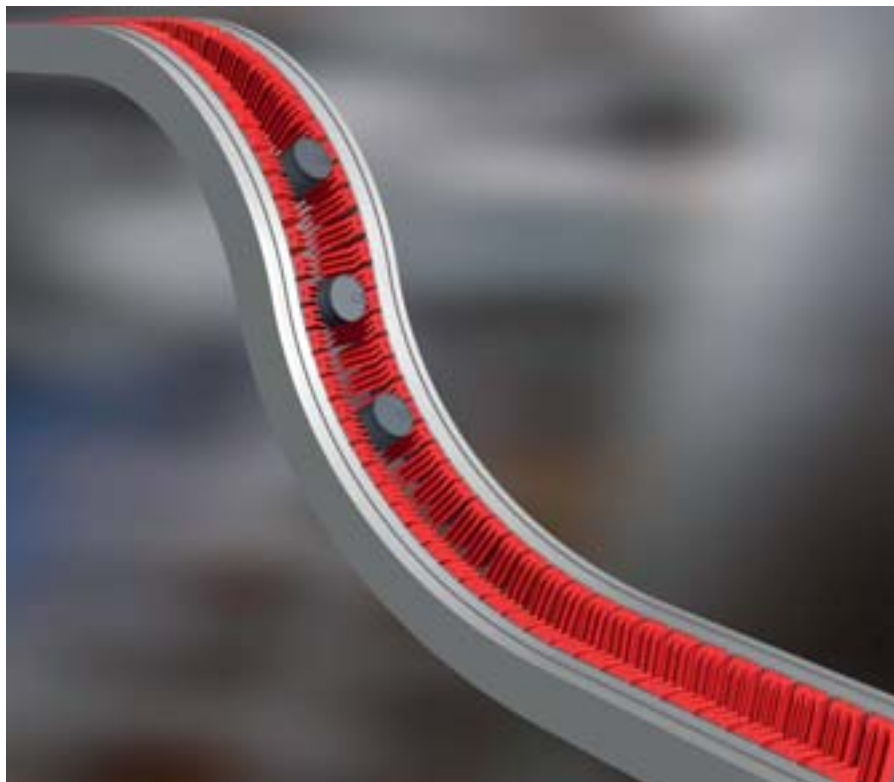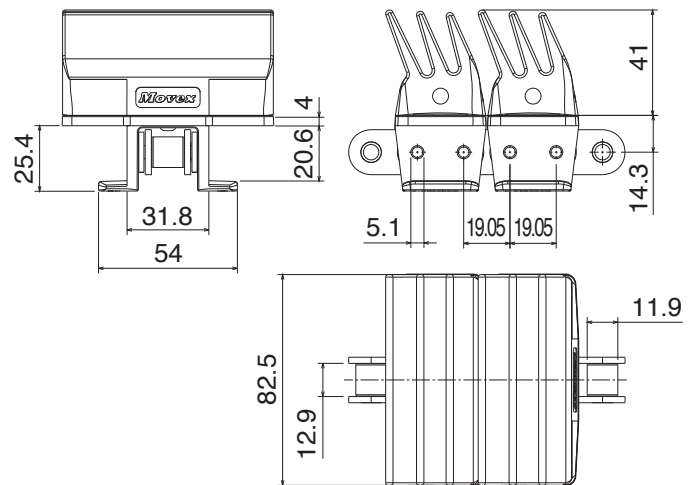




CC 600

catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette

Part	Article-Nr.	Ref.	Breaking load	Weight Kg/m
1122	11220400	CC 600	14000 N	1,35

Material		
04	LFN	Standard Material Acetal Resin
03	MX	Available also in Max Performance

Pins: Stainless Steel

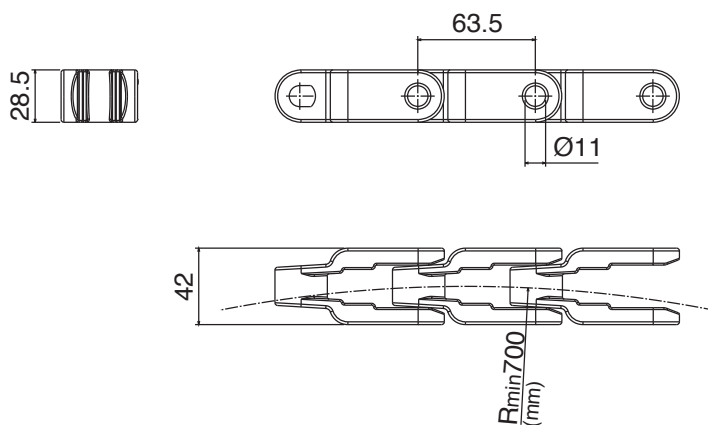


CC 600 TAB

catena curvilinea / Sideflexing chain / kurvengängige Scharnierbandkette

Part	Article-Nr.	Ref.	Breaking load	Weight Kg/m
1123	11230400	CC 600 TAB	14000 N	1,45

Material		
04	LFN	Standard Material Acetal Resin
03	MX	Available also in Max Performance

Pins: Stainless Steel

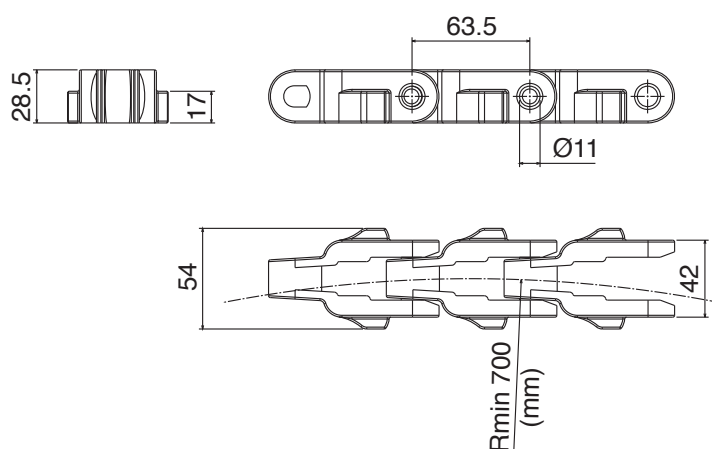

Ingranaggi

L'ingranaggio è uno dei più importanti componenti di un impianto di trasporto. Una ruota ben disegnata assicura una migliore performance e una maggior durata del trasportatore. Offriamo una vasta gamma di ruote fresate e stampate per soddisfare ogni necessità applicativa. Gli ingranaggi Movex nascono da anni di esperienza specifica ed offriamo la più avanzata soluzione:

1. Tutte le ruote sono concepite in due pezzi per un più facile montaggio/smontaggio sull'albero.
2. Tutte le superfici sono lisce per prevenire qualsiasi deposito.
3. I nostri ingranaggi sono ottenuti dal miglior poliammide per assicurare la più lunga durata e resistenza all'usura.
4. Il profilo del dente è specificamente disegnato per offrire la maggior superficie di contatto con la catena e/o il tappeto riducendo la forza esercitata su ciascun dente consentendo una vita più lunga dell'ingranaggio. Il design è sviluppato inoltre tenendo conto dell'allungamento naturale di catena/tappeto, garantendo agli stessi di performare senza problemi entro la soglia di tolleranza dell'allungamento.
5. Le viti in acciaio inossidabile vengono accoppiate con dadi autobloccanti e/o inserti nichelati per consentire un più facile smontaggio/riassemblaggio anche dopo un lungo periodo dall'installazione.

Sprockets


The sprocket is one of the most important parts of a conveyor. A well designed sprocket will ensure that the conveyor runs smoothly and efficiently for a long time. We have a wide variety of machined and molded sprockets to cover all application needs. Movex Sprockets are designed based on many years of experience to provide you the ultimate solution.

1. *All our sprockets are designed split so that it can be installed and uninstalled from the shaft easily.*
2. *All surfaces and edges from the sprockets are smooth to prevent dirt depositing easily. This makes cleaning easier, maintaining a high hygiene standard.*
3. *Our sprockets are machined from the best polyamide material to ensure longer wear life.*
4. *The sprocket teeth are uniquely designed to provide maximum contact surface with the chain henceforth giving lowest applied force per tooth. This ensures longer wear life for the sprocket. In addition the sprockets are designed in such a way that chain elongation tolerances can be absorbed. This will assure a life-long positive engagement between chain and sprocket.*
5. *Screws used to assemble the sprockets are paired with nickel or zinc plated steel nuts to ensure easy removal.*


Kettenräder

Das Kettenrad ist eines der wichtigsten Komponenten in Transportanlagen. Eine intelligentes Design gewährleistet einen ruhigen Lauf und Effizienz für einen langen Zeitraum. Wir bieten ein umfangreiches Programm in gefräster oder gespritzter Ausführung um Ihren Anforderungen entgegen zu kommen. Movex Kettenräder basieren auf jahrelangen Erfahrungen aus den verschiedenen Industrien und vereinen diese Erkenntnisse in einem innovativem Design.

1. *Alle unsere Kettenräder sind zweigeteilt, d.h. einfache Montage und Demontage ohne großen Zeitaufwand*
2. *Alle Oberflächen sind glatt um Schmutzablagerungen zu vermeiden dies erleichtert eine schnelle und einfache Reinigung.*
3. *Die Materialien sind so gewählt um eine längere Lebensdauer bieten zu können*
4. *Die Zahnform ist so gewählt um maximale Kontaktfläche mit der Kette / Mattenkette zu erzielen. Dies ermöglicht eine länger Lebensdauer des Kettenrades. Die Ausführung ist so gewählt das eine Kettenlängung vom Kettenrad aufgenommen werden kann ohne sofort die Kette tauschen zu müssen.*
5. *Schrauben aus Edelstahl verbunden mit einer selbstsichernde Mutter aus vernickeltem Stahl. Dies garantiert eine problemlose Demontage auch noch nach Jahren.*

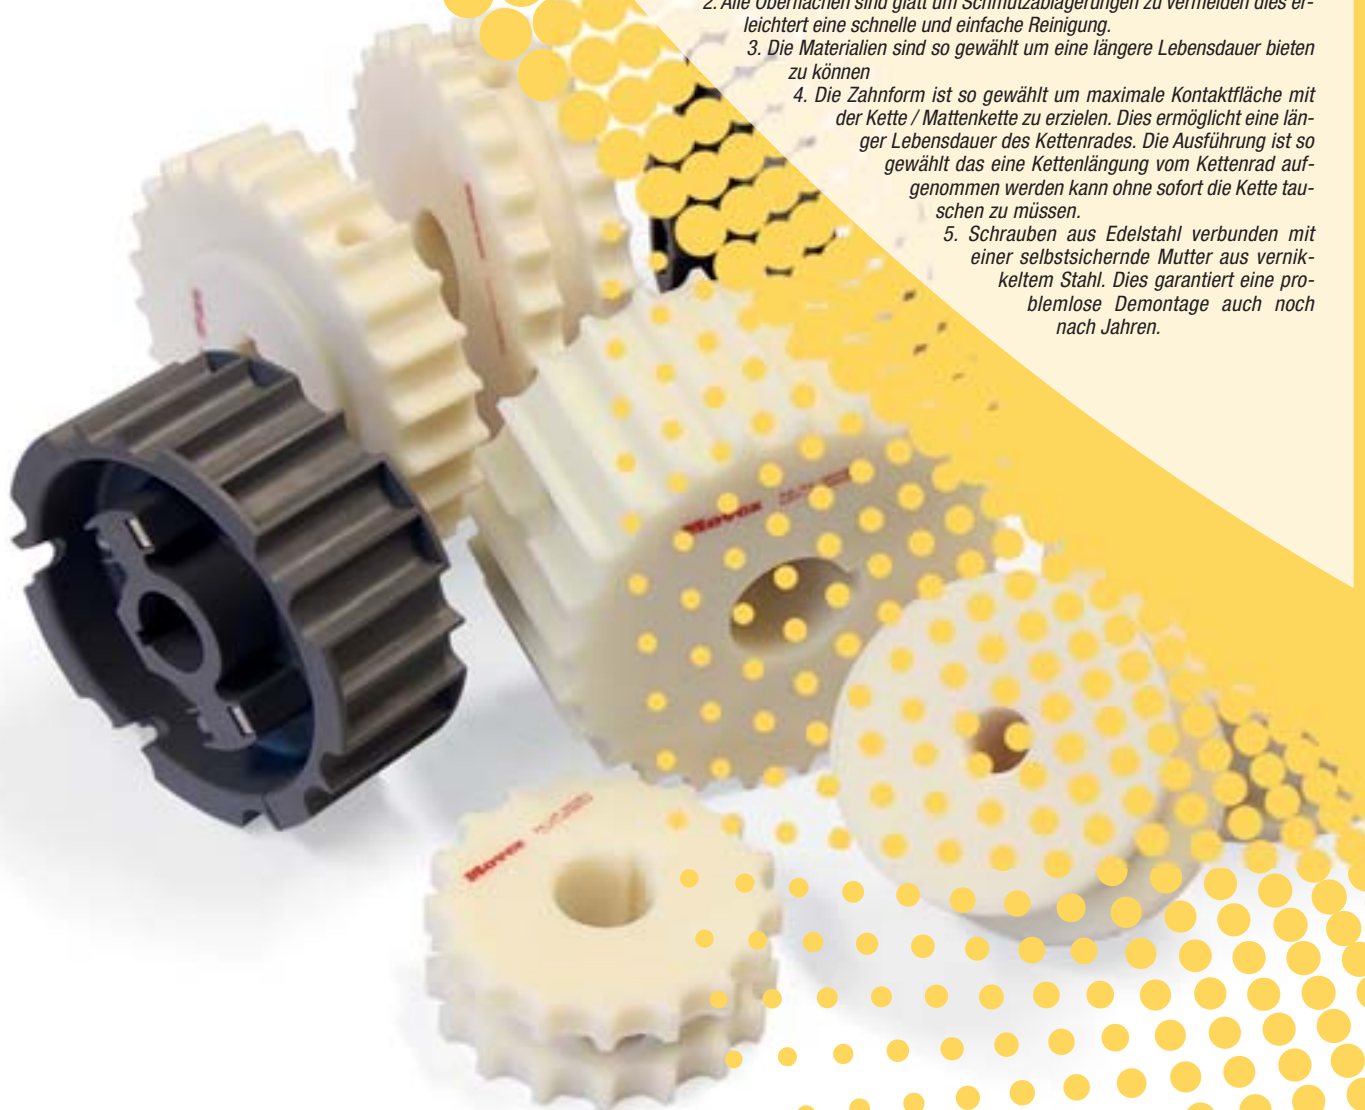


Technical information tolerances and dimensions




SPLIT SPROCKET / ISO 773 - DIN 6885					
ØD		A		H	
Nom.	Tol.	Nom.	Tol.	Nom.	Tol.
20	P9	6	P9	22.8	+0.1/0
25	P9	8	P9	28.3	+0.2/0
30	P9	8	P9	33.3	+0.2/0
35	P9	10	P9	38.3	+0.2/0
40	P9	12	P9	43.3	+0.2/0
45	P9	14	P9	48.8	+0.2/0
50	P9	14	P9	53.8	+0.2/0

SPLT SPROCKET "PLUS" VERSION					
D		A		H	
Nom.	Tol.	Nom.	Tol.	Nom.	Tol.
20	+0.25/+0.15	6	+0.2/+0.3	22.8	+0.2/+0.4
25	+0.25/+0.15	8	+0.2/+0.3	28.3	+0.2/+0.4
30	+0.25/+0.15	8	+0.2/+0.3	33.3	+0.2/+0.4
35	+0.25/+0.15	10	+0.2/+0.3	38.3	+0.2/+0.4
40	+0.25/+0.15	12	+0.2/+0.3	43.3	+0.2/+0.4
45	+0.25/+0.15	14	+0.2/+0.3	48.8	+0.2/+0.4
50	+0.25/+0.15	14	+0.2/+0.3	53.8	+0.2/+0.4



IDLER Ød	
Nom.	Tol.
20	+0.3/+0.4
25	+0.3/+0.4
30	+0.3/+0.4
35	+0.3/+0.4
40	+0.3/+0.4
45	+0.3/+0.4
50	+0.3/+0.4



SQUARE BORE AxA	
Nom.	Tol.
20x20	+0.3/+0.5
25x25	+0.3/+0.5
30x30	+0.3/+0.5
35x35	+0.3/+0.5
40x40	+0.3/+0.5
45x45	+0.3/+0.5
50x50	+0.3/+0.5

chain sprockets

Series 815



pag. 30

Series 815



pag. 30

Series 815



pag. 31

Series 815



pag. 31

Series 881



pag. 32

Series 881



pag. 32

Series 881



pag. 33

Series 881



pag. 33

Series 805



pag. 34

Series 805



pag. 34

Series 8157



pag. 35

Series 8157



pag. 35

Series 820



pag. 36

Series 820



pag. 36

Series 820



pag. 37

Series 820



pag. 37

Series 880



pag. 38

Series 880



pag. 38

Series 880



pag. 39

Series 880



pag. 39

Series 882



pag. 40

Series 882



pag. 40

Series 882



pag. 41

Series 882



pag. 41

Series 512



pag. 42

Series 512



pag. 42

Series 815



pag. 43

Series 8157



pag. 43

Series 805




pag. 44

Series CC600




pag. 44

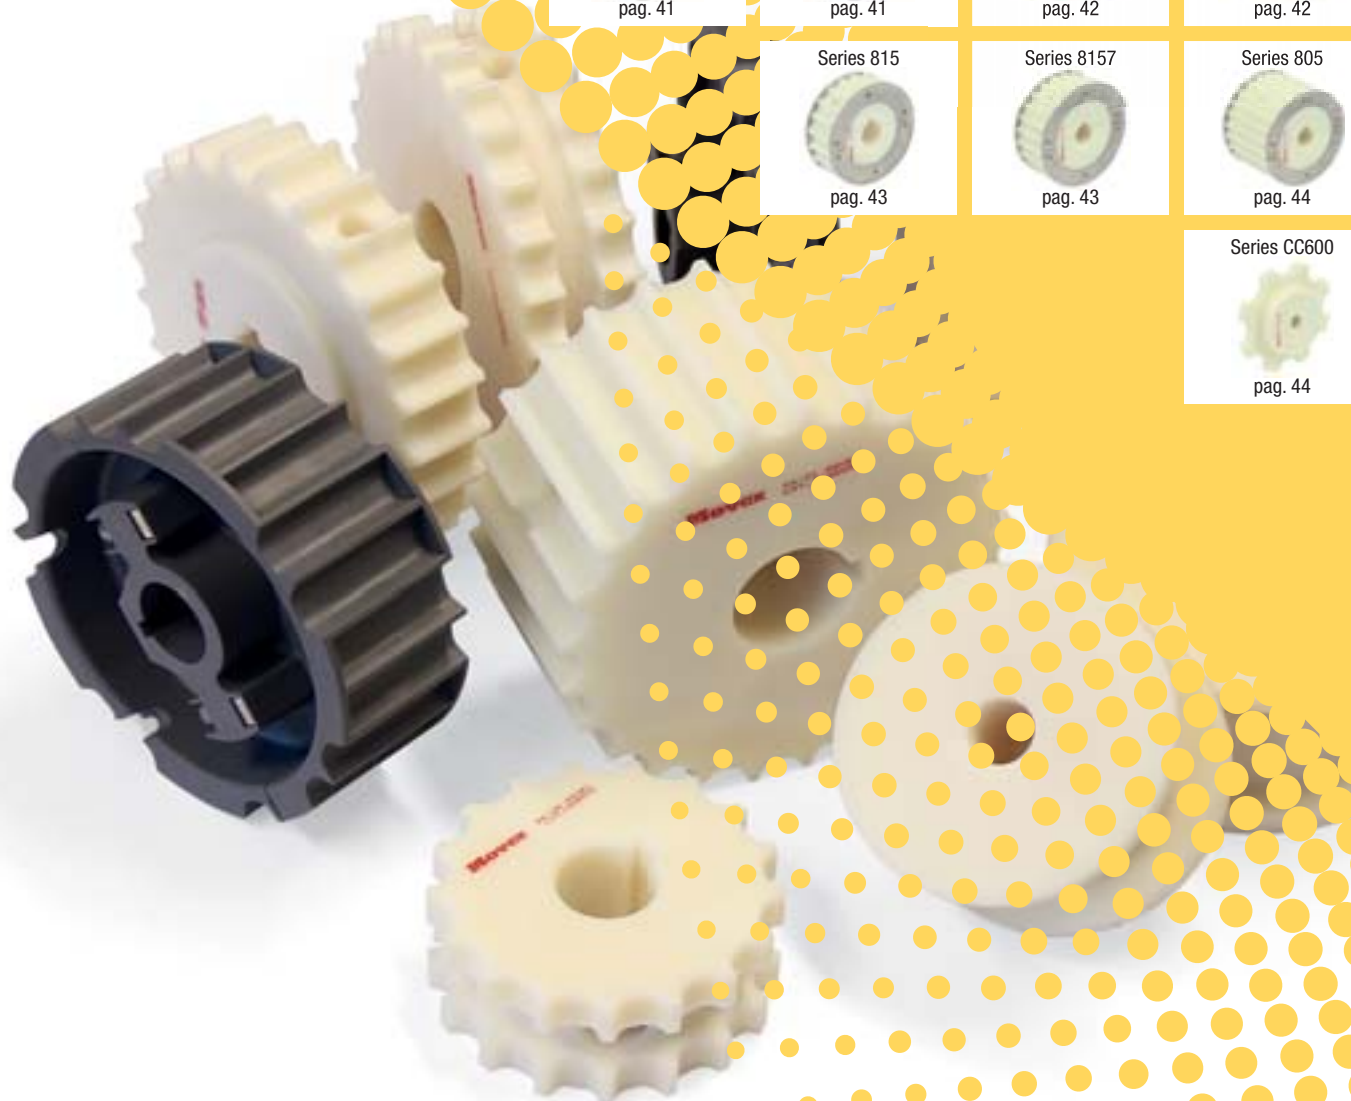

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl




Ruota traino divisa, fresata / Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

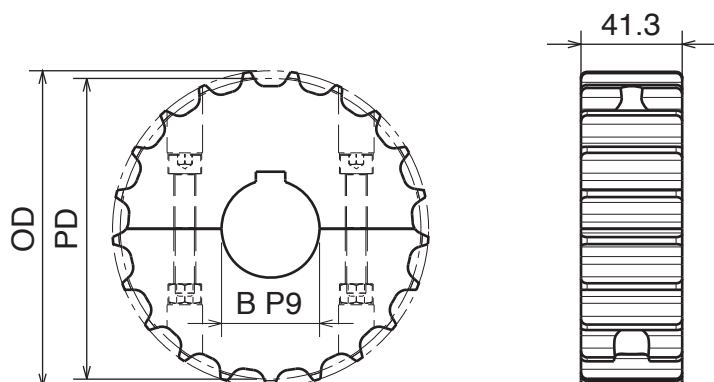

Part	Article-Nr.	Z-	Bore	PD	OD
501	50101	17	25	105,5	103,9
501	50102		30		
501	50103		35		
501	50104		40		
502	50201	19	25	117,3	117,0
502	50202		30		
502	50203		35		
502	50204		40		
503	50301	21	25	129,3	129,0
503	50302		30		
503	50303		35		
503	50304		40		
504	50401	23	25	141,2	142,0
504	50402		30		
504	50403		35		
504	50404		40		
505	50501	25	25	153,2	154,0
505	50502		30		
505	50503		35		
505	50504		40		
506	50601	27	25	165,2	166,8
506	50602		30		
506	50603		35		
506	50604		40		
507	50701	29	25	177,2	178,5
507	50702		30		
507	50703		35		
507	50704		40		



Ruota rinvio divisa, fresata / Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

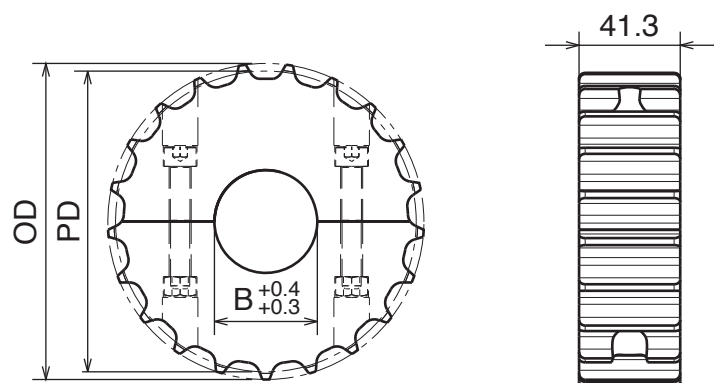


Part	Article-Nr.	Z-	Bore	PD	OD
501	50150	17	18*	105,5	103,9
501	50151		25		
501	50152		30		
501	50153		35		
501	50154		40		
502	50250	19	18*	117,3	117,0
502	50251		25		
502	50252		30		
502	50253		35		
502	50254		40		
503	50350	21	18*	129,3	129,0
503	50351		25		
503	50352		30		
503	50353		35		
503	50354		40		
504	50450	23	18*	141,2	142,0
504	50451		25		
504	50452		30		
504	50453		35		
504	50454		40		
505	50550	25	18*	153,2	154,0
505	50551		25		
505	50552		30		
505	50553		35		
505	50554		40		
506	50650	27	18*	165,2	166,8
506	50651		25		
506	50652		30		
506	50653		35		
506	50654		40		
507	50750	29	18*	177,2	178,5
507	50751		25		
507	50752		30		
507	50753		35		
507	50754		40		

Materiale:	Material:	Materialien:
Poliammide rinforzato	Polyamide reinforced	Verstärktes Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ottone nichelato	Nuts: nickel plated brass	Mutter: Messing vernickelt


Ruota traino divisa, stampata / Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

Part	Article-Nr.	Z-	Bore	PD	OD
508	50801	21	25	129,3	129,0
508	50802		30		
508	50803		35		
508	50804		40		
509	50901	23	25	141,2	142,0
509	50902		30		
509	50903		35		
509	50904		40		
510	51001	25	25	153,2	154,0
510	51002		30		
510	51003		35		
510	51004		40		

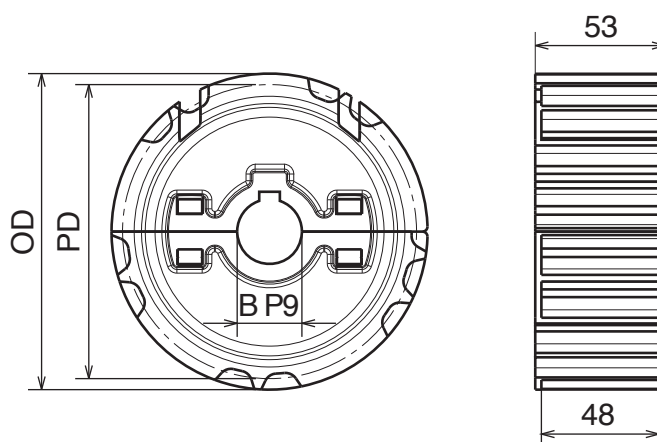

Ruota rinvio divisa, stampata / Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt


Part	Article-Nr.	Z-	Bore	PD	OD
508	50851	21	25	129,3	129,0
508	50852		30		
508	50853		35		
508	50854		40		
509	50951	23	25	141,2	142,0
509	50952		30		
509	50953		35		
509	50954		40		
510	51051	25	25	153,2	154,0
510	51052		30		
510	51053		35		
510	51054		40		

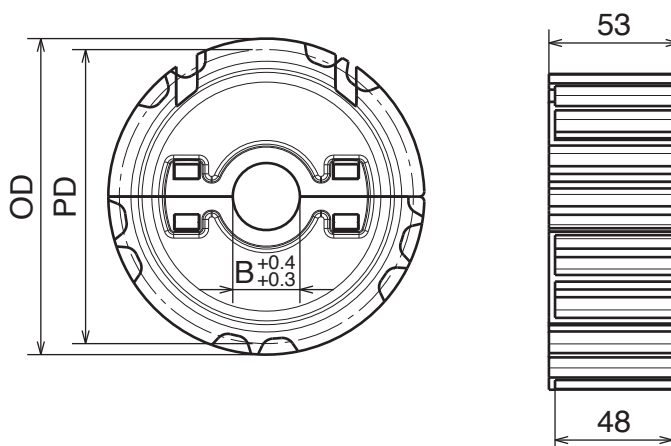

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl




Ruota traino divisa, fresata / Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

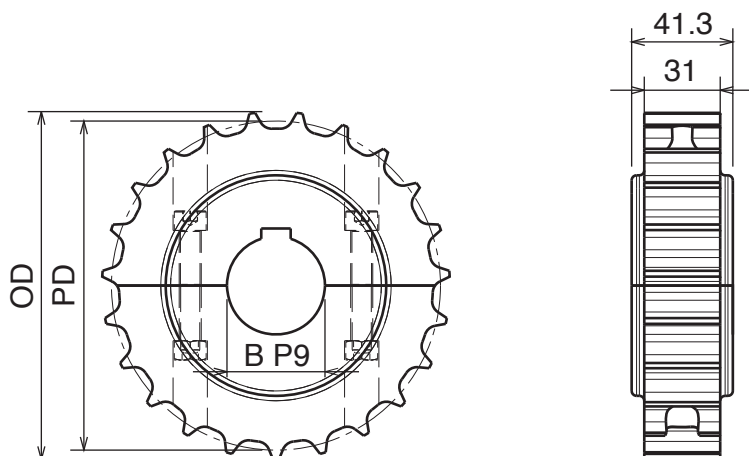

Part	Article-Nr.	Z-	Bore	PD	OD
511	51101	17	25	105,5	103,9
511	51102	30			
511	51103	35			
511	51104	40			
512	51201	19	25	117,3	117,0
512	51202	30			
512	51203	35			
512	51204	40			
513	51301	21	25	129,3	129,0
513	51302	30			
513	51303	35			
513	51304	40			
514	51401	23	25	141,2	142,0
514	51402	30			
514	51403	35			
514	51404	40			
515	51501	25	25	153,2	154,0
515	51502	30			
515	51503	35			
515	51504	40			
516	51601	27	25	165,2	166,8
516	51602	30			
516	51603	35			
516	51604	40			
517	51701	29	25	177,2	178,5
517	51702	30			
517	51703	35			
517	51704	40			



Ruota rinvio divisa, fresata / Split idler sprocket, machined / geteiltes Umlenkrad, gefräst


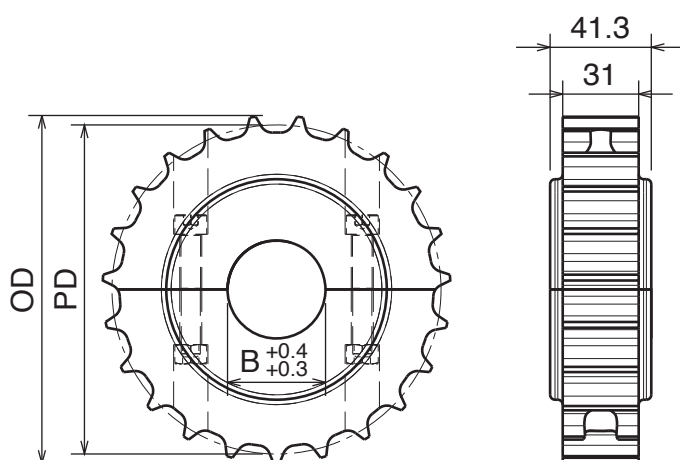


Part	Article-Nr.	Z-	Bore	PD	OD
511	51150	17	18*	105,5	103,9
511	51151	25			
511	51152	30			
511	51153	35			
511	51154	40			
512	51250	19	18*	117,3	117,0
512	51251	25			
512	51252	30			
512	51253	35			
512	51254	40			
513	51350	21	18*	129,3	129,0
513	51351	25			
513	51352	30			
513	51353	35			
513	51354	40			
514	51450	23	18*	141,2	142,0
514	51451	25			
514	51452	30			
514	51453	35			
514	51454	40			
515	51550	25	18*	153,2	154,0
515	51551	25			
515	51552	30			
515	51553	35			
515	51554	40			
516	51650	27	18*	165,2	166,8
516	51651	25			
516	51652	30			
516	51653	35			
516	51654	40			
517	51750	29	18*	177,2	178,5
517	51751	25			
517	51752	30			
517	51753	35			
517	51754	40			

Materiale:	Material:	Materialien:
Poliammide rinforzato	Polyamide reinforced	Verstärktes Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ottone nichelato	Nuts: nickel plated brass	Mutter: Messing vernickelt


Ruota traino divisa, stampata / Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

Part	Article-Nr.	Z-	Bore	PD	OD
518	51801	21	25	129,3	129,0
518	51802		30		
518	51803		35		
518	51804		40		
519	51901	23	25	141,2	142,0
519	51902		30		
519	51903		35		
519	51904		40		
520	52001	25	25	153,2	154,0
520	52002		30		
520	52003		35		
520	52004		40		

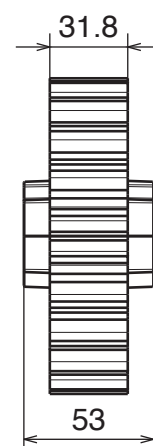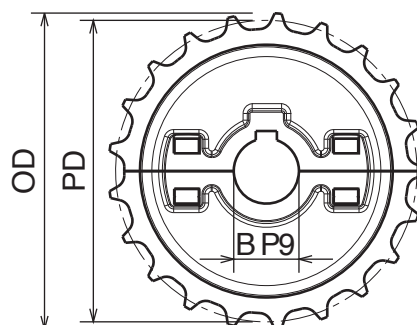

Ruota rinvio divisa, stampata / Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt


Part	Article-Nr.	Z-	Bore	PD	OD
518	51851	21	25	129,3	129,0
518	51852		30		
518	51853		35		
518	51854		40		
519	51951	23	25	141,2	142,0
519	51952		30		
519	51953		35		
519	51954		40		
520	52051	25	25	153,2	154,0
520	52052		30		
520	52053		35		
520	52054		40		

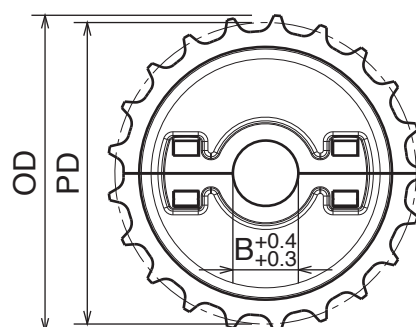

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl




Ruota traino divisa, fresata / Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

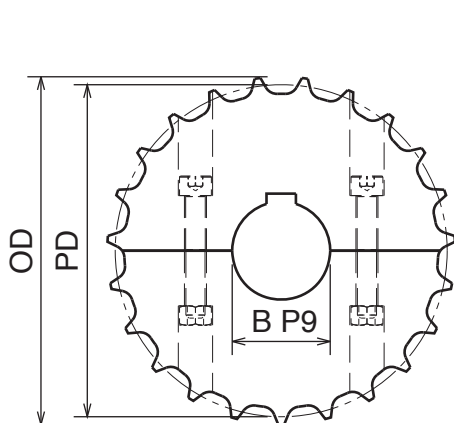

Part	Article-Nr.	Z-	Bore	PD	OD
521	52101	17	25	105,5	103,9
521	52102		30		
521	52103		35		
521	52104		40		
522	52201	19	25	117,3	117,0
522	52202		30		
522	52203		35		
522	52204		40		
523	52301	21	25	129,3	129,0
523	52302		30		
523	52303		35		
523	52304		40		
524	52401	23	25	141,2	142,0
524	52402		30		
524	52403		35		
524	52404		40		
525	52501	25	25	153,2	154,0
525	52502		30		
525	52503		35		
525	52504		40		
526	52601	27	25	165,2	166,8
526	52602		30		
526	52603		35		
526	52604		40		
527	52701	29	25	177,2	178,5
527	52702		30		
527	52703		35		
527	52704		40		



Ruota rinvio divisa, fresata / Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

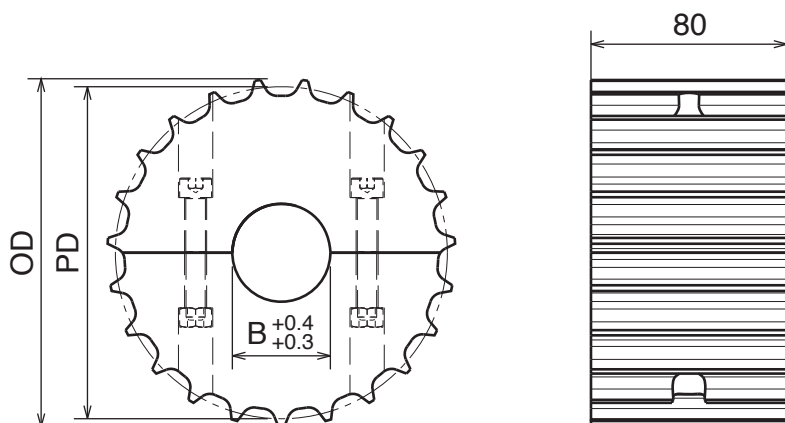


Part	Article-Nr.	Z-	Bore	PD	OD
521	52150	17	18*	105,5	103,9
521	52151		25		
521	52152		30		
521	52153		35		
521	52154		40		
522	52250	19	18*	117,3	117,0
522	52251		25		
522	52252		30		
522	52253		35		
522	52254		40		
523	52350	21	18*	129,3	129,0
523	52351		25		
523	52352		30		
523	52353		35		
523	52354		40		
524	52450	23	18*	141,2	142,0
524	52451		25		
524	52452		30		
524	52453		35		
524	52454		40		
525	52550	25	18*	153,2	154,0
525	52551		25		
525	52552		30		
525	52553		35		
525	52554		40		
526	52650	27	18*	165,2	166,8
526	52651		25		
526	52652		30		
526	52653		35		
526	52654		40		
527	52750	29	18*	177,2	178,5
527	52751		25		
527	52752		30		
527	52753		35		
527	52754		40		

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl



Ruota traino divisa, fresata / Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

Part	Article-Nr.	Z-	Bore	PD	OD
528	52801	17	25	105,5	103,9
528	52802		30		
528	52803		35		
528	52804		40		
529	52901	19	25	117,3	117,0
529	52902		30		
529	52903		35		
529	52904		40		
530	53001	21	25	129,3	129,0
530	53002		30		
530	53003		35		
530	53004		40		
531	53101	23	25	141,2	142,0
531	53102		30		
531	53103		35		
531	53104		40		
532	53201	25	25	153,2	154,0
532	53202		30		
532	53203		35		
532	53204		40		
533	53301	27	25	165,2	166,8
533	53302		30		
533	53303		35		
533	53304		40		
534	53401	29	25	177,2	178,5
534	53402		30		
534	53403		35		
534	53404		40		

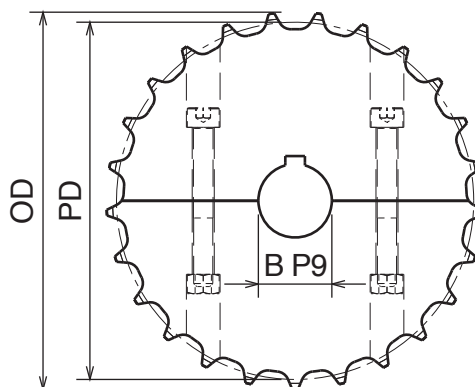

Ruota rinvio divisa, fresata / Split idler sprocket, machined / geteiltes Umlenkrad, gefräst


Part	Article-Nr.	Z-	Bore	PD	OD
528	52850	17	18*	105,5	103,9
528	52851		25		
528	52852		30		
528	52853		35		
528	52854		40		
529	52950	19	18*	117,3	117,0
529	52951		25		
529	52952		30		
529	52953		35		
529	52954		40		
530	53050	21	18*	129,3	129,0
530	53051		25		
530	53052		30		
530	53053		35		
530	53054		40		
531	53150	23	18*	141,2	142,0
531	53151		25		
531	53152		30		
531	53153		35		
531	53154		40		
532	53250	25	18*	153,2	154,0
532	53251		25		
532	53252		30		
532	53253		35		
532	53254		40		
533	53350	27	18*	165,2	166,8
533	53351		25		
533	53352		30		
533	53353		35		
533	53354		40		
534	53450	29	18*	177,2	178,5
534	53451		25		
534	53452		30		
534	53453		35		
534	53454		40		

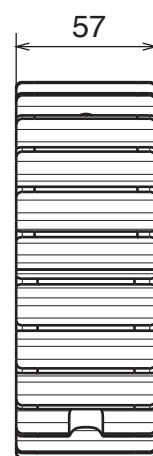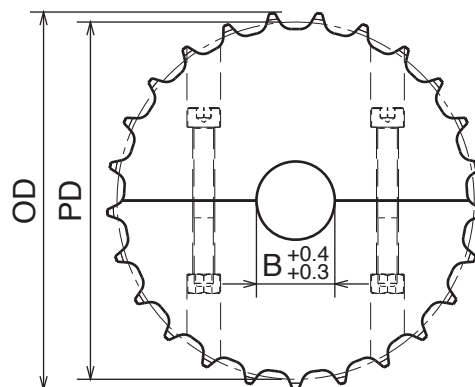

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl




Ruota traino divisa, fresata / Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

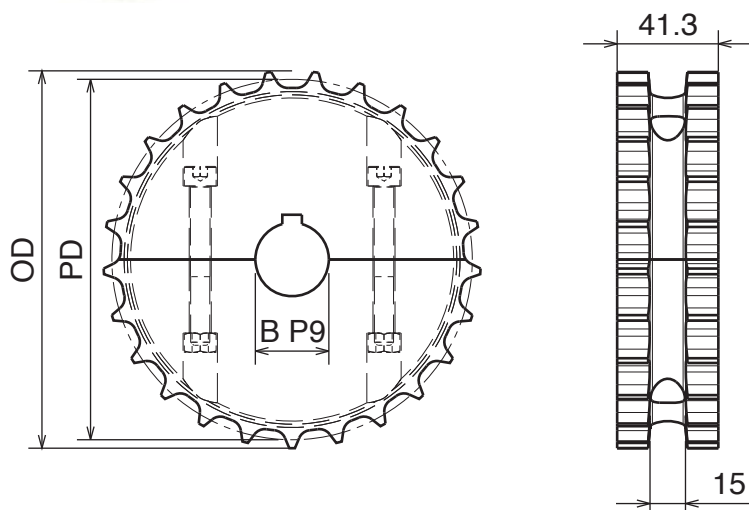

Part	Article-Nr.	Z-	Bore	PD	OD
535	53501	17	25	105,5	103,9
535	53502		30		
535	53503		35		
535	53504		40		
536	53601	19	25	117,3	117,0
536	53602		30		
536	53603		35		
536	53604		40		
537	53701	21	25	129,3	129,0
537	53702		30		
537	53703		35		
537	53704		40		
538	53801	23	25	141,2	142,0
538	53802		30		
538	53803		35		
538	53804		40		
539	53901	25	25	153,2	154,0
539	53902		30		
539	53903		35		
539	53904		40		
540	54001	27	25	165,2	166,8
540	54002		30		
540	54003		35		
540	54004		40		
541	54101	29	25	177,2	178,5
541	54102		30		
541	54103		35		
541	54104		40		



Ruota rinvio divisa, fresata / Split idler sprocket, machined / geteiltes Umlenkrad, gefräst


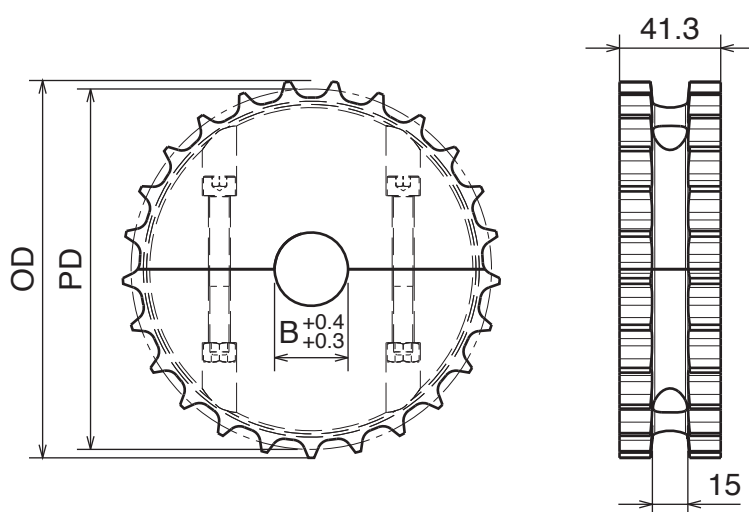


Part	Article-Nr.	Z-	Bore	PD	OD
535	53550	17	18*	105,5	103,9
535	53551		25		
535	53552		30		
535	53553		35		
535	53554		40		
536	53650	19	18*	117,3	117,0
536	53651		25		
536	53652		30		
536	53653		35		
536	53654		40		
537	53750	21	18*	129,3	129,0
537	53751		25		
537	53752		30		
537	53753		35		
537	53754		40		
538	53850	23	18*	141,2	142,0
538	53851		25		
538	53852		30		
538	53853		35		
538	53854		40		
539	53950	25	18*	153,2	154,0
539	53951		25		
539	53952		30		
539	53953		35		
539	53954		40		
540	54050	27	18*	165,2	166,8
540	54051		25		
540	54052		30		
540	54053		35		
540	54054		40		
541	54150	29	18*	177,2	178,5
541	54151		25		
541	54152		30		
541	54153		35		
541	54154		40		

Materiale:	Material:	Materialien:
Poliammide rinforzato	Polyamide reinforced	Verstärktes Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ottone nichelato	Nuts: nickel plated brass	Mutter: Messing vernickelt



Ruota traino divisa, stampata / Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

Part	Article-Nr.	Z-	Bore	PD	OD
542	54201	21	25	129,3	129,0
542	54202		30		
542	54203		35		
542	54204		40		
543	54301	23	25	141,2	142,0
543	54302		30		
543	54303		35		
543	54304		40		
544	54401	25	25	153,2	154,0
544	54402		30		
544	54403		35		
544	54404		40		

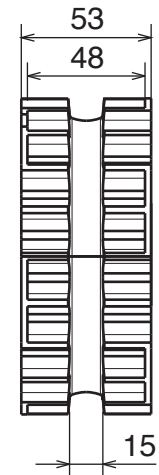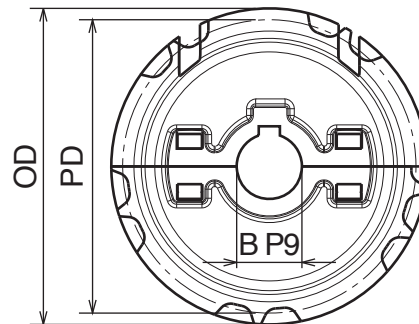

Ruota rinvio divisa, stampata / Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt


Part	Article-Nr.	Z-	Bore	PD	OD
542	54251	21	25	129,3	129,0
542	54252		30		
542	54253		35		
542	54254		40		
543	54351	23	25	141,2	142,0
543	54352		30		
543	54353		35		
543	54354		40		
544	54451	25	25	153,2	154,0
544	54452		30		
544	54453		35		
544	54454		40		

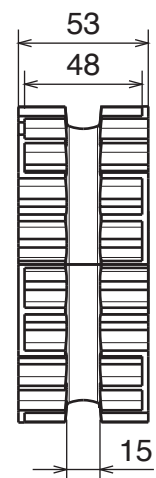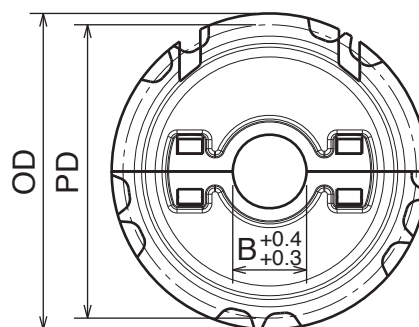

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl




Ruota traino divisa, fresata / Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

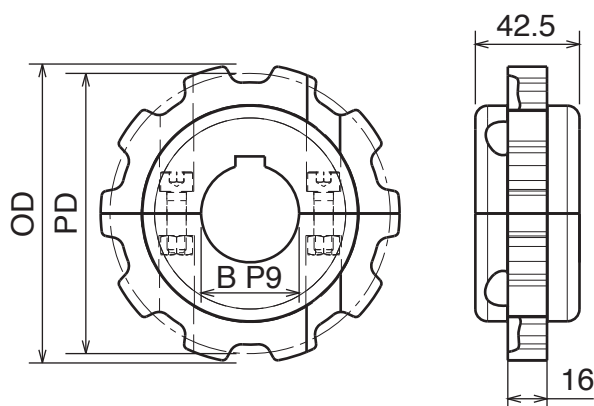

Part	Article-Nr.	Z-	Bore	PD	OD
545	54501	9	25	111,4	110,0
545	54502		30		
545	54503		35		
545	54504		40		
546	54601	10	25	123,3	122,0
546	54602		30		
546	54603		35		
546	54604		40		
547	54701	11	25	135,2	135,0
547	54702		30		
547	54703		35		
547	54704		40		
548	54801	12	25	147,2	147,3
548	54802		30		
548	54803		35		
548	54804		40		



Ruota rinvio divisa, fresata / Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

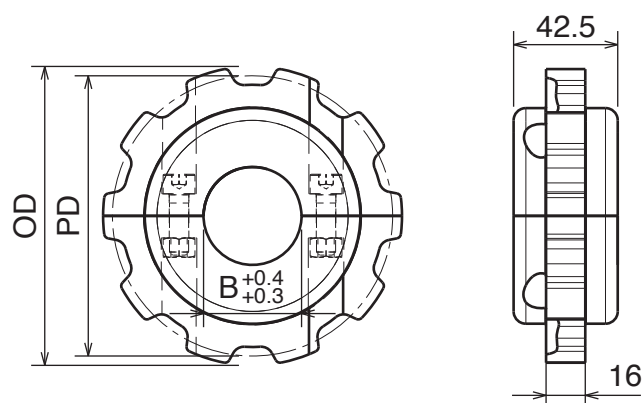


Part	Article-Nr.	Z-	Bore	PD	OD
545	54550	9	18*	111,4	110,0
545	54551		25		
545	54552		30		
545	54553		35		
545	54554		40		
546	54650	10	18*	123,3	122,0
546	54651		25		
546	54652		30		
546	54653		35		
546	54654		40		
547	54750	11	18*	135,2	135,0
547	54751		25		
547	54752		30		
547	54753		35		
547	54754		40		
548	54850	12	18*	147,2	147,3
548	54851		25		
548	54852		30		
548	54853		35		
548	54854		40		

Materiale:	Material:	Materialien:
Poliammide rinforzato	Polyamide reinforced	Verstärktes Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ottone nichelato	Nuts: nickel plated brass	Mutter: Messing vernickelt


Ruota traino divisa, stampata / Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

Part	Article-Nr.	Z-	Bore	PD	OD
549	54901	10	25	123,2	122,0
549	54902		30		
549	54903		35		
549	54904		40		
550	55001	12	25	147,2	147,3
550	55002		30		
550	55003		35		
550	55004		40		

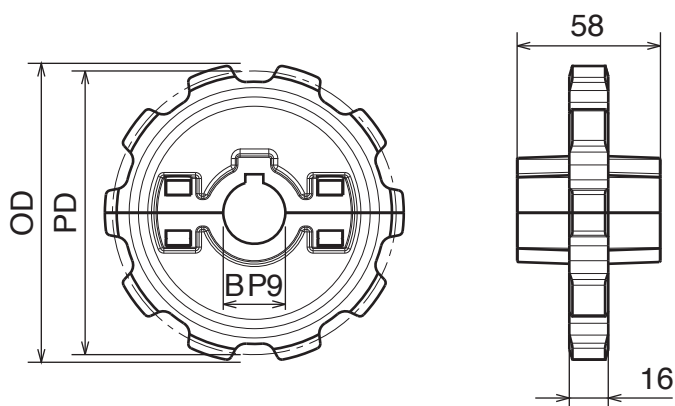

Ruota rinvio divisa, stampata / Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt


Part	Article-Nr.	Z-	Bore	PD	OD
549	54951	10	25	123,2	122,0
549	54952		30		
549	54953		35		
549	54954		40		
550	55051	12	25	147,2	147,3
550	55052		30		
550	55053		35		
550	55054		40		

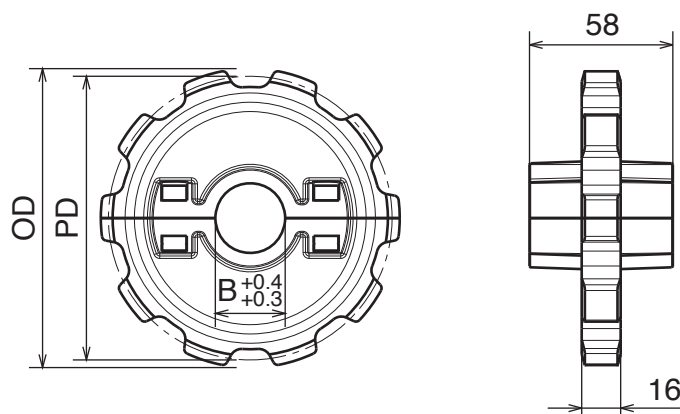

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl




Ruota traino divisa, fresata / Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

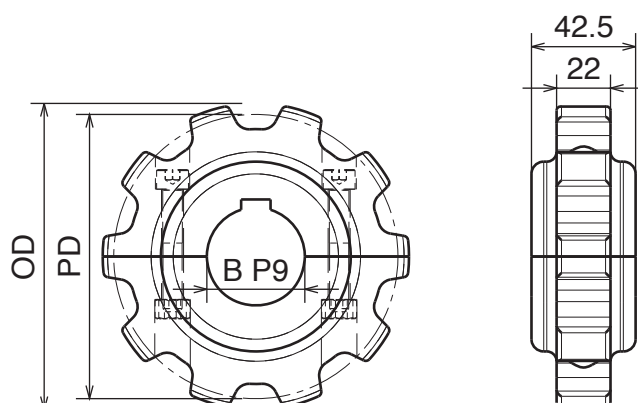

Part	Article-Nr.	Z-	Bore	PD	OD
551	55101	9	25	111,4	112,0
551	55102		30		
551	55103		35		
551	55104		40		
552	55201	10	25	123,2	125,0
552	55202		30		
552	55203		35		
552	55204		40		
553	55301	11	25	135,2	137,0
553	55302		30		
553	55303		35		
553	55304		40		
554	55401	12	25	147,2	149,0
554	55402		30		
554	55403		35		
554	55404		40		



Ruota rinvio divisa, fresata / Split idler sprocket, machined / geteiltes Umlenkrad, gefräst


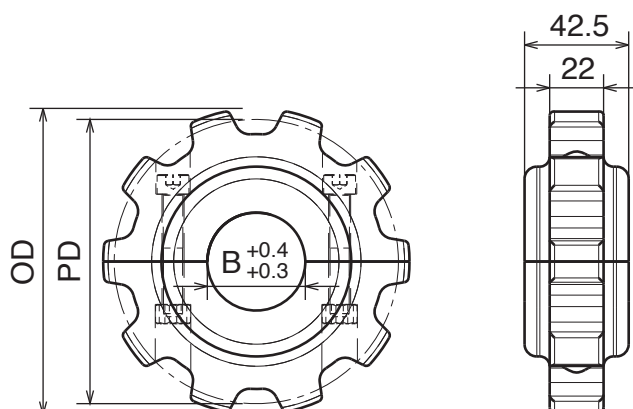


Part	Article-Nr.	Z-	Bore	PD	OD
551	55150	9	18*	111,4	112,0
551	55151		25		
551	55152		30		
551	55153		35		
551	55154		40		
552	55250	10	18*	123,2	125,0
552	55251		25		
552	55252		30		
552	55253		35		
552	55254		40		
553	55350	11	18*	135,2	137,0
553	55351		25		
553	55352		30		
553	55353		35		
553	55354		40		
554	55450	12	18*	147,2	149,0
554	55451		25		
554	55452		30		
554	55453		35		
554	55454		40		

Materiale:	Material:	Materialien:
Poliammide rinforzato	Polyamide reinforced	Verstärktes Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ottone nichelato	Nuts: nickel plated brass	Mutter: messing vernickelt



Ruota traino divisa, stampata / Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

Part	Article-Nr.	Z-	Bore	PD	OD
555	55501	10	25	123,2	125,0
555	55502		30		
555	55503		35		
555	55504		40		
556	55601	12	25	147,2	149,0
556	55602		30		
556	55603		35		
556	55604		40		

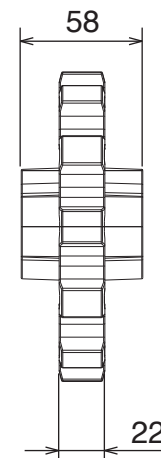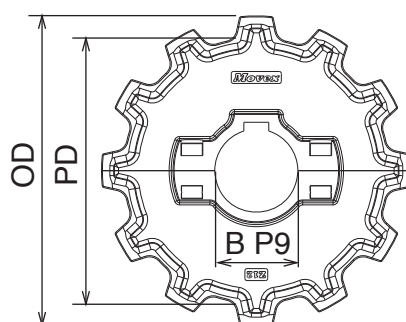

Ruota rinvio divisa, stampata / Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt


Part	Article-Nr.	Z-	Bore	PD	OD
555	55551	10	25	123,2	125,0
555	55552		30		
555	55553		35		
555	55554		40		
556	55651	12	25	147,2	149,0
556	55652		30		
556	55653		35		
556	55654		40		

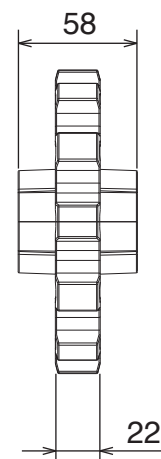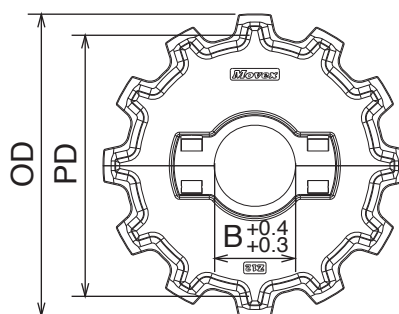

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl




Ruota traino divisa, fresata / Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

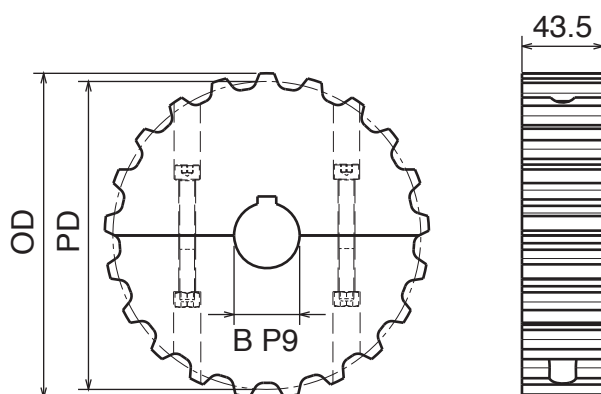

Part	Article-Nr.	Z-	Bore	PD	OD
557	55701	13	25	108,0	106,1
557	55702		30		
557	55703		35		
557	55704		40		
558	55801	15	25	124,0	122,2
558	55802		30		
558	55803		35		
558	55804		40		
559	55901	17	25	138,2	138,2
559	55902		30		
559	55903		35		
559	55904		40		
560	56001	18	25	146,3	146,4
560	56002		30		
560	56003		35		
560	56004		40		
561	56101	19	25	154,3	155,7
561	56102		30		
561	56103		35		
561	56104		40		
562	56201	21	25	170,4	173,0
562	56202		30		
562	56203		35		
562	56204		40		
563	56301	23	25	186,5	190,0
563	56302		30		
563	56303		35		
563	56304		40		
564	56401	25	25	202,7	204,0
564	56402		30		
564	56403		35		
564	56404		40		



Ruota rinvio divisa, fresata / Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

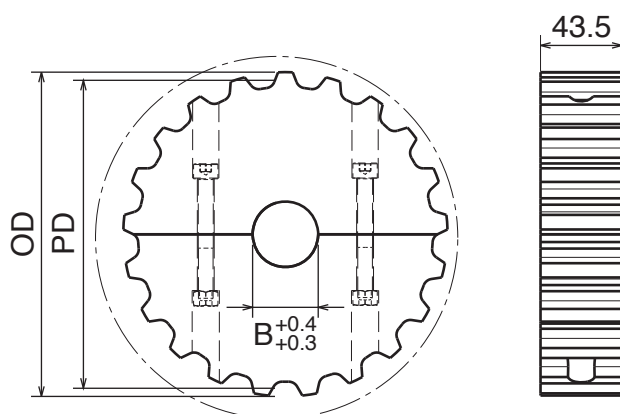


Part	Article-Nr.	Z-	Bore	PD	OD
557	55750	13	18*	108,0	106,1
557	55751		25		
557	55752		30		
557	55753		35		
557	55754		40		
558	55850	15	18*	124,0	122,2
558	55851		25		
558	55852		30		
558	55853		35		
558	55854		40		
559	55950	17	18*	138,2	138,2
559	55951		25		
559	55952		30		
559	55953		35		
559	55954		40		
560	56050	18	18*	146,3	146,4
560	56051		25		
560	56052		30		
560	56053		35		
560	56054		40		
561	56150	19	18*	154,3	155,7
561	56151		25		
561	56152		30		
561	56153		35		
561	56154		40		
562	56250	21	18*	170,4	173,0
562	56251		25		
562	56252		30		
562	56253		35		
562	56254		40		
563	56350	23	18*	186,5	190,0
563	56351		25		
563	56352		30		
563	56353		35		
563	56354		40		
564	56450	25	18*	202,7	204,0
564	56451		25		
564	56452		30		
564	56453		35		
564	56454		40		

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl
Flange: Acciaio inox	Guides: Stainless steel	Bordscheibe: Edelstahl

815

Ruota flangiata divisa, fresata / Split sprocket with guides, machined / Geteiltes Kettenrad mit Bordscheibe, gefräst


Part	Article-Nr.	Z-	Bore	PD	OD	Ø screw
503	50301G	21	25	129,3	129,0	104,0
503	50302G		30			
503	50303G		35			
503	50304G		40			
504	50401G	23	25	141,2	142,0	116,0
504	50402G		30			
504	50403G		35			
504	50404G		40			
505	50501G	25	25	153,2	154,0	128,0
505	50502G		30			
505	50503G		35			
505	50504G		40			

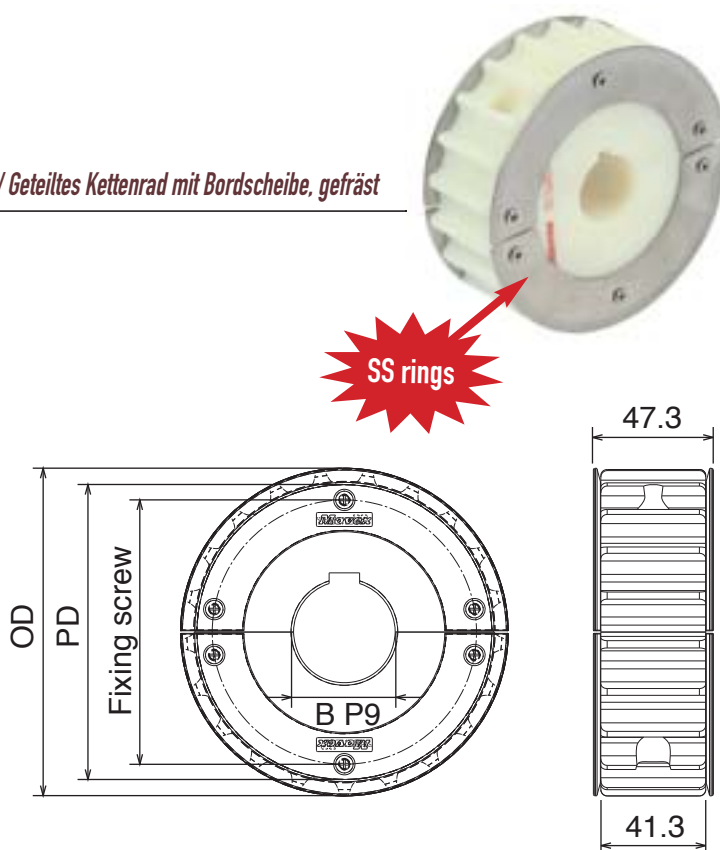

8157


Ruota flangiata divisa, fresata / Split sprocket with guides, machined / Geteiltes Kettenrad mit Bordscheibe, gefräst

Part	Article-Nr.	Z-	Bore	PD	OD	Ø screw
530	53001G	21	25	129,3	129,0	104,0
530	53002G		30			
530	53003G		35			
530	53004G		40			
531	53101G	23	25	141,2	142,0	116,0
531	53102G		30			
531	53103G		35			
531	53104G		40			
532	53201G	25	25	153,2	154,0	128,0
532	53202G		30			
532	53203G		35			
532	53204G		40			

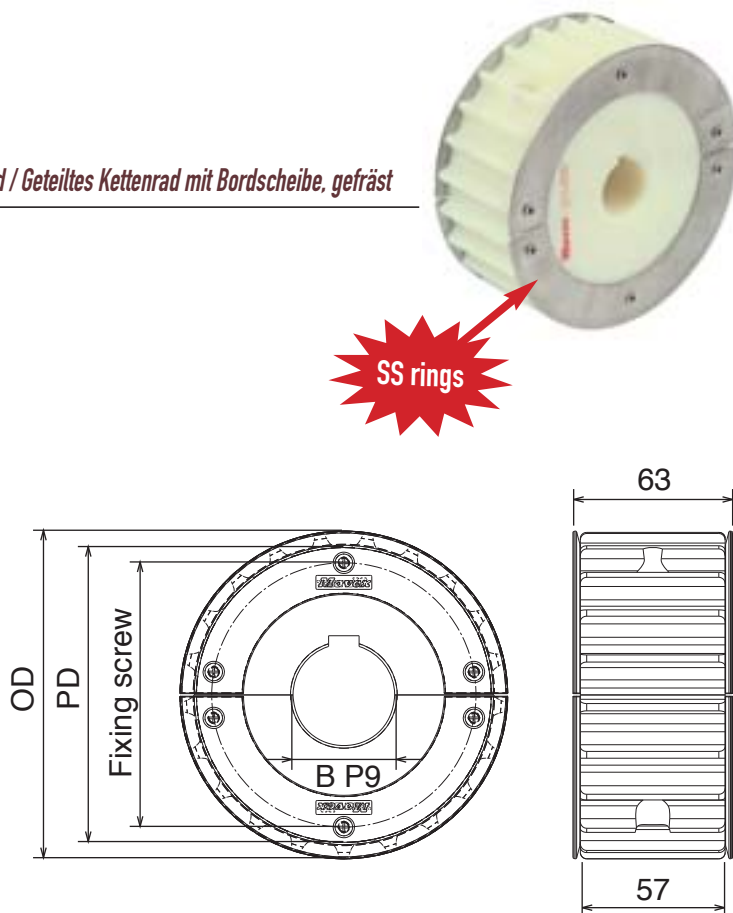



SS rings

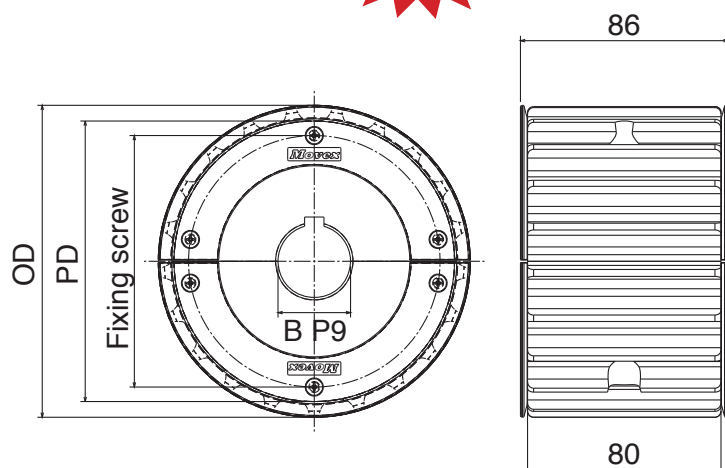

805

Ruota flangiata divisa, fresata / Split sprocket with guides, machined / Geteiltes Kettenrad mit Bordscheibe, gefräst

Part	Article-Nr.	Z-	Bore	PD	OD	Ø screw
523	52301G	21	25	129,3	129,0	104,0
523	52302G		30			
523	52303G		35			
523	52304G		40			
524	52401G	23	25	141,2	142,0	116,0
524	52402G		30			
524	52403G		35			
524	52404G		40			
525	52501G	25	25	153,2	154,0	128,0
525	52502G		30			
525	52503G		35			
525	52504G		40			




CC600

Ruota rinvio divisa, fresata / Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

Part	Article-Nr.	Z-	Bore	PD	OD
565	56550	8	20	172,0	166,0
566	56650	10	20	215,0	205,0
567	56750	12	20	256,0	246,0
568	56850	14	20	297,0	286,0

For adequate quantities these sprockets can be delivered with finished bore.

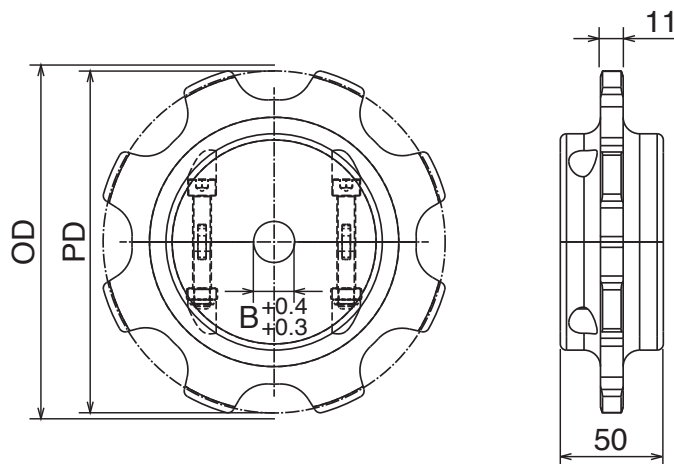

chains idler wheels

Series 815



pag. 46

Series 815



pag. 46

Series 805



pag. 47

Series 821




pag. 47

Series 881




pag. 48



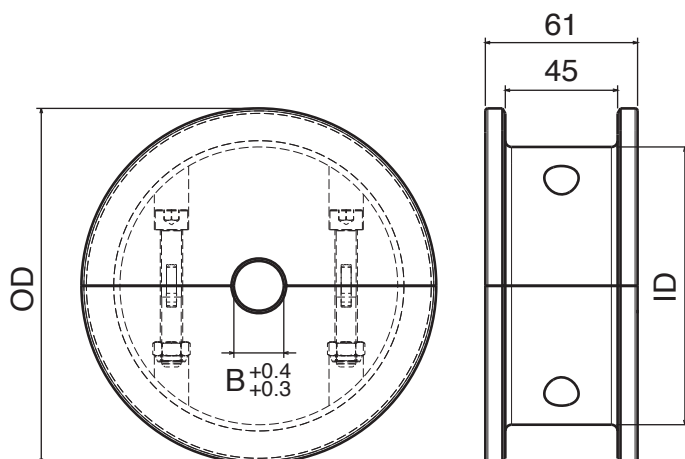

Suitable also for series
881M - 820 - 831 - 828
879/879M - 880/880M

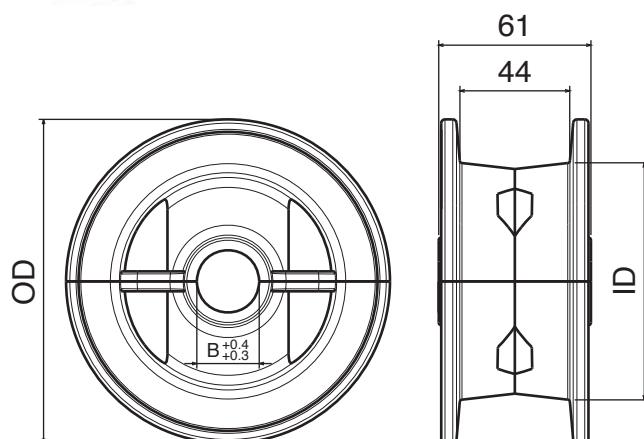

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato per fresate	Nuts: zinc plated steel for machined	Mutter: verzinkter Stahl für gefräste Version
Dadi: ottone nichelato per stampate	Nuts: nickel plated brass for molded	Mutter: Messing vernickelt für gespritzt Version

Ruota rinvio liscia, divisa, fresata / Split idler wheel, machined / geteilte Umlenkrolle, gefräst

Part	Article-Nr.	ecq. Z-	Bore	OD	ID
601	60100	17	20	104,0	75,2
601	60101		25		
601	60102		30		
601	60103		35		
601	60104		40		
602	60200	19	20	117,0	92,2
602	60201		25		
602	60202		30		
602	60203		35		
602	60204		40		
603	60300	21	20	129,8	105,0
603	60301		25		
603	60302		30		
603	60303		35		
603	60304		40		
604	60400	23	20	142,2	111,3
604	60401		25		
604	60402		30		
604	60403		35		
604	60404		40		
605	60500	25	20	154,7	124,7
605	60501		25		
605	60502		30		
605	60503		35		
605	60504		40		
606	60600	27	20	167,2	135,0
606	60601		25		
606	60602		30		
606	60603		35		
606	60604		40		
607	60700	29	20	179,3	140,0
607	60701		25		
607	60702		30		
607	60703		35		
607	60704		40		

Ruota rinvio liscia, divisa, stampata / Split idler wheel, molded / geteilte Umlenkrolle, gespritzt

Part	Article-Nr.	ecq. Z-	Bore	OD	ID
608	60801	21	25	129,8	94,8
608	60802		30		
608	60803		35		
608	60804		40		
609	60901	23	25	142,2	99,3
609	60902		30		
609	60903		35		
609	60904		40		
610	61001	25	25	154,7	102,0
610	61002		30		
610	61003		35		
610	61004		40		



Suitable also for series
881M - 820 - 831 - 828
879/879M - 880/880M

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl

805

Ruota rinvio liscia, divisa, fresata / Split idler wheel, machined / geteilte Umlenkrolle, gefräst



Part	Article-Nr.	ecq.	Z-	Bore	OD	ID
611	61100	17	20	104,0	75,2	
611	61101		25			
611	61102		30			
611	61103		35			
611	61104		40			
612	61200	19	20	117,0	92,2	
612	61201		25			
612	61202		30			
612	61203		35			
612	61204		40			
613	61300	21	20	129,8	105,0	
613	61301		25			
613	61302		30			
613	61303		35			
613	61304		40			
614	61400	23	20	142,2	111,3	
614	61401		25			
614	61402		30			
614	61403		35			
614	61404		40			
615	61500	25	20	154,7	124,7	
615	61501		25			
615	61502		30			
615	61503		35			
615	61504		40			
616	61600	27	20	167,2	135,0	
616	61601		25			
616	61602		30			
616	61603		35			
616	61604		40			
617	61700	29	20	179,3	140,0	
617	61701		25			
617	61702		30			
617	61703		35			
617	61704		40			

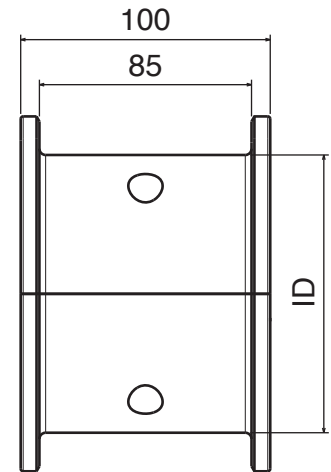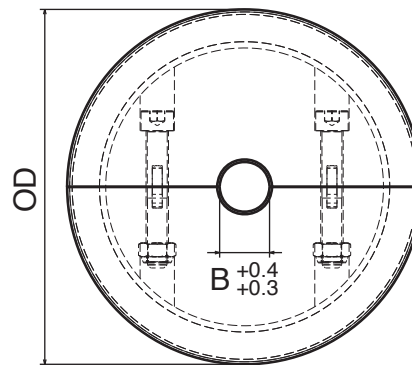

821


Ruota rinvio liscia, divisa, fresata / Split idler wheel, machined / geteilte Umlenkrolle, gefräst

Part	Article-Nr.	ecq.	Z-	Bore	OD	ID
625	62500	19	20	117,0	92,2	
625	62501		25			
625	62502		30			
625	62503		35			
625	62504		40			
626	62600	21	20	129,8	105,0	
626	62601		25			
626	62602		30			
626	62603		35			
626	62604		40			
627	62700	23	20	142,2	111,3	
627	62701		25			
627	62702		30			
627	62703		35			
627	62704		40			
628	62800	25	20	154,7	124,7	
628	62801		25			
628	62802		30			
628	62803		35			
628	62804		40			

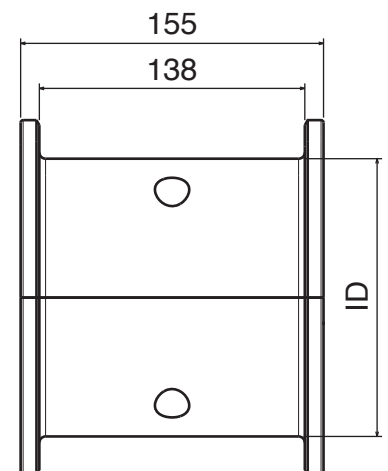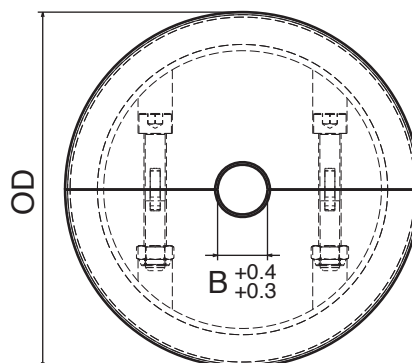



Ruota rinvio liscia, divisa, fresata / Split idler wheel, machined / geteilte Umlenkrolle, gefräst

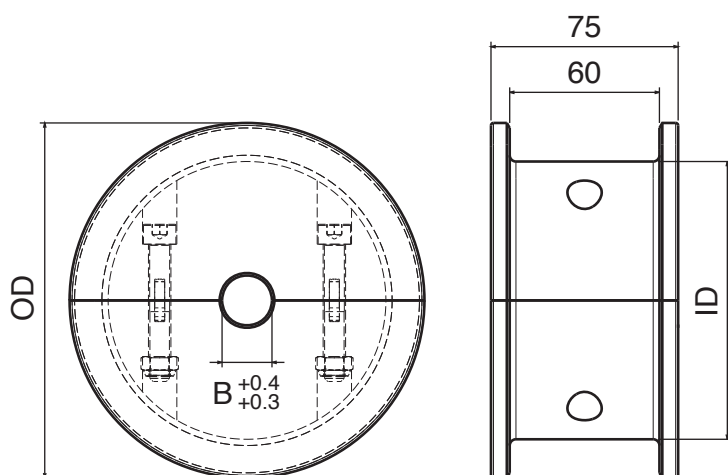

Suitable also for series
882M - 8257

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl

Part	Article-Nr.	ecq. Z-	Bore	OD	ID
618	61800	17	20	104,0	75,2
618	61801		25		
618	61802		30		
618	61803		35		
618	61804		40		
619	61900	19	20	117,0	92,2
619	61901		25		
619	61902		30		
619	61903		35		
619	61904		40		
620	62000	21	20	129,8	105,0
620	62001		25		
620	62002		30		
620	62003		35		
620	62004		40		
621	62100	23	20	142,2	111,3
621	62101		25		
621	62102		30		
621	62103		35		
621	62104		40		
622	62200	25	20	154,7	124,7
622	62201		25		
622	62202		30		
622	62203		35		
622	62204		40		
623	62300	27	20	167,2	135,0
623	62301		25		
623	62302		30		
623	62303		35		
623	62304		40		
624	62400	29	20	179,3	140,0
624	62401		25		
624	62402		30		
624	62403		35		
624	62404		40		

Curve

Tipologia di curve 1) Magnetiche - 2) Tab - 3) Bevel

Caratteristiche delle curve magnetiche La curva magnetica rappresenta il sistema più efficace ed affidabile per trasportatori con catene a cerniera. Le nostre curve magnetiche sono prodotte da lastre di UHMW-PE di elevata qualità con magneti permanenti alloggiati all'interno della lastra. I magneti mantengono la catena nella via tracciata in curva garantendo la planarità della superficie di trasporto della catena, migliorando la stabilità del prodotto trasportato.

Vantaggi - Igiene: La catena sulla via di scorrimento in curva può essere facilmente sollevata per consentire più facilmente pulizia e manutenzione.

Intercambiabilità: Catene in plastica e in acciaio possono essere utilizzate sulle nostre curve semplificando progetto/realizzazione del trasportatore e consentendo di ridurre scorte di ricambi a magazzino. **Materiali:** La parte superiore delle nostre curve è ottenuta da UHMW-PE di elevata qualità che consente una più lunga durata di catene e delle stesse curve. **Attrito:** I magneti vengono accuratamente selezionati e posizionati per garantire il campo magnetico più idoneo al mantenimento della catena nella sede. Un campo magnetico troppo elevato aumenta l'attrito e riduce la durata di curva e catena.

Corner Tracks

Types of Corner Track 1) Magnetic - 2) Tab - 3) Bevel

Characteristics of Magnetic Corner Tracks The magnetic corner track is the most effective and reliable system for the table top conveyor design. Our magnetic corner tracks are made of high quality UHMW - PE with permanent magnets embedded in the curve. The magnets hold the chain on the corner track and this provides a flat carrying surface for the chain; thus, improving product stability and support for the conveyor.

Benefits - Hygiene: Chains on the magnetic corner tracks can be easily lifted such that it is easier for cleaning and maintenance. **Inter-changeable:** Plastic and S.S. chains can be used on the curve thus reducing inventory and simpler conveyor design. **Materials:** The upper track of the corner tracks uses high quality UHMW-PE which gives a longer wear life for both the chain and the curve. **Frictional force:** Magnets are carefully selected and positioned to provide the correct magnetic field which is just sufficient to keep the chain down. Too high a magnetic force will increase the frictional force and reduces wear life of both chains and curve.

Kurvenführungen

Typen 1) Magnet - 2) TAB - 3) Schwalbenschanz

Charakteristik der Magnet-Kurvenführung Die Magnet-Kurvenführung ist das effektivste und bewährteste System für Transporteure mit Scharnierbandketten. Unsere Magnetkurven sind aus hochwertigem UHMW-PE mit permanenten in die Führung eingebetteten Magneten ausgeführt. Die Magnete halten die Scharnierbandkette in der Führung und dies resultiert in einem ruhigen Lauf der Kette, damit wird eine bessere Produktstabilität erreicht.

Vorteile - Hygiene: zur Reinigung können die Scharnierband-Ketten einfach, ohne großen Aufwand, aus der Führung herausgenommen werden. Dies erspart Zeit und verkürzt die Standzeiten. **Versatilität:** Kunststoff- als auch Edelstahl-Scharnierband-Ketten können mit dieser Kurvenführung verwendet werden, dies vereinfacht die Konstruktion des Transporteurs und reduziert die Lagerhaltung. **Materialien:** Das Oberteil der Magnetkurve ist aus hochwertigem UHMW-PE gefertigt und bietet eine längere Standzeit nicht nur für die Führung sondern auch für die Scharnierbandkette. **Reibung:** Die Magnete sind so angeordnet und ausgewählt um ein homogenes und konstantes Magnetfeld zu erzeugen um ein ruhiges und rückenfreies Laufen der Kette zu gewährleisten.



Curve magnetiche / Magnetic curves / Magnet Kurven

Series 880-881 Rm500



pag. 52

Series 880-881 Rm500



pag. 53

Series 880-881 Rm500



pag. 54

Series 880-881 Rm500



pag. 55

Series 880-881 Rm750



pag. 56

Series 880-881 Rm750



pag. 57

Series 880-881 Rm750



pag. 58

Series 880-881 Rm860



pag. 59

Series 880-881 K450 - Rm500



pag. 60

Series 880-881 K450 - Rm610



pag. 61

Series 880-881 K750 - Rm610



pag. 62

Series 880-881 K750 - Rm860/750/1000



pag. 63

Series 882-8857 K750 - Rm610



pag. 64

Series 882-8857 K750 - Rm750



pag. 65

Series 882-8857 K750 - Rm860



pag. 66

Series 882-8857 K750 - Rm1000



pag. 67

Series 882-8857 K1000 - Rm860



pag. 68

Series 882-8857 K1200 - Rm860



pag. 69

Series LBP 882 K750 - Rm860



pag. 70

Series LBP 882 K1000 - Rm860



pag. 71

Series LBP 882 K1200 - Rm860



pag. 72

Series 250M-260M



pag. 73

Series 251M



pag. 74

Curve Tab / Tab curves / Tab Kurven

Series 880-881 K325 - K450 - K750



pag. 75


Series 882 K750 - K1000 - K1200





pag. 76

tab & magnetic corner tracks

Curva Larghezza Base = 100 mm; Passo = 85 mm / Curve Basic Width = 100 mm; Pitch = 85 mm / Kurve Basisbreite = 100 mm; Teilung = 85 mm

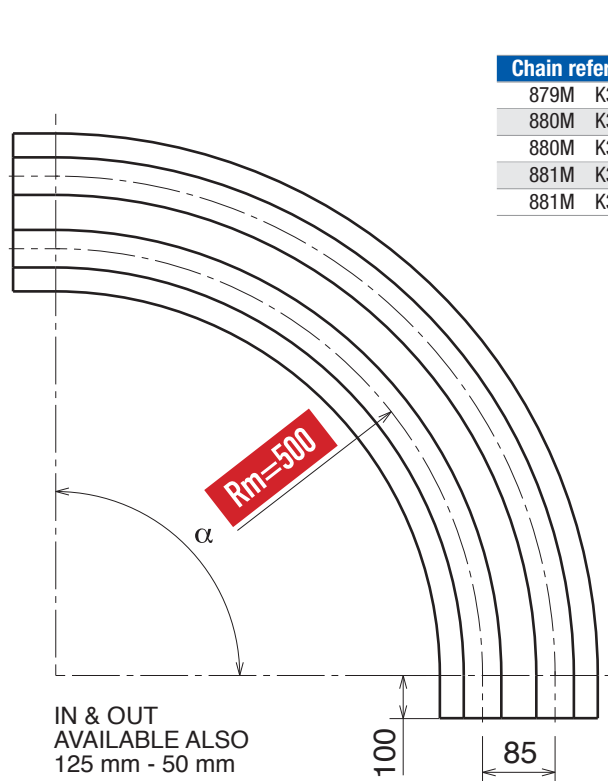

Chain reference	
879M	K325
880M	K325
880M	K330
881M	K325
881M	K330

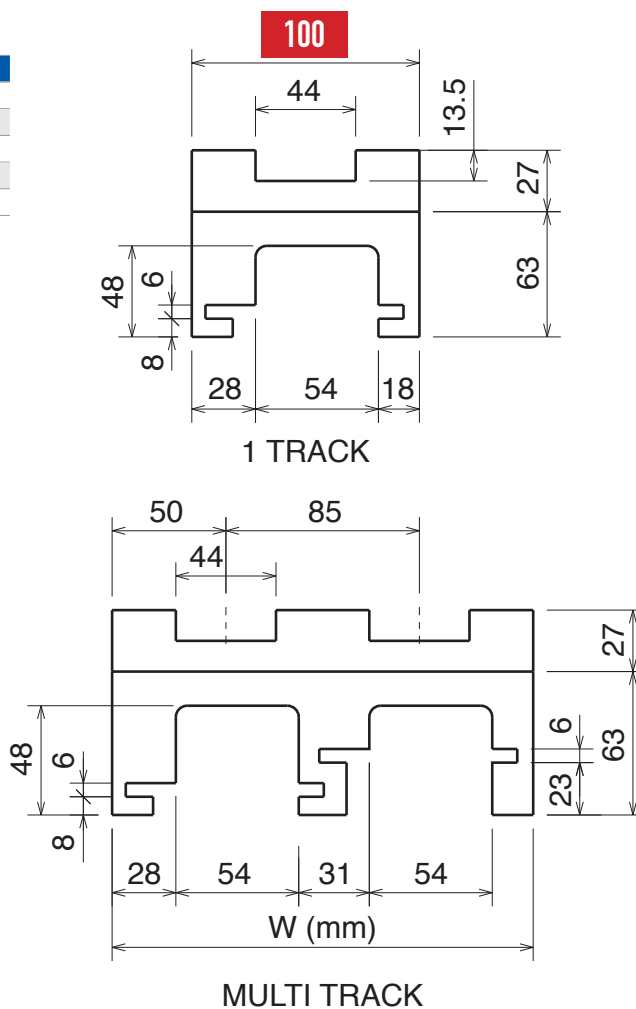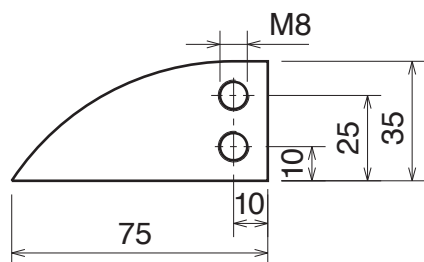

Magnetic System



Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W
701	70111114	70111214	70111314	70111414	70111514	70111614	1	100
701	70111124	70111224	70111324	70111424	70111524	70111624	2	185
701	70111134	70111234	70111334	70111434	70111534	70111634	3	270
701	70111144	70111244	70111344	70111444	70111544	70111644	4	355
701	70111154	70111254	70111354	70111454	70111554	70111654	5	440
701	70111164	70111264	70111364	70111464	70111564	70111664	6	525
701	70111174	70111274	70111374	70111474	70111574	70111674	7	610
701	70111184	70111284	70111384	70111484	70111584	70111684	8	695

Upper part available, on request,
also in 
and for abrasive applications.



standard codes
on table





add "B" for






add "C"
for abrasive
applications

Curva Larghezza Base = 100 mm; Passo = 85 mm / Curve Basic Width = 100 mm; Pitch = 85 mm / Kurve Basisbreite = 100 mm; Teilung = 85 mm

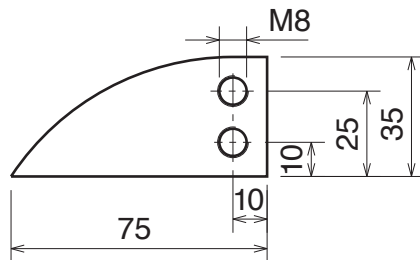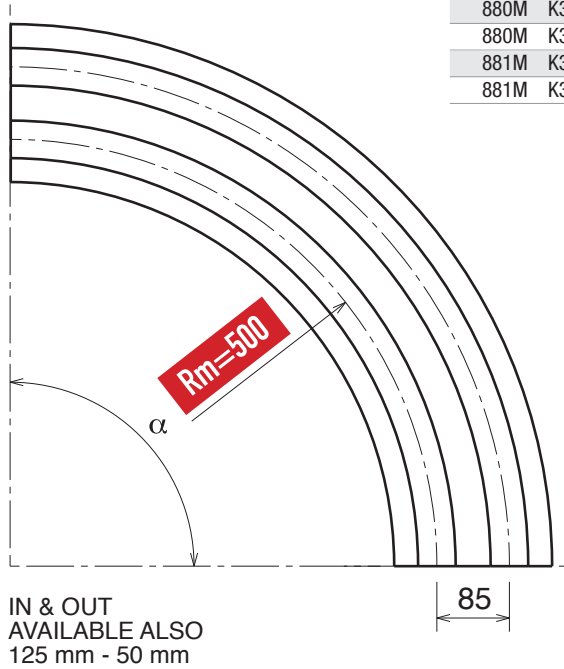

Chain reference	
879M	K325
880M	K325
880M	K330
881M	K325
881M	K330

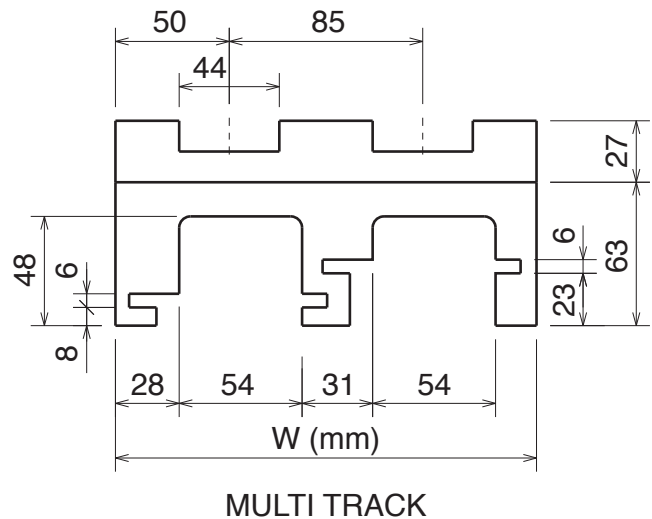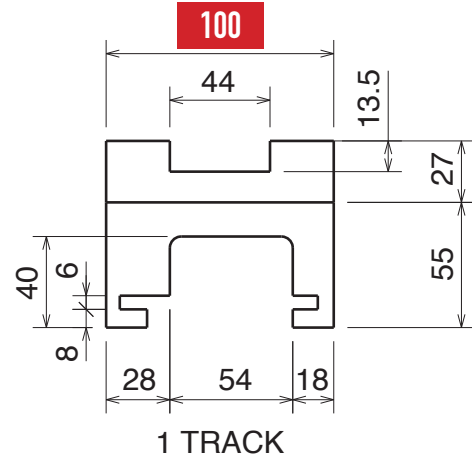

Magnetic System





Part	$\alpha 15^\circ$	$\alpha 30^\circ$	$\alpha 45^\circ$	$\alpha 60^\circ$	$\alpha 75^\circ$	$\alpha 90^\circ$	Tracks	W
701	70111110	70111210	70111310	70111410	70111510	70111610	1	100
701	70111120	70111220	70111320	70111420	70111520	70111620	2	185
701	70111130	70111230	70111330	70111430	70111530	70111630	3	270
701	70111140	70111240	70111340	70111440	70111540	70111640	4	355
701	70111150	70111250	70111350	70111450	70111550	70111650	5	440
701	70111160	70111260	70111360	70111460	70111560	70111660	6	525
701	70111170	70111270	70111370	70111470	70111570	70111670	7	610
701	70111180	70111280	70111380	70111480	70111580	70111680	8	695

Upper part available, on request,
also in **BluLub** 
and for abrasive applications.



Curva Larghezza Base = 110 mm; Passo = 85 mm / Curve Basic Width = 110 mm; Pitch = 85 mm / Kurve Basisbreite = 110 mm; Teilung = 85 mm

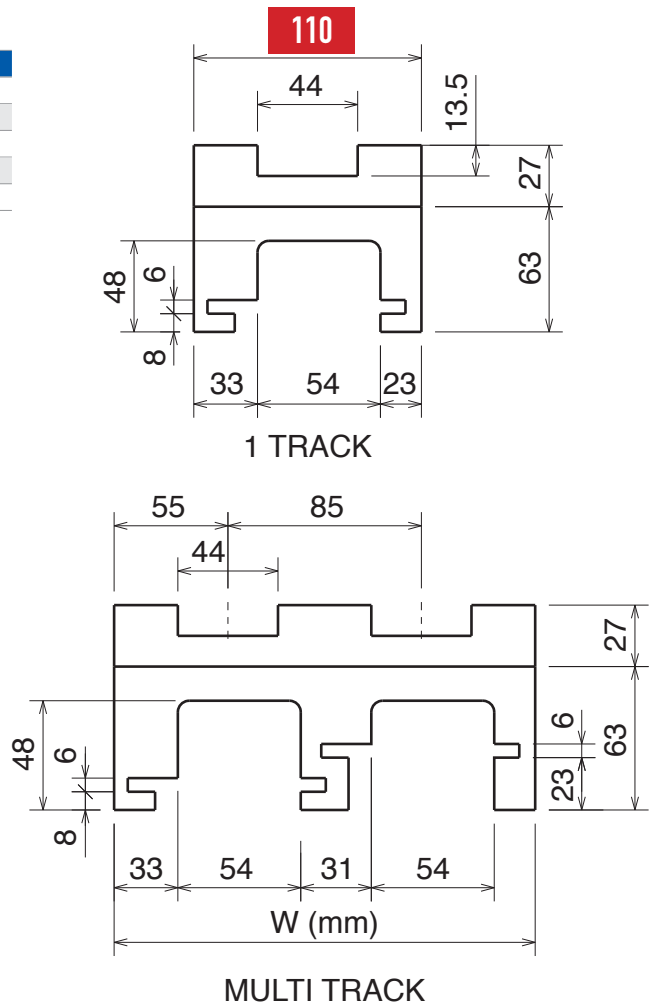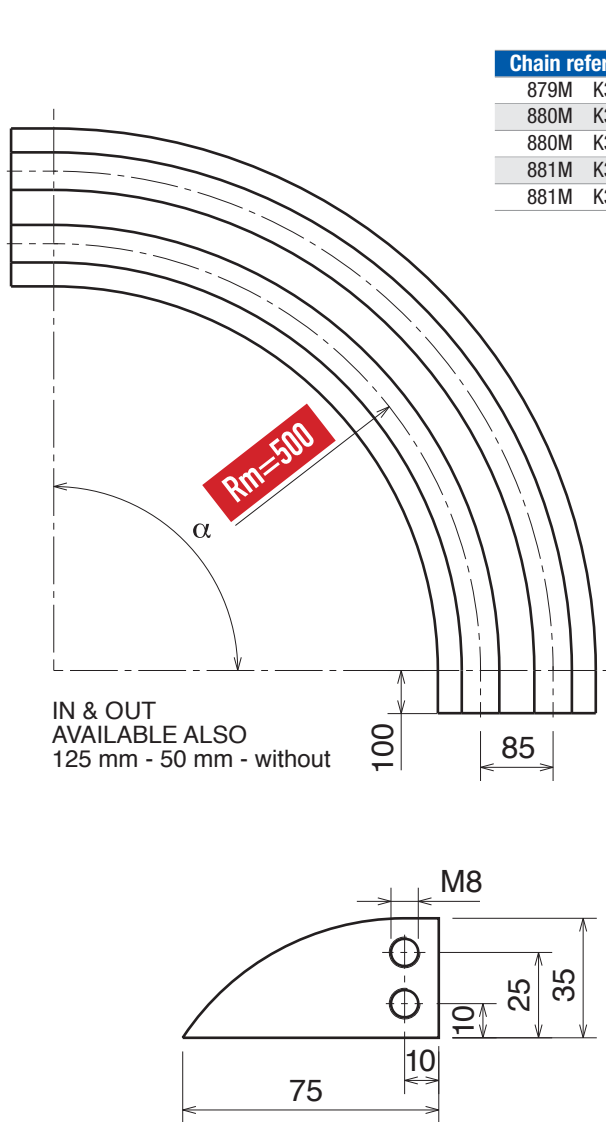

MMM Magnetic System



Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W
711	71111114	71111214	71111314	71111414	71111514	71111614	1	110
711	71111124	71111224	71111324	71111424	71111524	71111624	2	195
711	71111134	71111234	71111334	71111434	71111534	71111634	3	280
711	71111144	71111244	71111344	71111444	71111544	71111644	4	365
711	71111154	71111254	71111354	71111454	71111554	71111654	5	450
711	71111164	71111264	71111364	71111464	71111564	71111664	6	535
711	71111174	71111274	71111374	71111474	71111574	71111674	7	620
711	71111184	71111284	71111384	71111484	71111584	71111684	8	705

Upper part available, on request,
also in **BluLub** 
and for abrasive applications.



standard codes
on table




add "B" for




*add "C"
for abrasive
applications*

Curva Larghezza Base = 111 mm; Passo = 85 mm / Curve Basic Width = 111 mm; Pitch = 85 mm / Kurve Basisbreite = 111 mm; Teilung = 85 mm

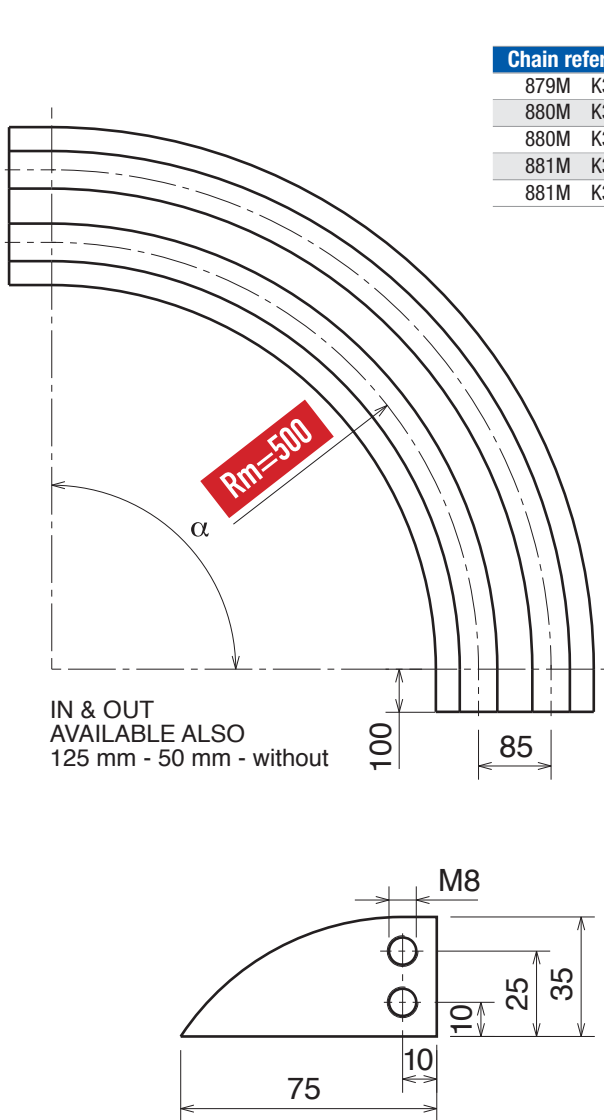

Chain reference	
879M	K325
880M	K325
880M	K330
881M	K325
881M	K330

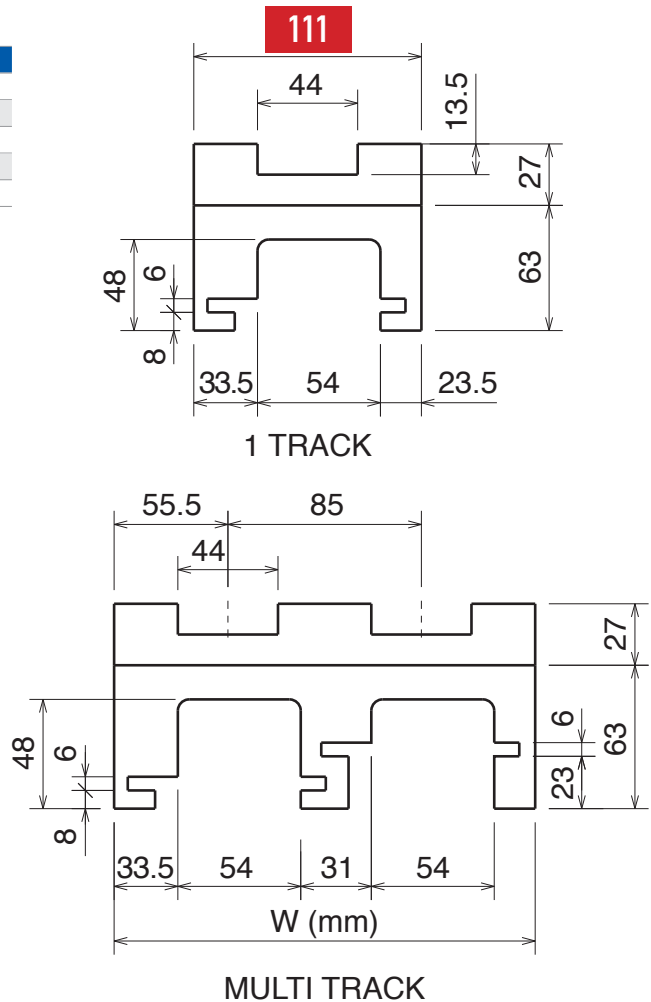

Magnetic System



Part	$\alpha 15^\circ$	$\alpha 30^\circ$	$\alpha 45^\circ$	$\alpha 60^\circ$	$\alpha 75^\circ$	$\alpha 90^\circ$	Tracks	W
712	71211114	71211214	71211314	71211414	71211514	71211614	1	111
712	71211124	71211224	71211324	71211424	71211524	71211624	2	196
712	71211134	71211234	71211334	71211434	71211534	71211634	3	281
712	71211144	71211244	71211344	71211444	71211544	71211644	4	366
712	71211154	71211254	71211354	71211454	71211554	71211654	5	451
712	71211164	71211264	71211364	71211464	71211564	71211664	6	536
712	71211174	71211274	71211374	71211474	71211574	71211674	7	621
712	71211184	71211284	71211384	71211484	71211584	71211684	8	706

Upper part available, on request,
also in **BluLab** 
and for abrasive applications.



standard codes
on table





add "B" for
BluLab 



add "C"
for abrasive
applications

Curva Larghezza Base = 100 mm; Passo = 85 mm / Curve Basic Width = 100 mm; Pitch = 85 mm / Kurve Basisbreite = 100 mm; Teilung = 85 mm

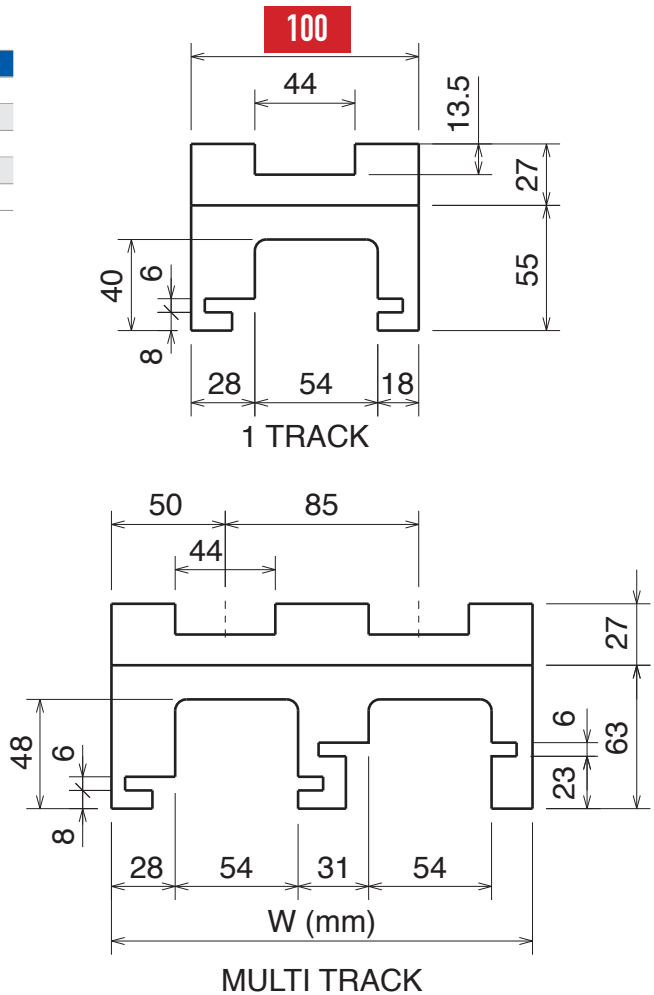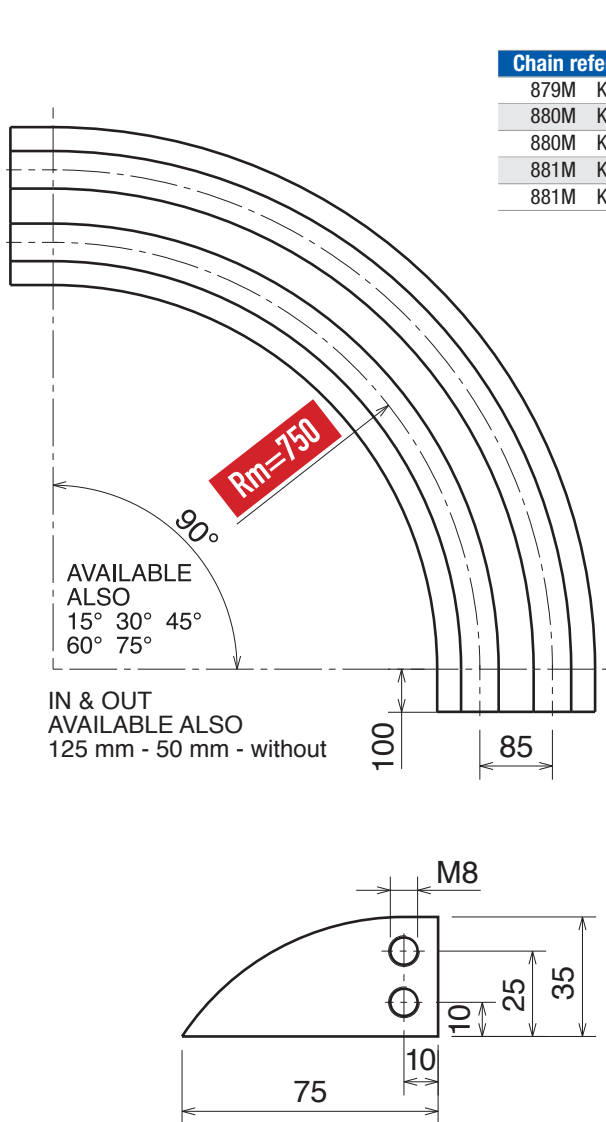

Magnetic System





Upper part available, on request,
also in 
and for abrasive applications.



Part	Article-Nr.	Tracks	W
702	70216614	1	100
702	70216624	2	185
702	70216634	3	270
702	70216644	4	355
702	70216654	5	440
702	70216664	6	525
702	70216674	7	610
702	70216684	8	695

Curva Larghezza Base = 111 mm; Passo = 85 mm / Curve Basic Width = 111 mm; Pitch = 85 mm / Kurve Basisbreite = 111 mm; Teilung = 85 mm

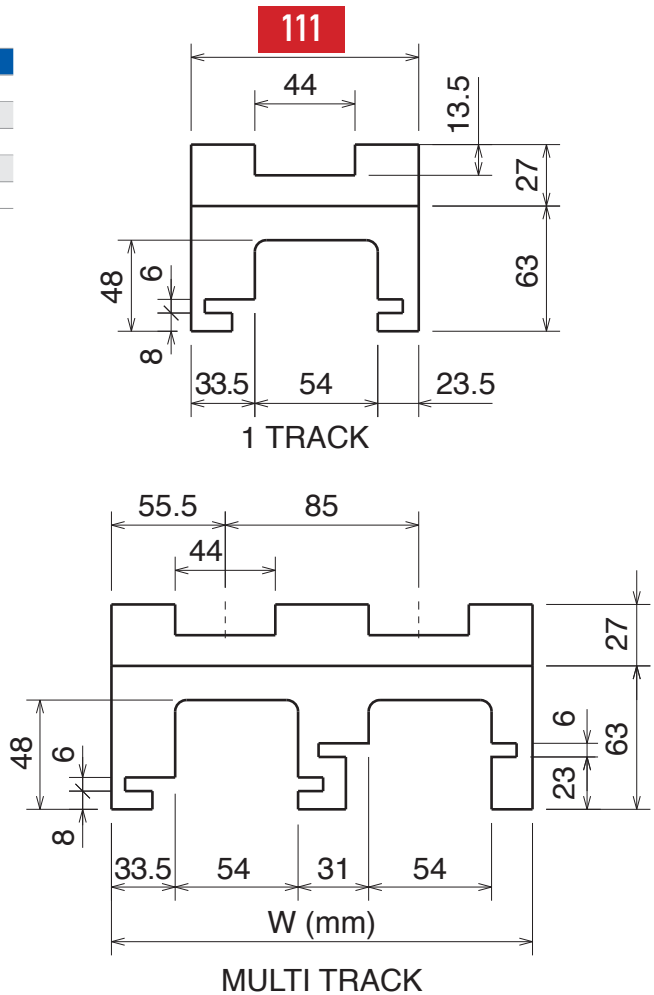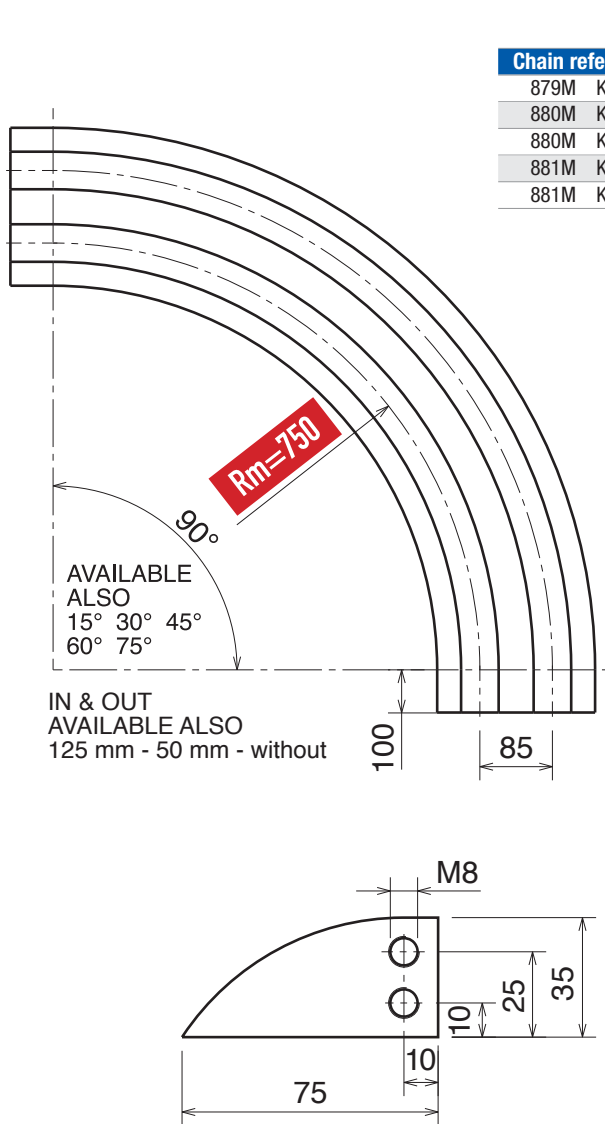

Magnetic System



Part	Article-Nr.	Tracks	W
713	71316614	1	111
713	71316624	2	196
713	71316634	3	281
713	71316644	4	366
713	71316654	5	451
713	71316664	6	536
713	71316674	7	621
713	71316684	8	706



Upper part available, on request,
also in **BluLub** 
and for abrasive applications.



Curva Larghezza Base = 110 mm; Passo = 90 mm / Curve Basic Width = 110 mm; Pitch = 90 mm / Kurve Basisbreite = 110 mm; Teilung = 90 mm

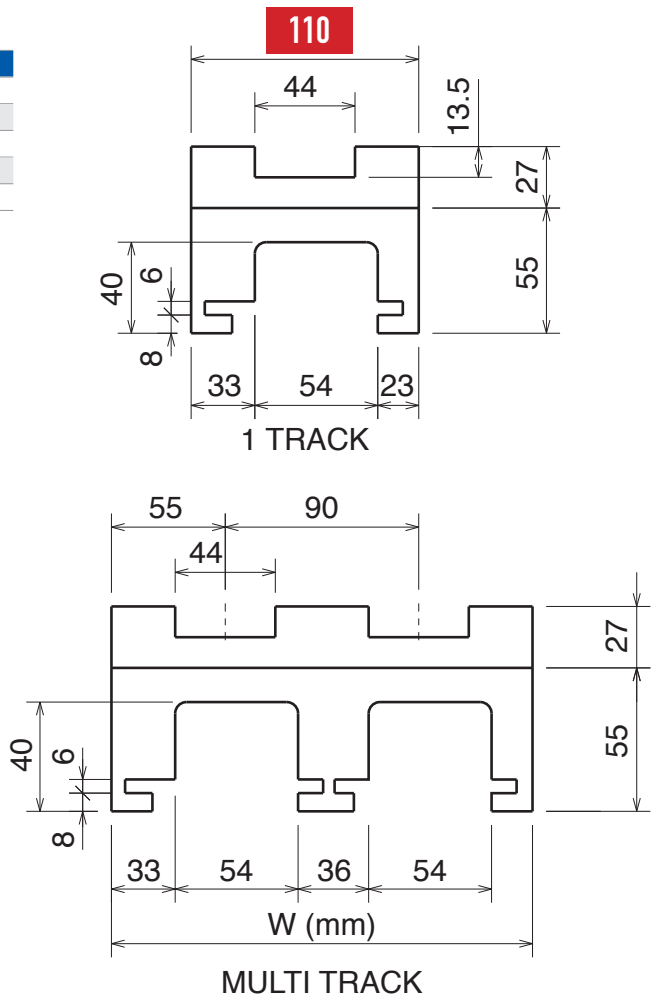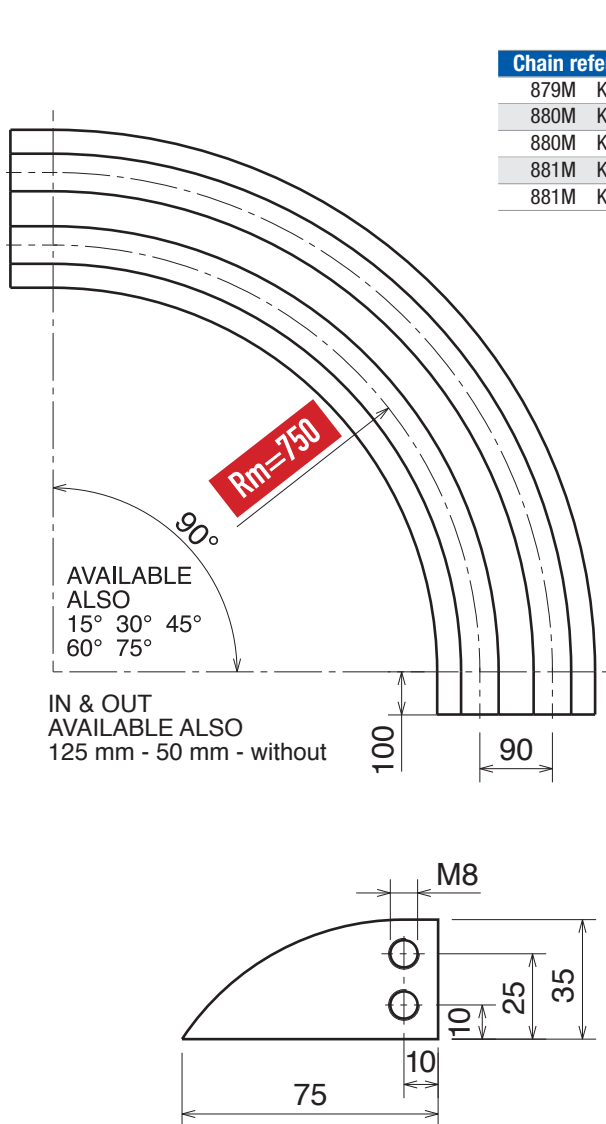

Magnetic System






Upper part available, on request,
also in 
and for abrasive applications.



Part	Article-Nr.	Tracks	W
714	71416614	1	110
714	71416624	2	200
714	71416634	3	290
714	71416644	4	380
714	71416654	5	470
714	71416664	6	560
714	71416674	7	650
714	71416684	8	740

Curva Larghezza Base = 100 mm; Passo = 85 mm / Curve Basic Width = 100 mm; Pitch = 85 mm / Kurve Basisbreite = 100 mm; Teilung = 85 mm

Chain reference	
879M	K325
880M	K325
880M	K330
881M	K325
881M	K330

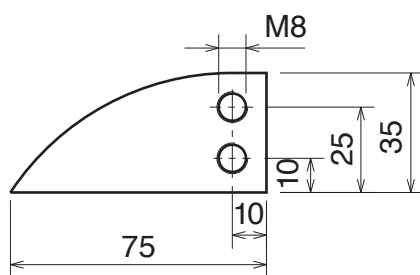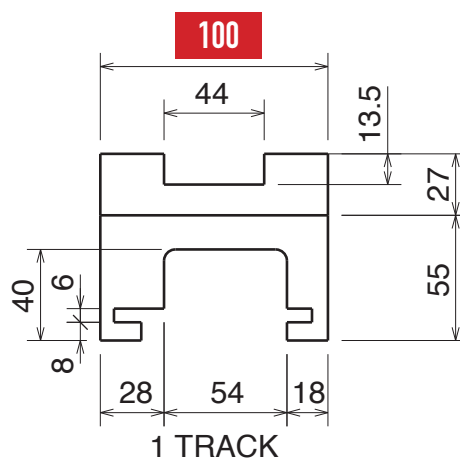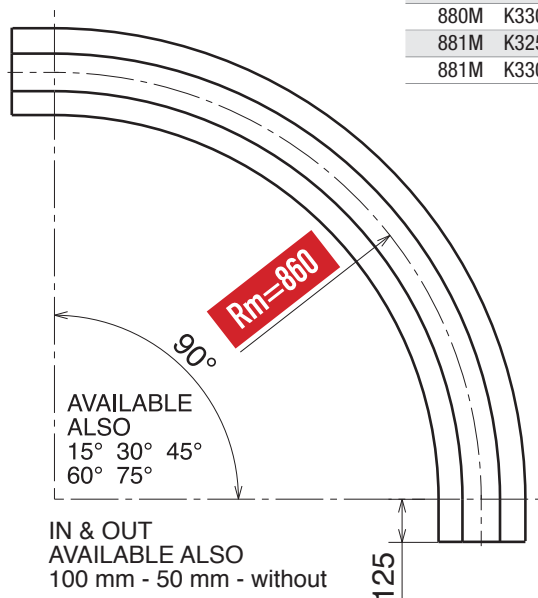

MMM Magnetic System


Part	Article-Nr.	Tracks	W
703	70318615	1	100



Upper part available, on request,
also in **BluLub** 
More Enhanced Performance WITH PD
and for abrasive applications.




Curva Larghezza Base = 129 mm; Passo = 120 mm / Curve Basic Width = 129 mm; Pitch = 120 mm / Kurve Basisbreite = 129 mm; Teilung = 120 mm

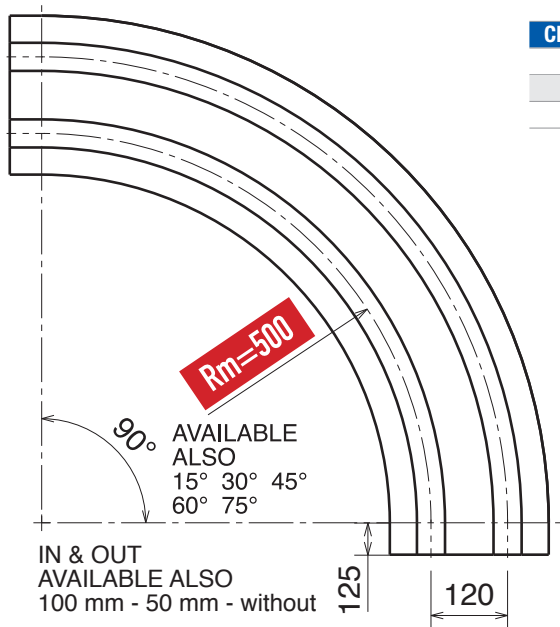


Chain reference


879M	K450
880M	K450
881M	K450

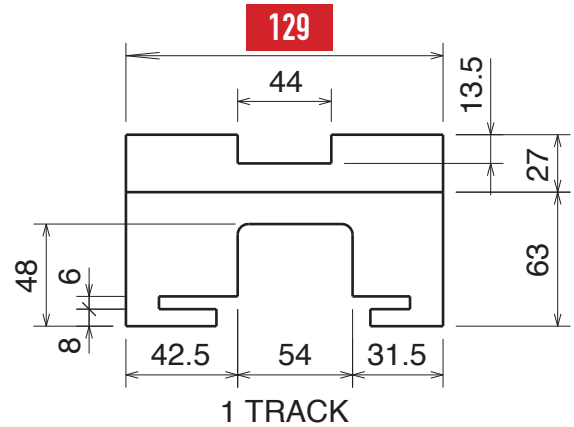

1 TRACK

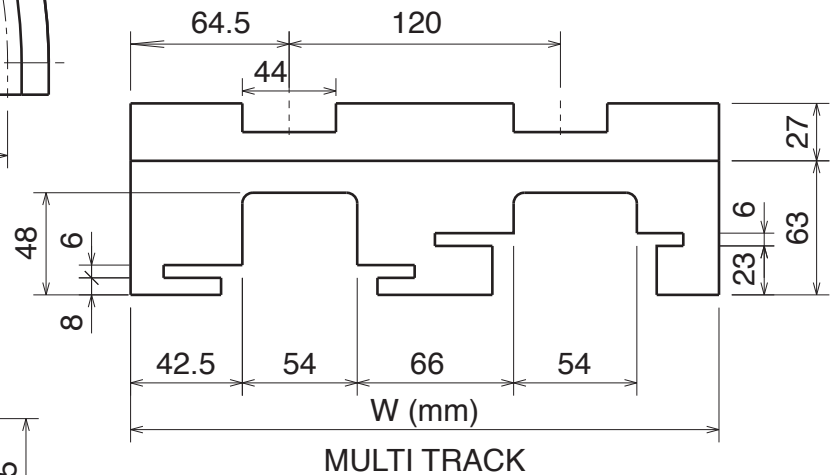

MULTI TRACK

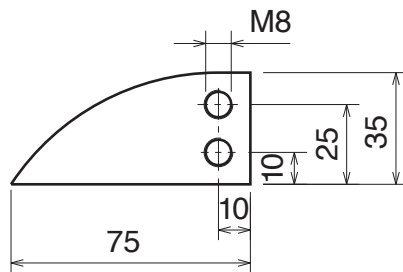

Magnetic System

Part	Article-Nr.	Tracks	W
715	71511615	1	129
715	71511625	2	249
715	71511635	3	369
715	71511645	4	489
715	71511655	5	609



Upper part available, on request,
also in 
and for abrasive applications.




standard codes
on table

add "B" for


add "C"
for abrasive
applications

Curva Larghezza Base = 129 mm; Passo = 120 mm / Curve Basic Width = 129 mm; Pitch = 120 mm / Kurve Basisbreite = 129 mm; Teilung = 120 mm

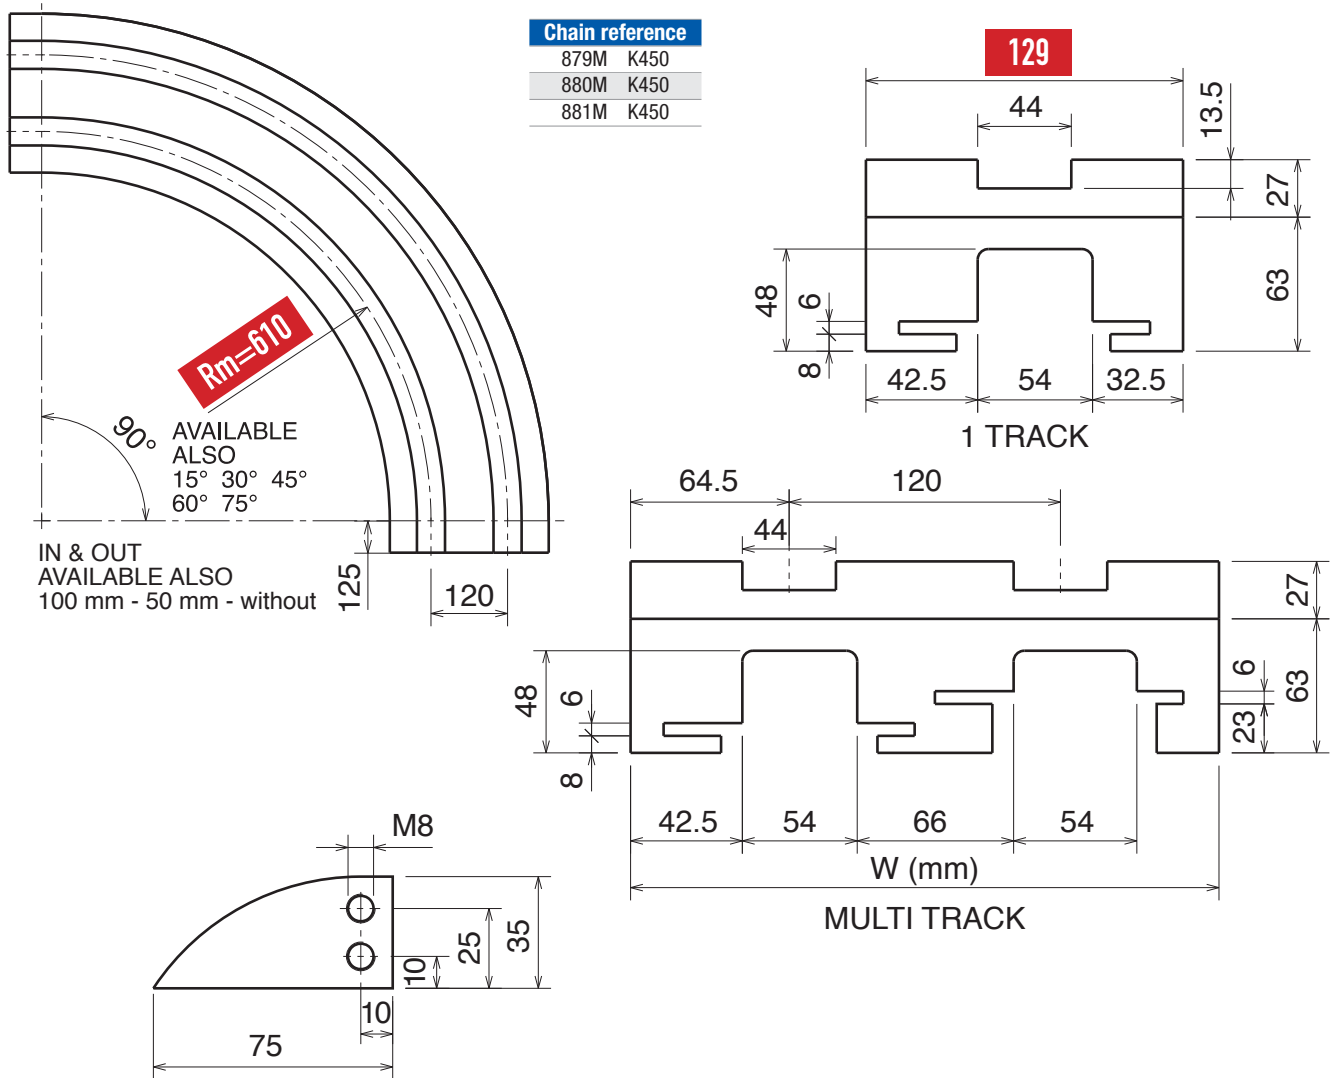



Magnetic System

Part	Article-Nr.	Tracks	W
704	70413615	1	129
704	70413625	2	249
704	70413635	3	369
704	70413645	4	489
704	70413655	5	609

Upper part available, on request, also in **BluLub**  and for abrasive applications.



Curva Larghezza Base = 214 mm / Curve Basic Width = 214 mm / Kurve Basisbreite = 214 mm

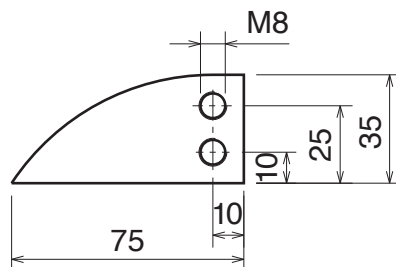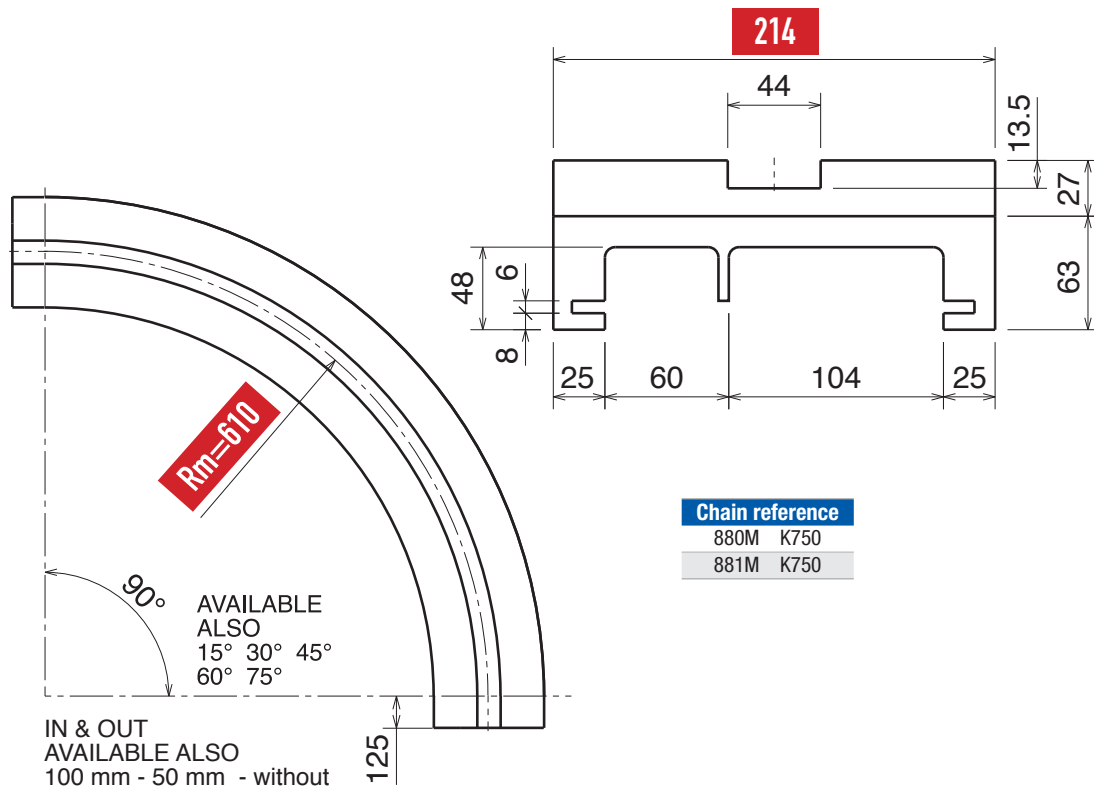

Magnetic System

Part	Article-Nr.	Tracks	W
716	71613615	1	214



Upper part available, on request,
also in **BluLub** 
and for abrasive applications.




Materiale:	Material:	Materialien:
Polietilene UHMW-PE	Polyethylene UHMW-PE	Polyäthylen UHMW-PE

 **M62 Series** Rm=750
 **M66 Series** Rm=860
 **M65 Series** Rm=1000

880-881 K750


Curva Larghezza Base = 214 mm / Curve Basic Width = 214 mm / Kurve Basisbreite = 214 mm

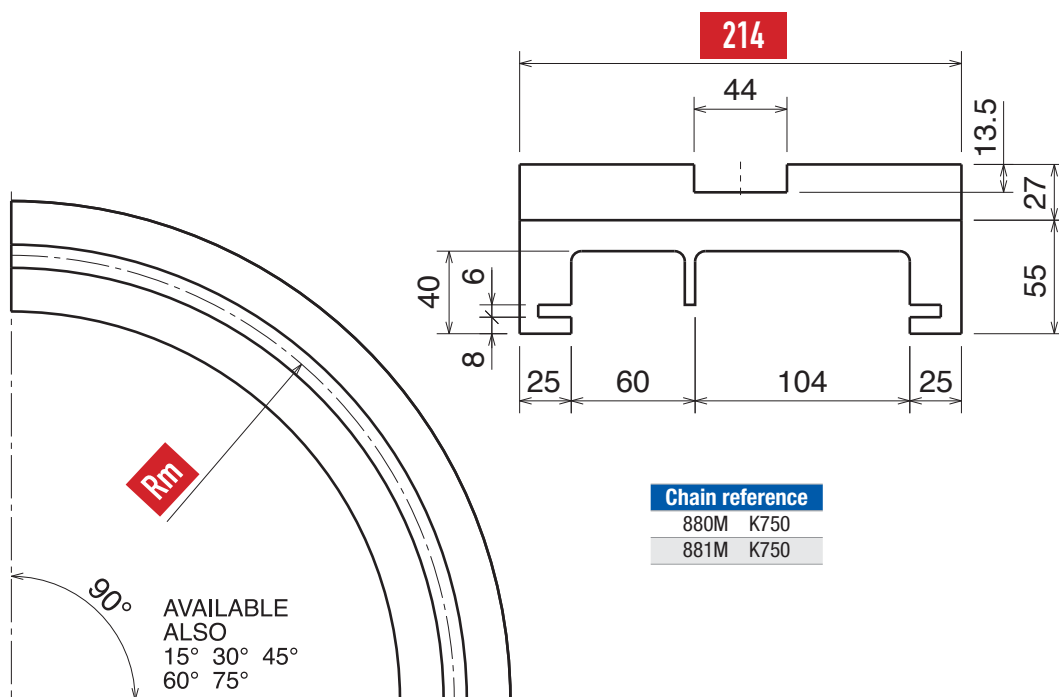

Chain reference

880M K750
 881M K750

IN & OUT
 AVAILABLE ALSO
 125 mm - 100 mm - 50 mm

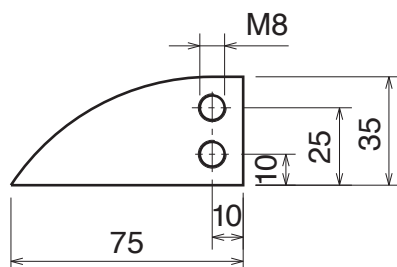

Magnetic System


Part	Article-Nr.	Tracks	W	Rm
707	70716610	1	214	750
707	70718610	1	214	860
707	70719610	1	214	1000




Upper part available, on request,
 also in 
 and for abrasive applications.



Curva Larghezza Base = 200 mm / Curve Basic Width = 200 mm / Kurve Basisbreite = 200 mm


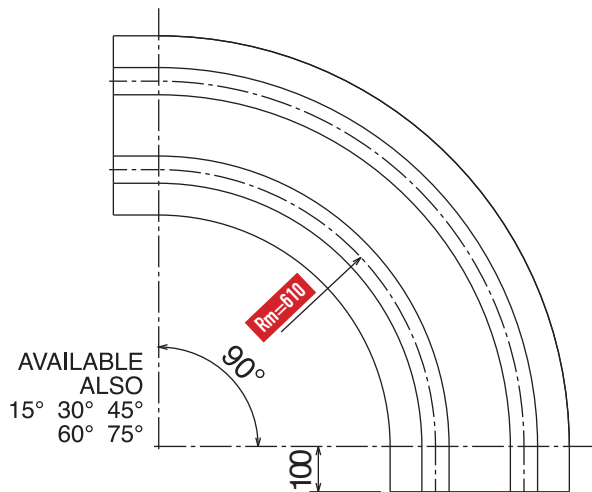


IN & OUT
AVAILABLE ALSO
125 mm - 100 mm - without

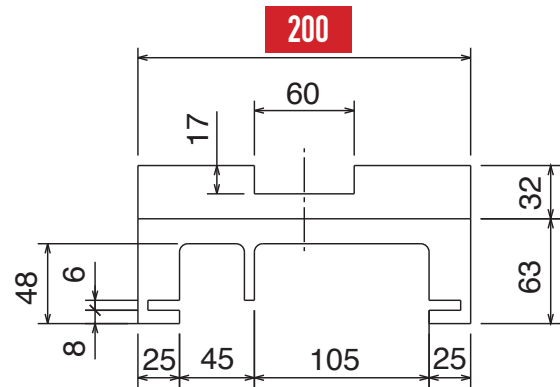

1 TRACK

Chain reference	
882M	K750
8857M	K750

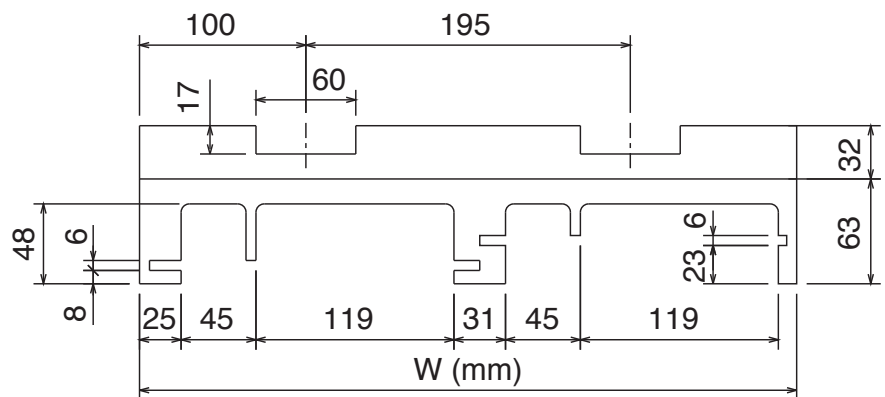

MULTI TRACK

Magnetic System




Upper part available, on request,
also in 
and for abrasive applications.



Part	Article-Nr.	Tracks	W
717	71713614	1	200
717	71713624	2	395
717	71713634	3	590
717	71713644	4	785

Curva Larghezza Base = 200 mm / Curve Basic Width = 200 mm / Kurve Basisbreite = 200 mm

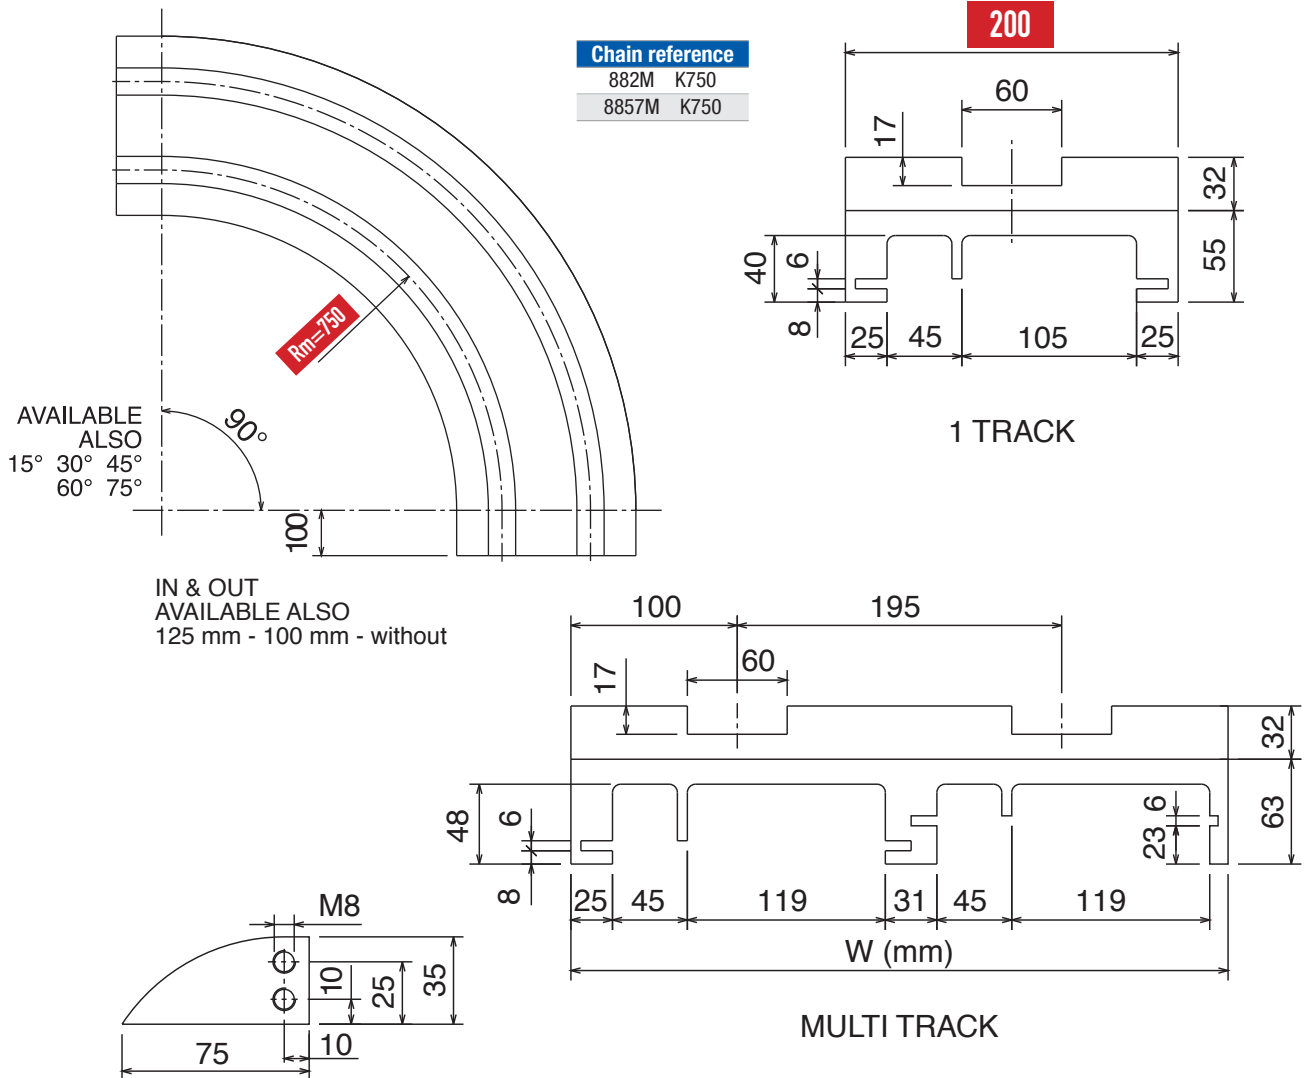

Magnetic System


Part	Article-Nr.	Tracks	W
718	71816614	1	200
718	71816624	2	395
718	71816634	3	590



Upper part available, on request,
also in **BluLub** 
and for abrasive applications.



Curva Larghezza Base = 214 mm; Passo = 200 mm / Curve Basic Width = 214 mm; Pitch = 200 mm / Kurve Basisbreite = 214 mm; Teilung = 200 mm

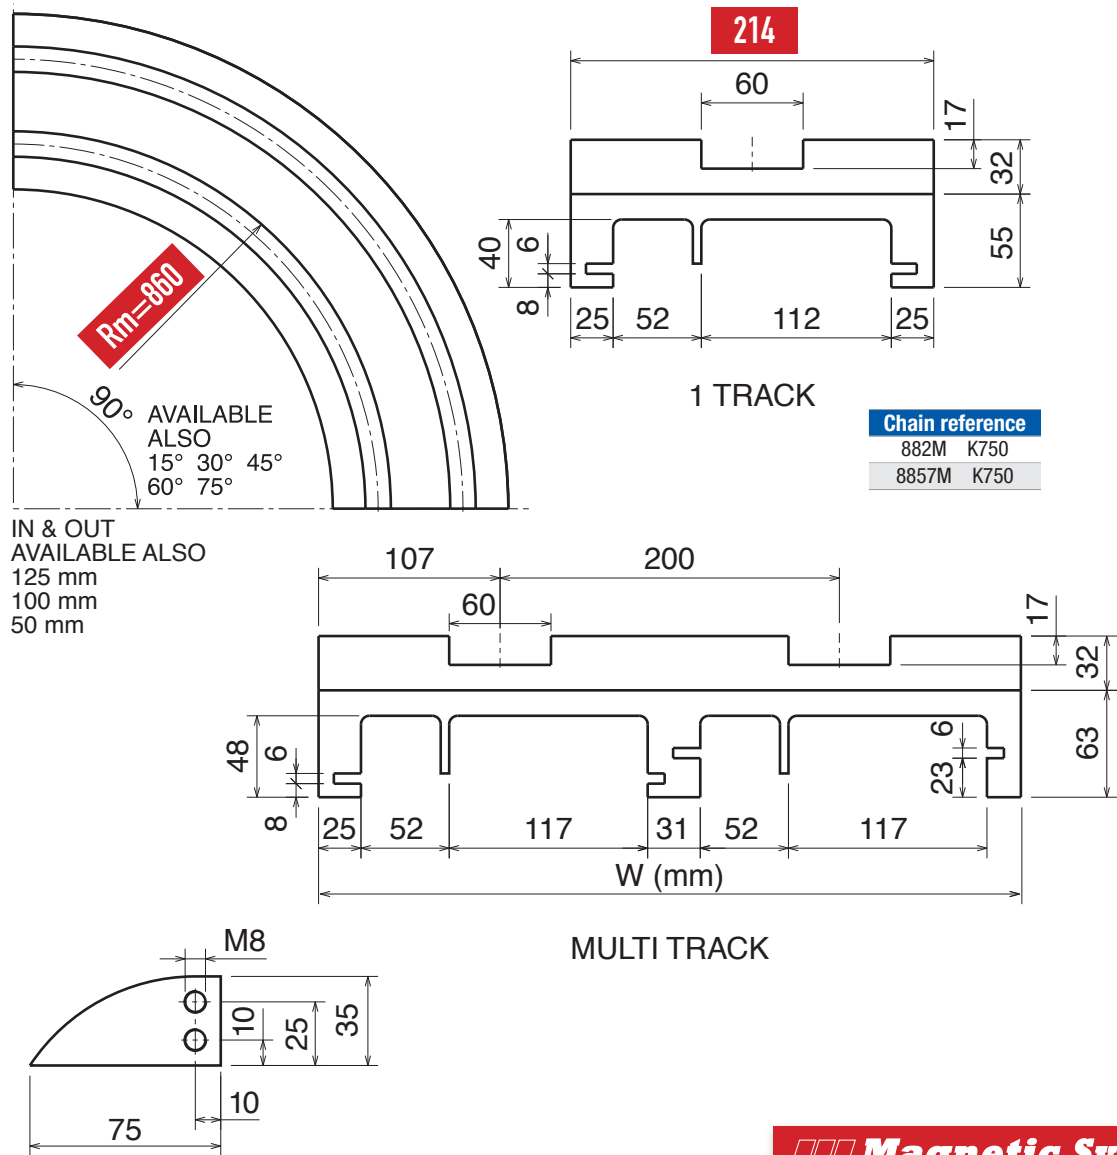

Magnetic System





Upper part available, on request,
also in **BluLub** 
and for abrasive applications.



Part	Article-Nr.	Tracks	W
708	70818610	1	214
708	70818620	2	410
708	70818630	3	606

67

Curva Larghezza Base = 270 mm / Curve Basic Width = 270 mm / Kurve Basisbreite = 270 mm

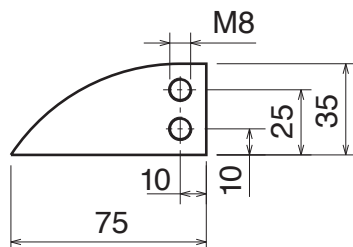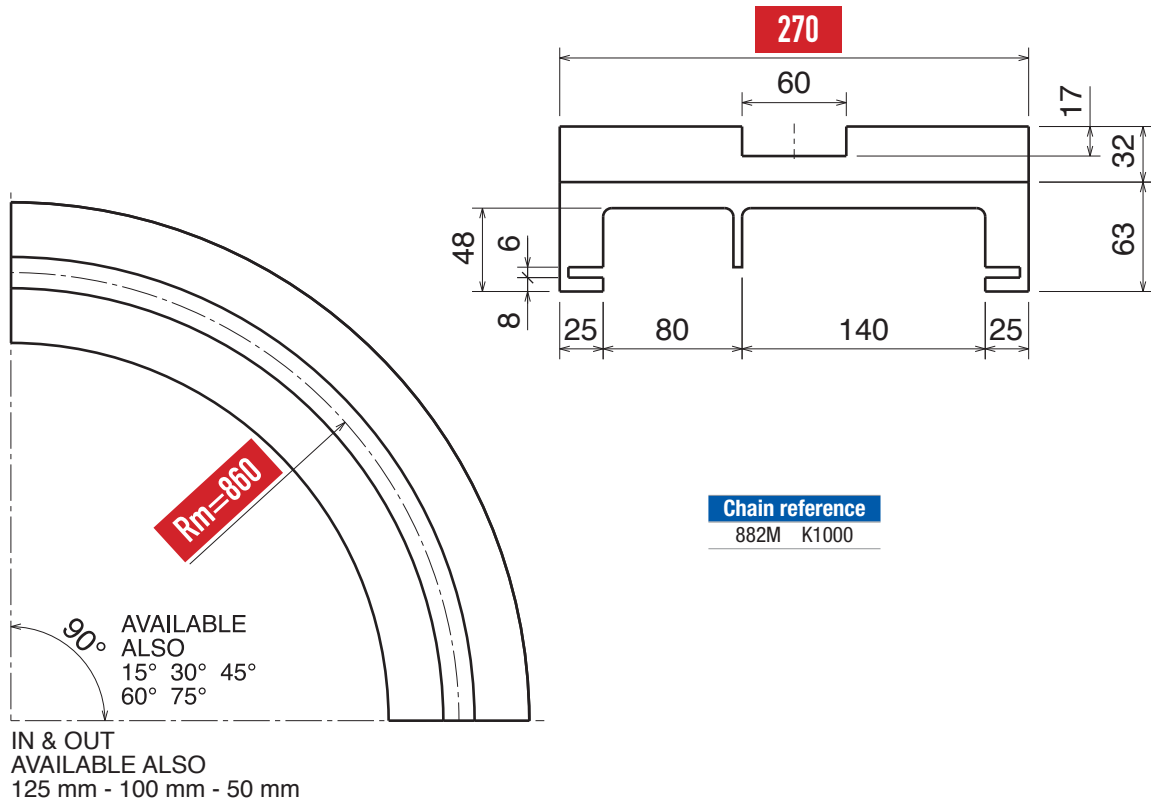

Magnetic System





Part	Article-Nr.	Tracks	W
709	70918610	1	270

Upper part available, on request,
also in **BluLub** 
and for abrasive applications.



Materiale:	Material:	Materialien:
Polietilene UHMW-PE	Polyethylene UHMW-PE	Polyäthylen UHMW-PE

Curva Larghezza Base = 320 mm / Curve Basic Width = 320 mm / Kurve Basisbreite = 320 mm

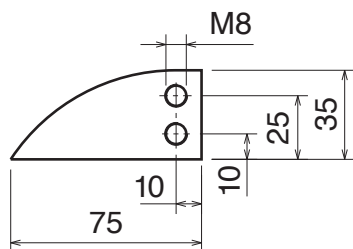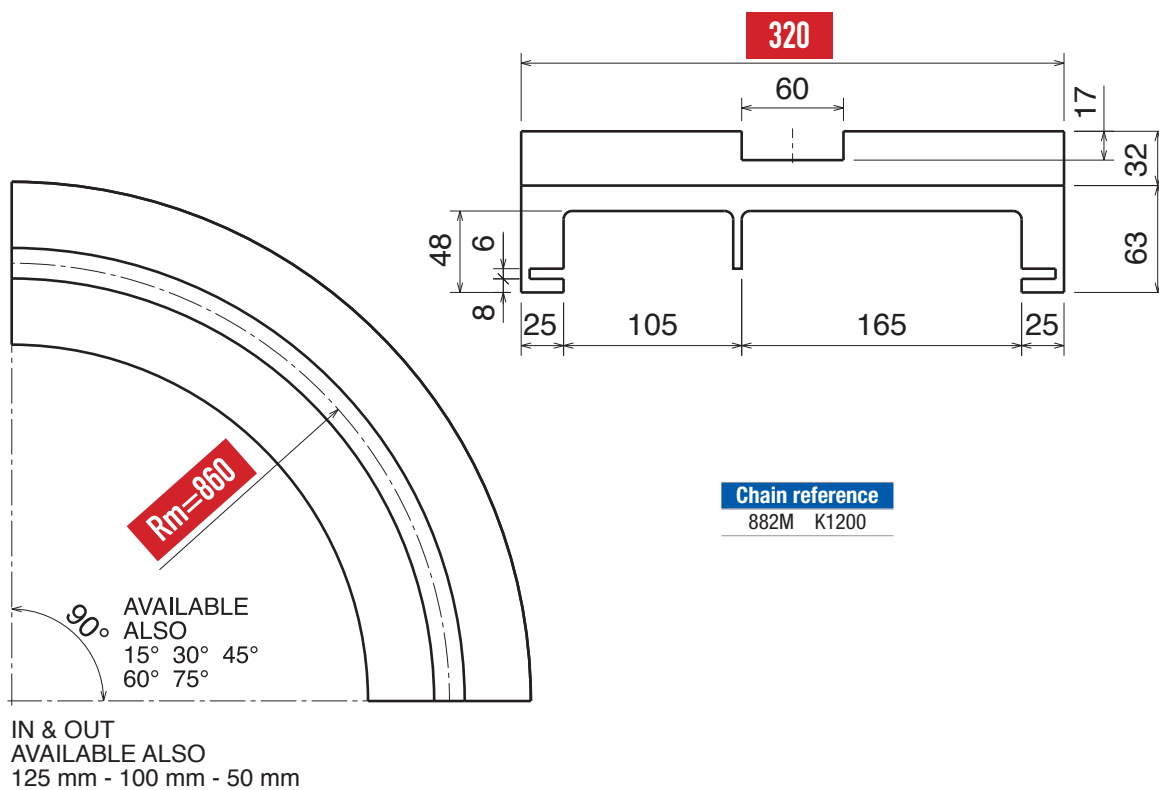

Magnetic System





Part	Article-Nr.	Tracks	W
710	71018610	1	320

Upper part available, on request, also in **BluLub** and for abrasive applications.




Curva Larghezza Base = 214 mm / Curve Basic Width = 214 mm / Kurve Basisbreite = 214 mm

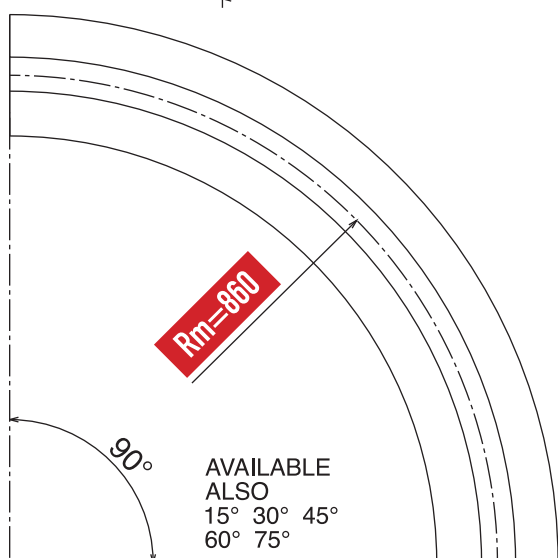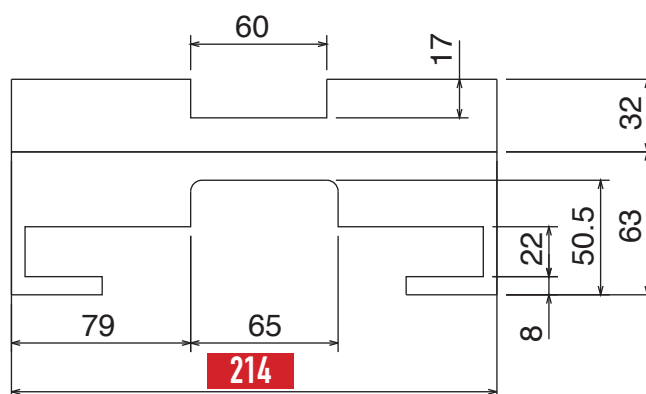

IN & OUT
AVAILABLE ALSO
125 mm - 100 mm - 50 mm

Chain reference
LBP 882M K750



Magnetic System





Upper part available, on request,
also in **BluLub** 
and for abrasive applications.




Part	Article-Nr.	Tracks	W
781	78118610	1	214

Curva Larghezza Base = 290 mm / Curve Basic Width = 290 mm / Kurve Basisbreite = 290 mm

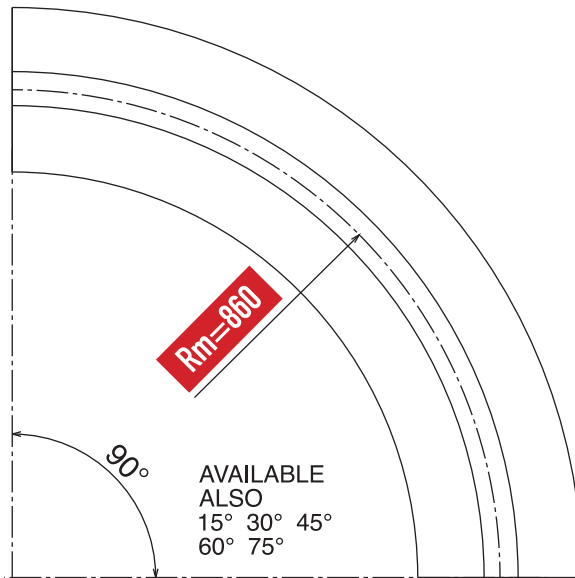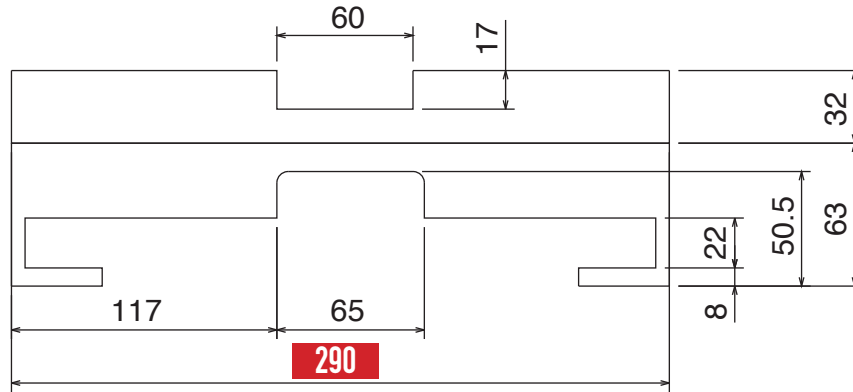

IN & OUT
AVAILABLE ALSO
125 mm - 100 mm - 50 mm

Chain reference
LBP 882M K1000



Magnetic System





Upper part available, on request,
also in **BluLub** 
and for abrasive applications.




Part	Article-Nr.	Tracks	W
782	78218610	1	290

Curva Larghezza Base = 340 mm / Curve Basic Width = 340 mm / Kurve Basisbreite = 340 mm

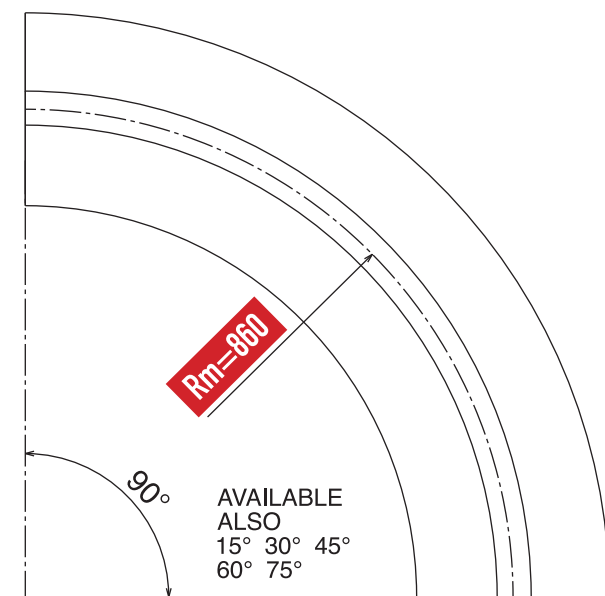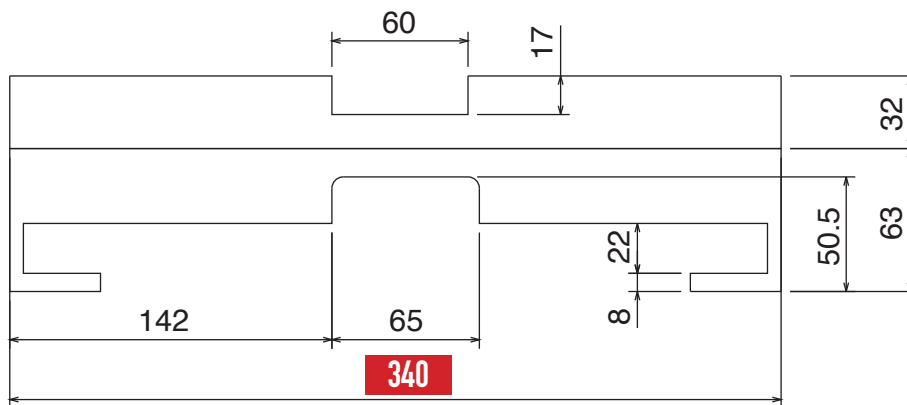

IN & OUT
AVAILABLE ALSO
125 mm - 100 mm - 50 mm

Chain reference
LBP 882M K1200



Magnetic System






Upper part available, on request,
also in **BluLub** 
and for abrasive applications.



Part	Article-Nr.	Tracks	W
783	78318610	1	340

Curva Larghezza Base = 100 mm; Passo = 85 mm / Curve Basic Width = 100 mm; Pitch = 85 mm / Kurve Basisbreite = 100 mm; Teilung = 85 mm

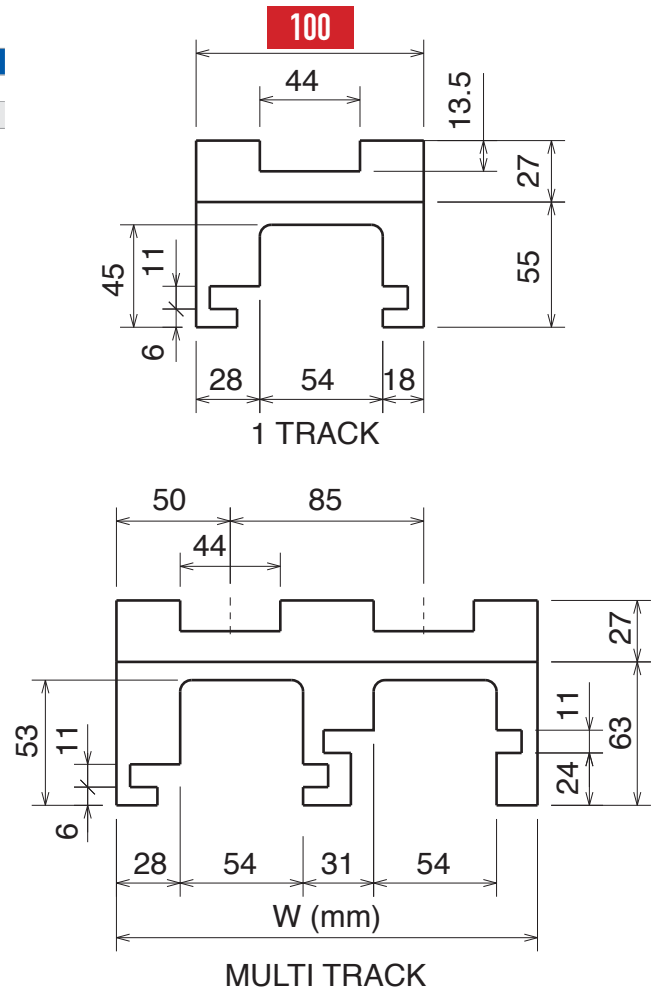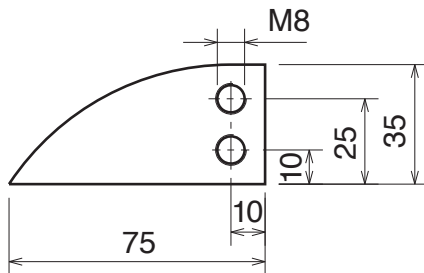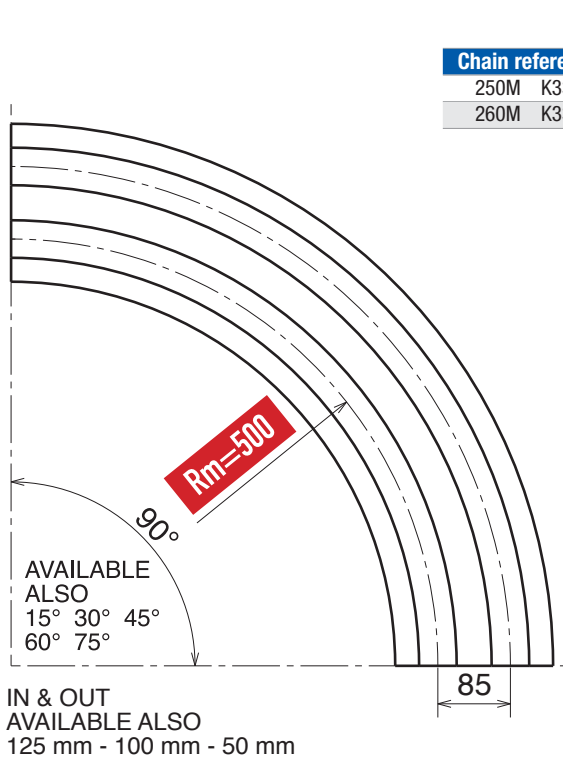





Magnetic System

Part	Article-Nr.	Tracks	W
705	70511610	1	100
705	70511620	2	185
705	70511630	3	270
705	70511640	4	355
705	70511650	5	440
705	70511660	6	525
705	70511670	7	610
705	70511680	8	695

Upper part available, on request,
also in **BluLub** Movex Engineering - Professional UHMW-PE
and for abrasive applications.



Curva Larghezza Base = 100 mm; Passo = 85 mm / Curve Basic Width = 100 mm; Pitch = 85 mm / Kurve Basisbreite = 100 mm; Teilung = 85 mm

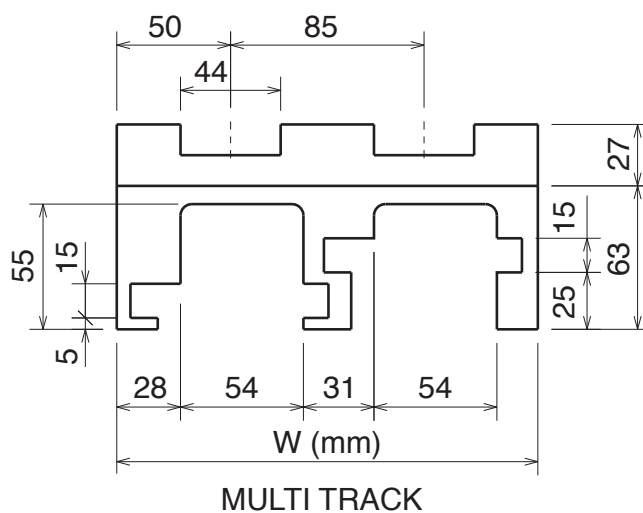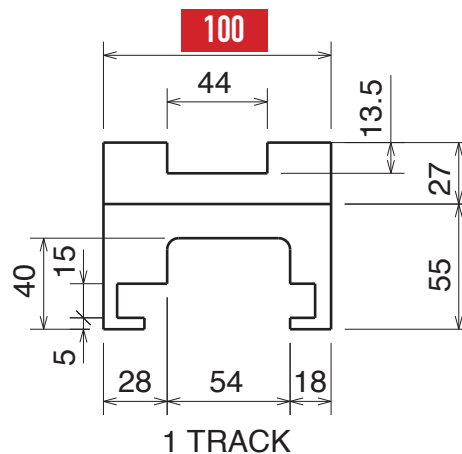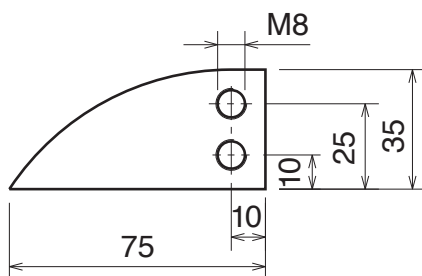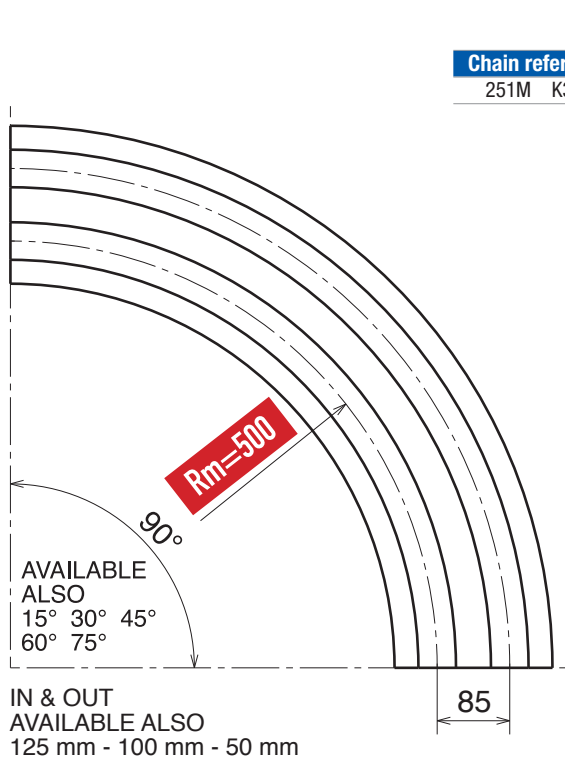

Magnetic System



Upper part available, on request,
also in 
and for abrasive applications.




Part	Article-Nr.	Tracks	W
706	70611610	1	100
706	70611620	2	185
706	70611630	3	270
706	70611640	4	355
706	70611650	5	440
706	70611660	6	525
706	70611670	7	610
706	70611680	8	695

Materiale:	Material:	Materialien:
Polietilene UHMW-PE	Polyethylene UHMW-PE	Polyäthylen UHMW-PE

Curve Rm=500
Curves Rm=500
Kurven Rm=500

880-881 TAB

Curva 880-881 TAB K325-K450-K750 / Curve 880-881 TAB K325-K450-K750 / Kurve 880-881 TAB K325-K450-K750

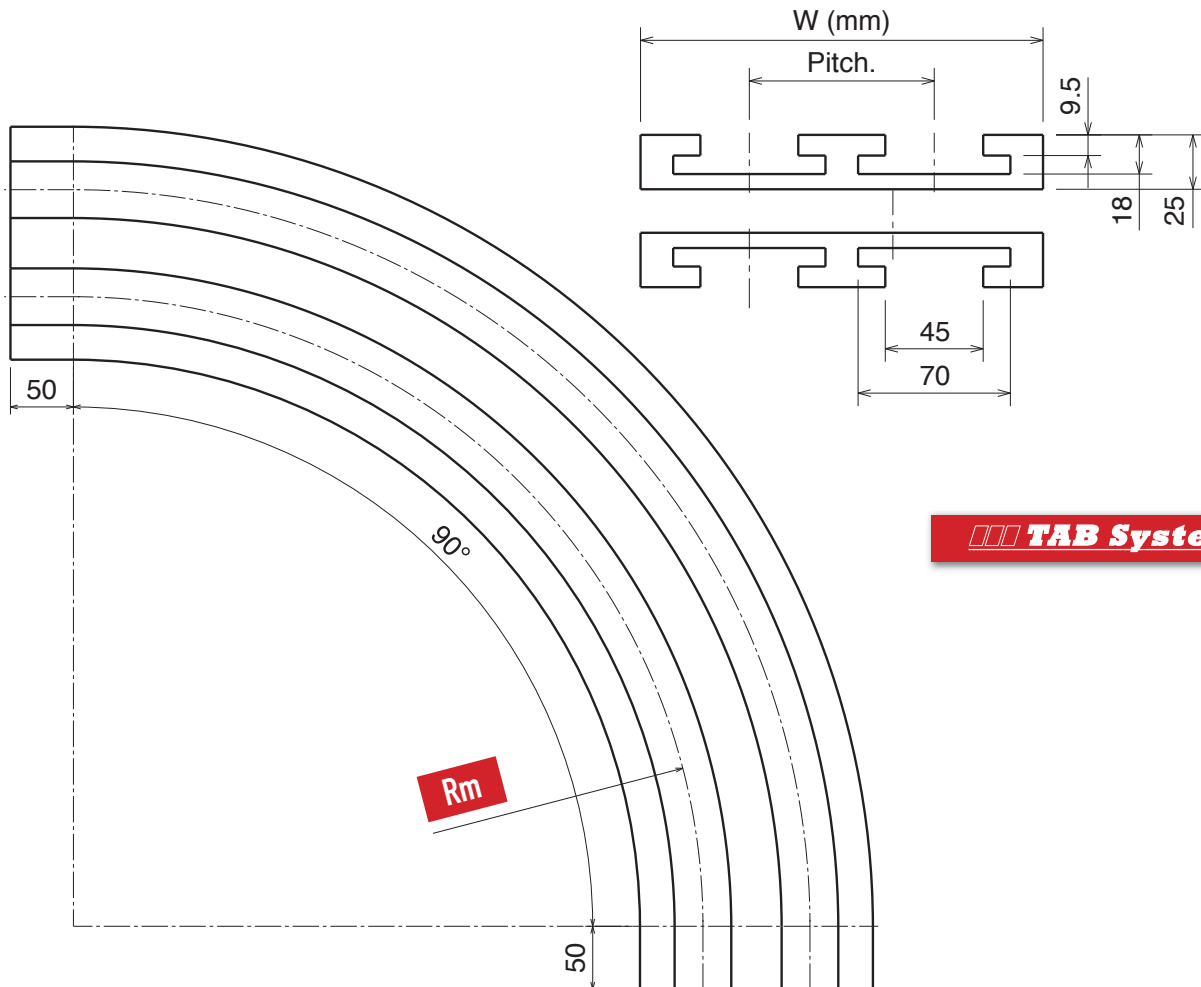


TAB System






Part	Article-Nr.	Tracks	W	Rm	Pitch
K325					
720	72021612	1	100	500	85
720	72021622	2	185		
720	72021632	3	270		
720	72021642	4	355		
720	72021652	5	440		
720	72021662	6	525		
K450					
721	72123612	1	130	610	120
721	72123622	2	250		
721	72123632	3	370		
721	72123642	4	490		
721	72123652	5	610		
721	72123662	6	720		
K750					
722	72223612	1	200	610	195
722	72223622	2	395		
722	72223632	3	590		
722	72223642	4	785		

Curva 882 TAB K750-K1000-K1200 / Curve 882 TAB K750-K1000-K1200 / Kurve 882 TAB K750-K1000-K1200

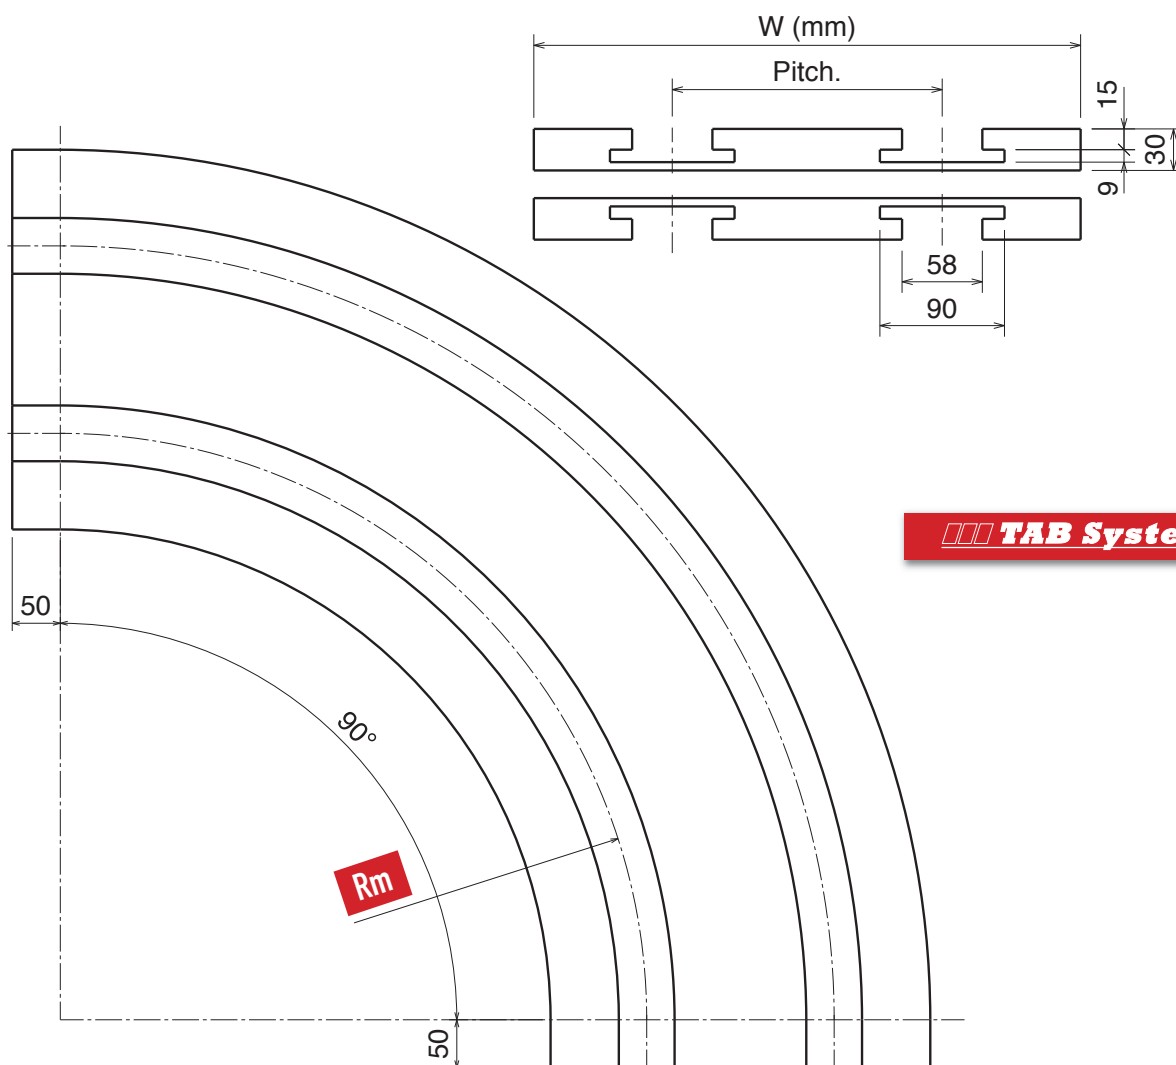

Part	Article-Nr.	Tracks	W	Rm	Pitch
K750					
723	72323612	1	200	610	195
723	72323622	2	395		
723	72323632	3	590		
723	72323642	4	785		
K1000					
724	72423612	1	270	610	230
724	72423622	2	530		
724	72423632	3	790		
724	72423642	4	1050		
K1200					
725	72523612	1	320	610	310
725	72523622	2	630		
725	72523632	3	940		
725	72523642	4	1250		


 Series 520 pag. 78	 Series 520_FG pag. 79	 Series 520_GT pag. 80	 Series 520_LBP pag. 81	 Series 521 pag. 82	 Series 521 pag. 83
 Series 590 pag. 84	 Series 550 pag. 85	 Series 520_FG pag. 86	 Series 551 pag. 87	 Series 551_GT pag. 88	 Series 551_LBP pag. 89
 Series 600 pag. 90		 Series 500RR pag. 91	 Series 260 M pag. 91	 Series 260 M pag. 92	 Series 260 TAB pag. 92

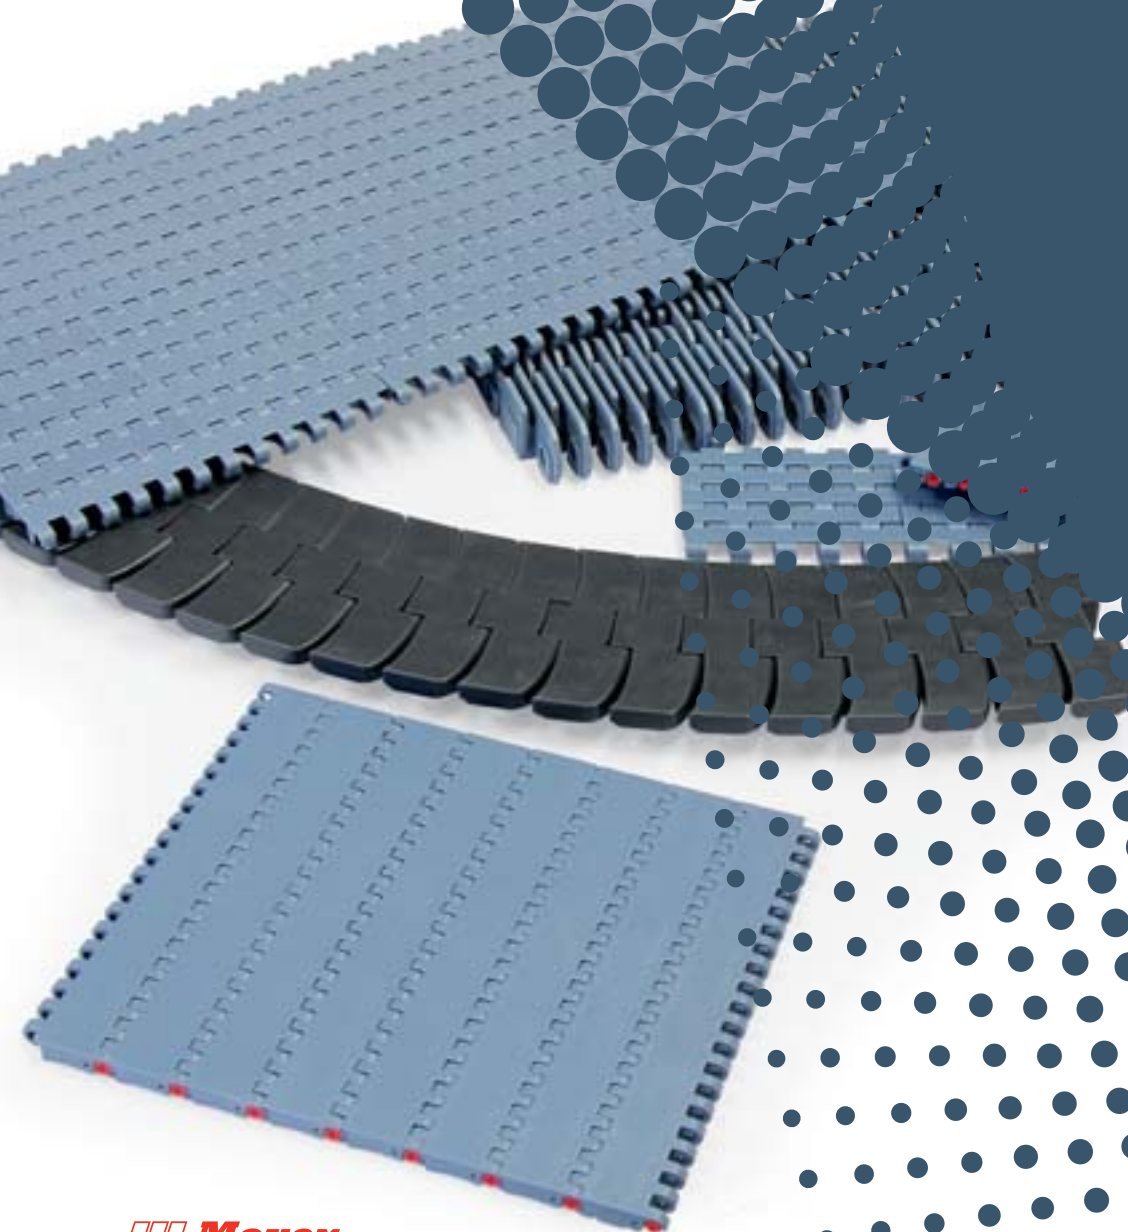


Tappeto Modulare 520 FT, H=8,7 M=85 / Modular Belt Series 520 FT, H=8,7 M=85 / Modulare Mattenkette 520 FT, H=8,7 M=85

Series	Material	Width	Version
5201	*	0085	A
5201	*	0170	A
5201	*	0255	A
5201	*	0340	A
5201	*	0425	A
5201	*	0510	A
5201	*	0595	A
5201	*	0680	A
5201	*	0765	A

Series	Material	Width	Version
5201	*	0850	A
5201	*	0935	A
5201	*	1020	A
5201	*	1105	A
5201	*	1190	A
5201	*	1275	A
5201	*	1360	A
5201	*	1445	A
5201	*	1530	A

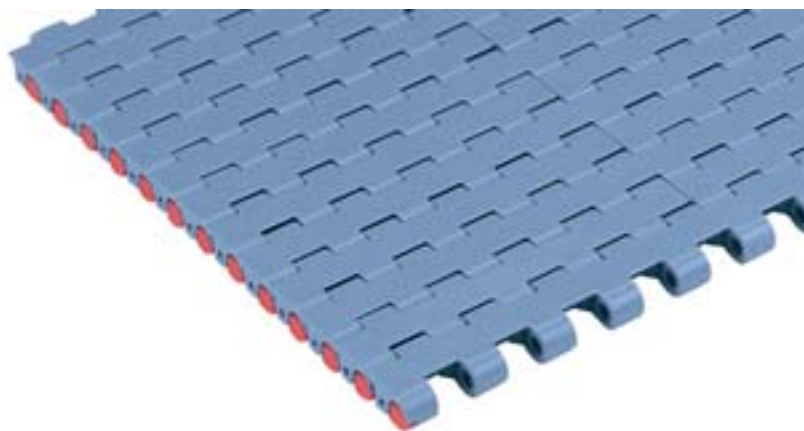

VERSION A - STANDARD

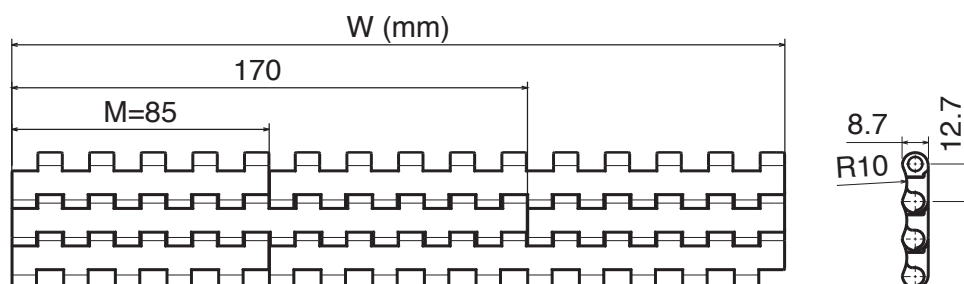

* Material

01 LFA - Acetal Resin

Max working load: 21500 N/m

Weight: 7,8 kg/m

Temperature range:

dry -40÷80 °C

wet -40÷65 °C

Pin material: PBT white

03 MX - PBT

Max working load: 17500 N/m

Weight: 7,5 kg/m

Temperature range:


dry -40÷120 °C

wet -40÷60 °C


Pin material: POM grey

Also available, on request,
other materials and widths

VERSION B - WITH 1 POSITIONER

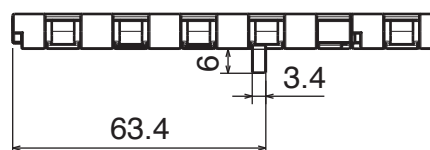

VERSION C - WITH 2 POSITIONERS

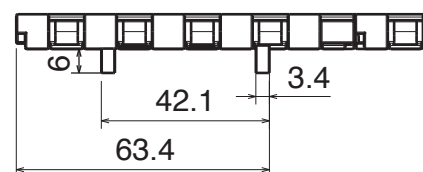

Series	Material	Width	Version
5201	*	0085	B
5201	*	0170	B
5201	*	0255	B
5201	*	0340	B
5201	*	0425	B
5201	*	0510	B
5201	*	0595	B
5201	*	0680	B
5201	*	0765	B

Series	Material	Width	Version
5201	*	0850	B
5201	*	0935	B
5201	*	1020	B
5201	*	1105	B
5201	*	1190	B
5201	*	1275	B
5201	*	1360	B
5201	*	1445	B
5201	*	1530	B

Series	Material	Width	Version
5201	*	0085	C
5201	*	0170	C
5201	*	0255	C
5201	*	0340	C
5201	*	0425	C
5201	*	0510	C
5201	*	0595	C
5201	*	0680	C
5201	*	0765	C

Series	Material	Width	Version
5201	*	0850	C
5201	*	0935	C
5201	*	1020	C
5201	*	1105	C
5201	*	1190	C
5201	*	1275	C
5201	*	1360	C
5201	*	1445	C
5201	*	1530	C






Tappeto Modulare 520 FG, H=8,7 M=85 / Modular Belt Series 520 FG, H=8,7 M=85 / Modulare Mattenkette 520 FG, H=8,7 M=85

Series	Material	Width	Version
5202	*	0085	A
5202	*	0170	A
5202	*	0255	A
5202	*	0340	A
5202	*	0425	A
5202	*	0510	A
5202	*	0595	A
5202	*	0680	A
5202	*	0765	A

Series	Material	Width	Version
5202	*	0850	A
5202	*	0935	A
5202	*	1020	A
5202	*	1105	A
5202	*	1190	A
5202	*	1275	A
5202	*	1360	A
5202	*	1445	A
5202	*	1530	A



VERSION A - STANDARD

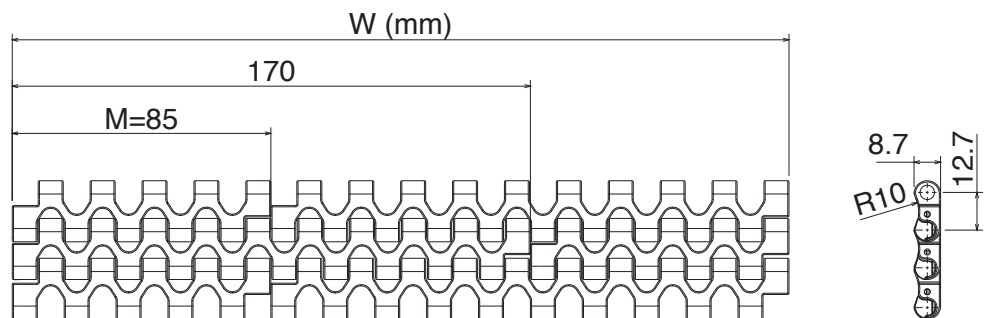

* Material

01 LFA - Acetal Resin



Max working load: 21500 N/m
Weight: 7,5 kg/m
Temperature range:
dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white

03 MX - PBT



Max working load: 17500 N/m
Weight: 7,2 kg/m
Temperature range:
dry -40÷120 °C
wet -40÷60 °C
Pin material: POM grey

Also available, on request,
other materials and widths

VERSION B - WITH 1 POSITIONER

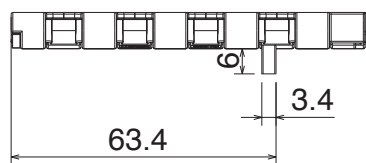

VERSION C - WITH 2 POSITIONERS

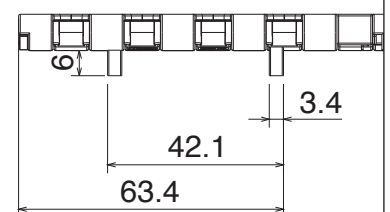

Series	Material	Width	Version
5202	*	0085	B
5202	*	0170	B
5202	*	0255	B
5202	*	0340	B
5202	*	0425	B
5202	*	0510	B
5202	*	0595	B
5202	*	0680	B
5202	*	0765	B

Series	Material	Width	Version
5202	*	0850	B
5202	*	0935	B
5202	*	1020	B
5202	*	1105	B
5202	*	1190	B
5202	*	1275	B
5202	*	1360	B
5202	*	1445	B
5202	*	1530	B

Series	Material	Width	Version
5202	*	0085	C
5202	*	0170	C
5202	*	0255	C
5202	*	0340	C
5202	*	0425	C
5202	*	0510	C
5202	*	0595	C
5202	*	0680	C
5202	*	0765	C


Series	Material	Width	Version
5202	*	0850	C
5202	*	0935	C
5202	*	1020	C
5202	*	1105	C
5202	*	1190	C
5202	*	1275	C
5202	*	1360	C
5202	*	1445	C
5202	*	1530	C





Tappeto Modulare 520 GT, H=8,7 M=85 / Modular Belt Series 520 GT, H=8,7 M=85 / Modulare Mattenkette 520 GT, H=8,7 M=85

Series	Material	Width	Version
5203	*	0085	A
5203	*	0170	A
5203	*	0255	A
5203	*	0340	A
5203	*	0425	A
5203	*	0510	A
5203	*	0595	A
5203	*	0680	A
5203	*	0765	A

Series	Material	Width	Version
5203	*	0850	A
5203	*	0935	A
5203	*	1020	A
5203	*	1105	A
5203	*	1190	A
5203	*	1275	A
5203	*	1360	A
5203	*	1445	A
5203	*	1530	A

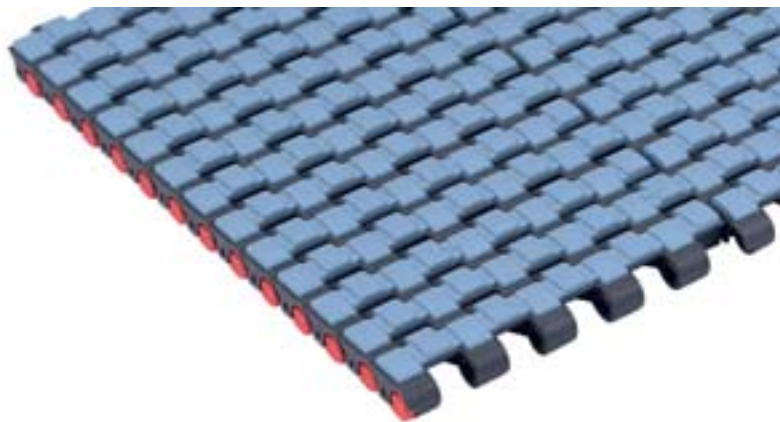

VERSION A - STANDARD

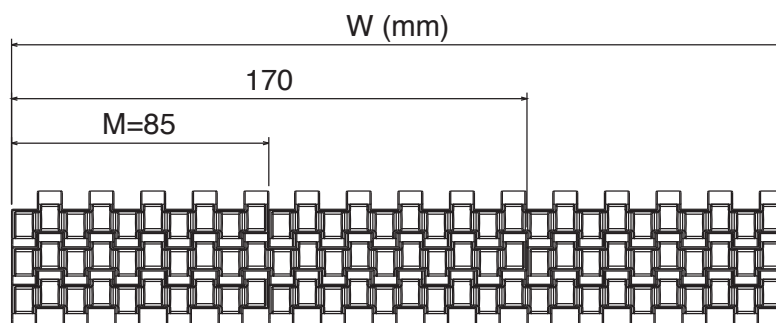

* Material

01 LFA - Acetal Resin



Max working load: 21500 N/m
Weight: 9,0 kg/m
Temp. range: dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white
Hardness: 75 ShA

02 PP - Polypropylene



Max working load: 13000 N/m
Weight: 7,5 kg/m
Temp. range: dry 4÷80 °C
wet 4÷65 °C
Pin material: PP blu
Hardness: 75 ShA


03 MX - PBT




Max working load: 17500 N/m
Weight: 9,3 kg/m
Temp. range: dry -40÷120 °C
wet -40÷60 °C
Pin material: POM grey
Hardness: 75 ShA

Also available, on request,
other materials and widths

VERSION B - WITH 1 POSITIONER



VERSION C - WITH 2 POSITIONERS



Series	Material	Width	Version
5203	*	0085	B
5203	*	0170	B
5203	*	0255	B
5203	*	0340	B
5203	*	0425	B
5203	*	0510	B
5203	*	0595	B
5203	*	0680	B
5203	*	0765	B

Series	Material	Width	Version
5203	*	0850	B
5203	*	0935	B
5203	*	1020	B
5203	*	1105	B
5203	*	1190	B
5203	*	1275	B
5203	*	1360	B
5203	*	1445	B
5203	*	1530	B

Series	Material	Width	Version
5203	*	0085	C
5203	*	0170	C
5203	*	0255	C
5203	*	0340	C
5203	*	0425	C
5203	*	0510	C
5203	*	0595	C
5203	*	0680	C
5203	*	0765	C

Series	Material	Width	Version
5203	*	0850	C
5203	*	0935	C
5203	*	1020	C
5203	*	1105	C
5203	*	1190	C
5203	*	1275	C
5203	*	1360	C
5203	*	1445	C
5203	*	1530	C




pg 94-95

New


Tappeto Modulare 520 LBP, H=8,7 M=85 / Modular Belt Series 520 LBP, H=8,7 M=85 / Modulare Mattenkette 520 LBP, H=8,7 M=85

Series	Material	Width	Version
5204	*	0085	A
5204	*	0170	A
5204	*	0255	A
5204	*	0340	A
5204	*	0425	A
5204	*	0510	A
5204	*	0595	A
5204	*	0680	A
5204	*	0765	A

Series	Material	Width	Version
5204	*	0850	A
5204	*	0935	A
5204	*	1020	A
5204	*	1105	A
5204	*	1190	A
5204	*	1275	A
5204	*	1360	A
5204	*	1445	A
5204	*	1530	A

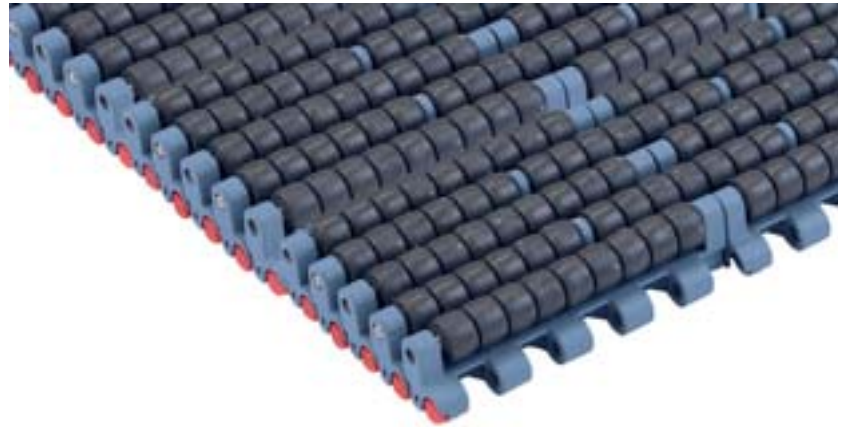

VERSION A - STANDARD

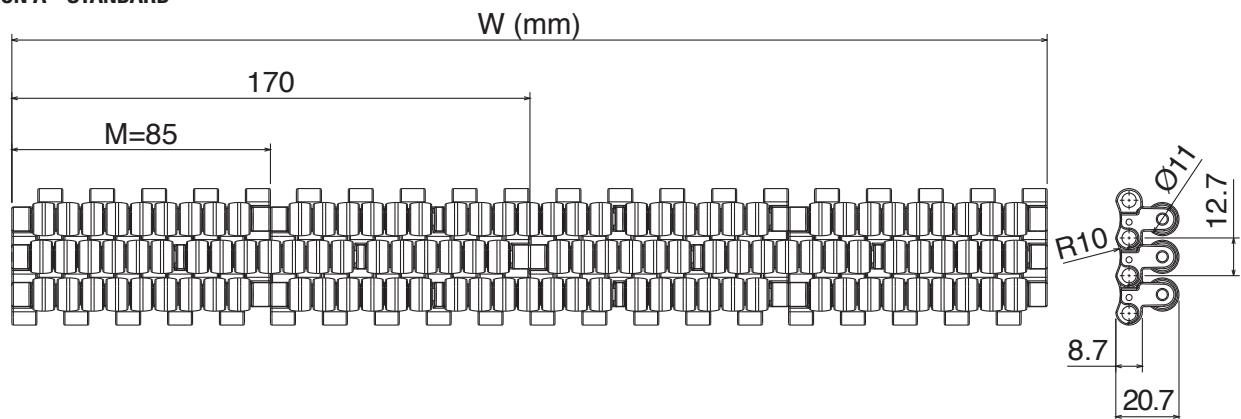

* Material

01 LFA - Acetal Resin

Max working load: 21500 N/m

Weight: 24,0 kg/m

Temperature range:


dry -40÷80 °C

wet 1÷65 °C


Pin material: PBT white

Also available, on request,
other materials and widths

VERSION B - WITH 1 POSITIONER



VERSION C - WITH 2 POSITIONERS

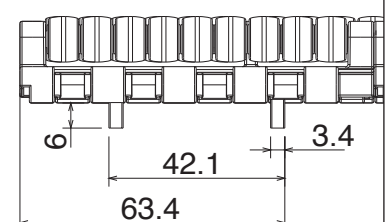

Series	Material	Width	Version
5204	*	0085	B
5204	*	0170	B
5204	*	0255	B
5204	*	0340	B
5204	*	0425	B
5204	*	0510	B
5204	*	0595	B
5204	*	0680	B
5204	*	0765	B

Series	Material	Width	Version
5204	*	0850	B
5204	*	0935	B
5204	*	1020	B
5204	*	1105	B
5204	*	1190	B
5204	*	1275	B
5204	*	1360	B
5204	*	1445	B
5204	*	1530	B

Series	Material	Width	Version
5204	*	0085	C
5204	*	0170	C
5204	*	0255	C
5204	*	0340	C
5204	*	0425	C
5204	*	0510	C
5204	*	0595	C
5204	*	0680	C
5204	*	0765	C

Series	Material	Width	Version
5204	*	0850	C
5204	*	0935	C
5204	*	1020	C
5204	*	1105	C
5204	*	1190	C
5204	*	1275	C
5204	*	1360	C
5204	*	1445	C
5204	*	1530	C









pg 94-95

Piatto di trasferimento / Transfer Plate / Überschubplatte



New

Part	Article-Nr.	L
228	22801	85
228	22802	170
228	22803	255

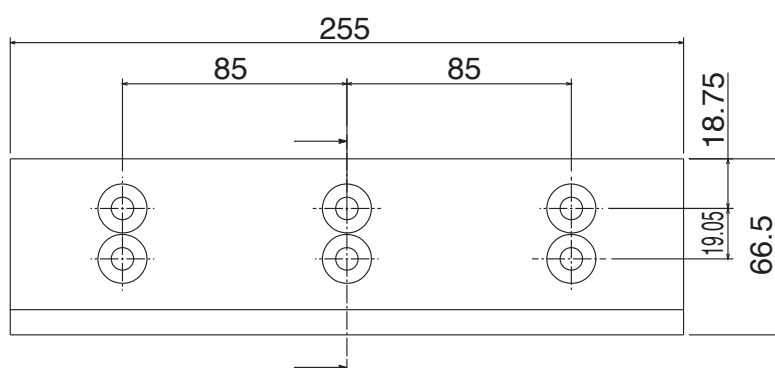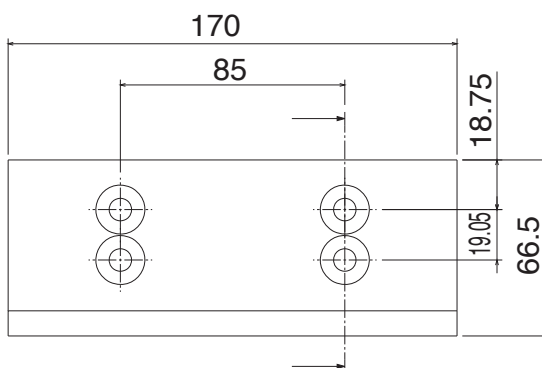


Tappeto Modulare 521 FT, H=8,7 M=750 / Modular Belt Series 521 FT, H=8,7 M=750 / Modulare Mattenkette 521 FT, H=8,7 M=750

Series	Material	Width	Version
5311	*	9750	A



VERSION A - STANDARD

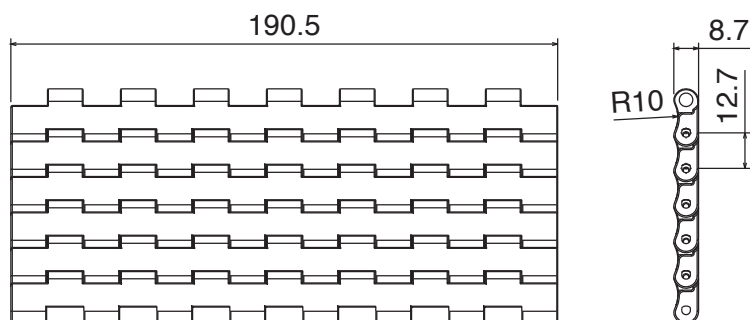

* Material

01 LFA - Acetal Resin

Max working load: 21500 N/m

Weight: 8,0 kg/m

Temperature range:

dry -40÷80 °C

wet -40÷65 °C

Pin material: PBT white

03 MX - PBT

Max working load: 17500 N/m

Weight: 7,8 kg/m

Temperature range:


dry -40÷120 °C

wet -40÷60 °C

Pin material: POM grey

Also available, on request,
other materials and widths

VERSION C - WITH 2 POSITIONERS



Series	Material	Width	Version
5311	*	9750	C




pg 96


Tappeto Modulare 590 FT, H=8,7 M=3" / Modular Belt Series 590 FT, H=8,7 M=3" / Modulare Mattenkette 590 FT, H=8,7 M=3"

Series	Material	Width	Version
5301	*	0003	A
5301	*	0006	A
5301	*	0009	A
5301	*	0012	A
5301	*	0015	A
5301	*	0018	A
5301	*	0021	A
5301	*	0024	A
5301	*	0027	A

Series	Material	Width	Version
5301	*	0030	A
5301	*	0033	A
5301	*	0036	A
5301	*	0039	A
5301	*	0042	A
5301	*	0045	A
5301	*	0048	A
5301	*	0051	A
5301	*	0054	A

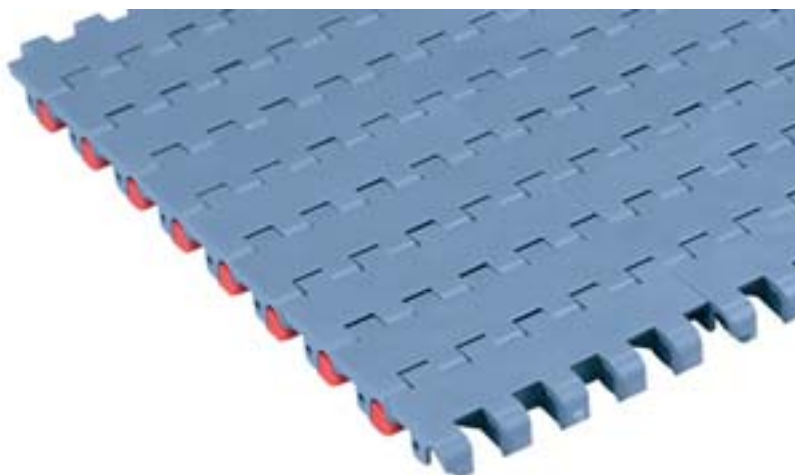

VERSION A - STANDARD

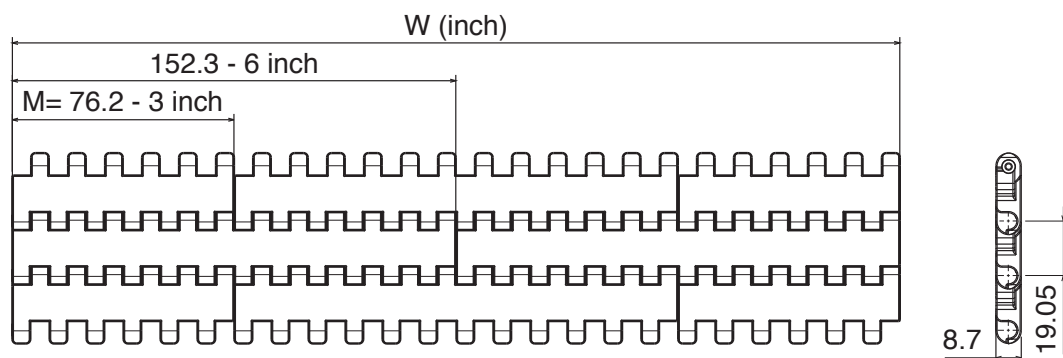

* Material

01 LFA - Acetal Resin

Max working load: 30000 N/m

Weight: 7,2 kg/m

Temperature range:

dry -40÷80 °C

wet -40÷65 °C

Pin material: PBT white

03 MX - PBT

Max working load: 24000 N/m

Weight: 7,0 kg/m

Temperature range:


dry -40÷120 °C

wet -40÷60 °C

Pin material: POM grey

Also available, on request,
other materials and widths

VERSION C - WITH 2 POSITIONER

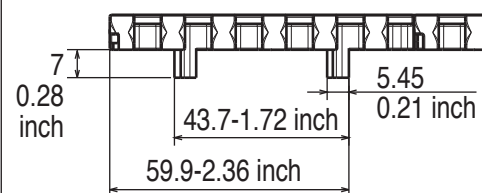

Series	Material	Width	Version
5301	*	0003	C
5301	*	0006	C
5301	*	0009	C
5301	*	0012	C
5301	*	0015	C
5301	*	0018	C
5301	*	0021	C
5301	*	0024	C
5301	*	0027	C


Series	Material	Width	Version
5301	*	0030	C
5301	*	0033	C
5301	*	0036	C
5301	*	0039	C
5301	*	0042	C
5301	*	0045	C
5301	*	0048	C
5301	*	0051	C
5301	*	0054	C




Tappeto Modulare 550 FT, H=8,7 M=85 / Modular Belt Series 550 FT, H=8,7 M=85 / Modulare Mattenkette 550 FT, H=8,7 M=85

Series	Material	Width	Version
5221	*	0085	A
5221	*	0170	A
5221	*	0255	A
5221	*	0340	A
5221	*	0425	A
5221	*	0510	A
5221	*	0595	A
5221	*	0680	A
5221	*	0765	A

Series	Material	Width	Version
5221	*	0850	A
5221	*	0935	A
5221	*	1020	A
5221	*	1105	A
5221	*	1190	A
5221	*	1275	A
5221	*	1360	A
5221	*	1445	A
5221	*	1530	A

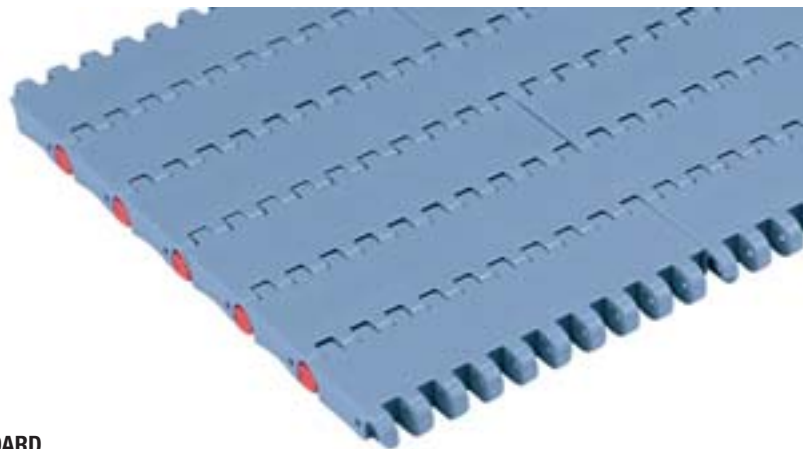

VERSION A - STANDARD

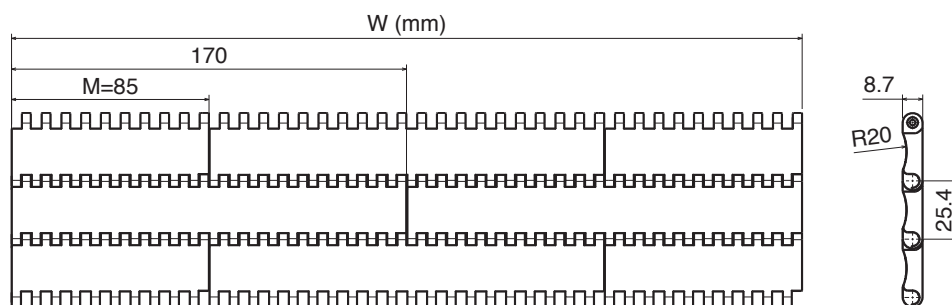

One Track Belt - K330

Series	Material	Width	Version
5221	*	9330	A
5221	*	9330	C

* Material

01 LFA - Acetal Resin



Max working load: 27500 N/m
 Weight: 8,5 kg/m
 Temperature range:
 dry -40÷80 °C
 wet -40÷65 °C
 Pin material: PBT white


03 MX - PBT




Max working load: 22000 N/m
 Weight: 8,2 kg/m
 Temperature range:
 dry -40÷120 °C
 wet -40÷60 °C
 Pin material: POM grey

Also available, on request,
 other materials and widths

VERSION B - WITH 1 POSITIONER

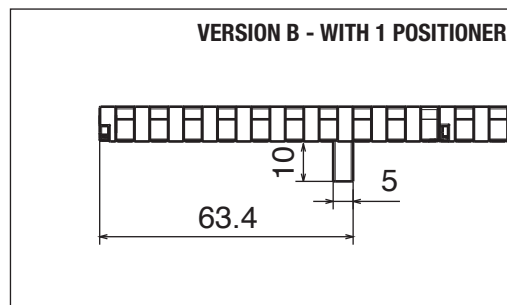

VERSION C - WITH 2 POSITIONERS

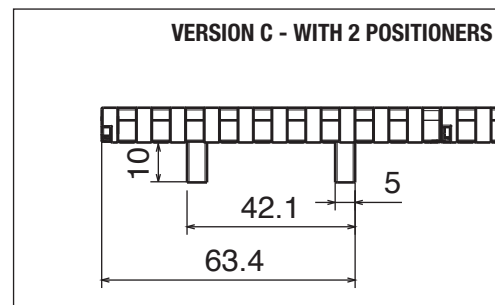

Series	Material	Width	Version
5221	*	0085	B
5221	*	0170	B
5221	*	0255	B
5221	*	0340	B
5221	*	0425	B
5221	*	0510	B
5221	*	0595	B
5221	*	0680	B
5221	*	0765	B

Series	Material	Width	Version
5221	*	0850	B
5221	*	0935	B
5221	*	1020	B
5221	*	1105	B
5221	*	1190	B
5221	*	1275	B
5221	*	1360	B
5221	*	1445	B
5221	*	1530	B


Series	Material	Width	Version
5221	*	0085	C
5221	*	0170	C
5221	*	0255	C
5221	*	0340	C
5221	*	0425	C
5221	*	0510	C
5221	*	0595	C
5221	*	0680	C
5221	*	0765	C

Series	Material	Width	Version
5221	*	0850	C
5221	*	0935	C
5221	*	1020	C
5221	*	1105	C
5221	*	1190	C
5221	*	1275	C
5221	*	1360	C
5221	*	1445	C
5221	*	1530	C


Tappeto Modulare 550 FG, H=8,7 M=85 / Modular Belt Series 550 FG, H=8,7 M=85 / Modulare Mattenkette 550 FG, H=8,7 M=85

Series	Material	Width	Version
5222	*	0085	A
5222	*	0170	A
5222	*	0255	A
5222	*	0340	A
5222	*	0425	A
5222	*	0510	A
5222	*	0595	A
5222	*	0680	A
5222	*	0765	A

Series	Material	Width	Version
5222	*	0850	A
5222	*	0935	A
5222	*	1020	A
5222	*	1105	A
5222	*	1190	A
5222	*	1275	A
5222	*	1360	A
5222	*	1445	A
5222	*	1530	A

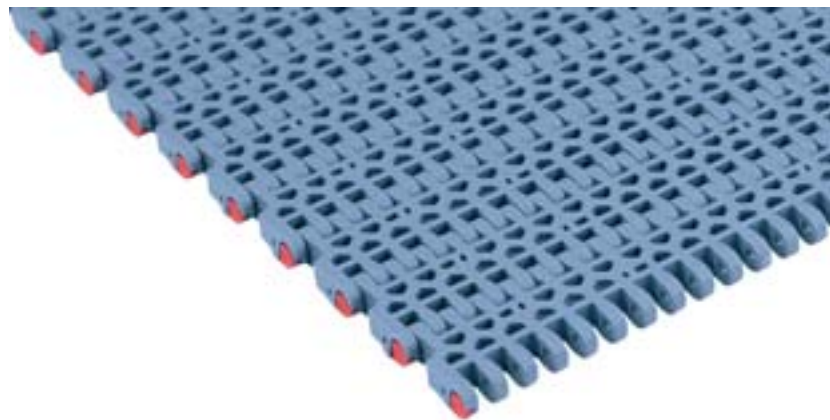

VERSION A - STANDARD

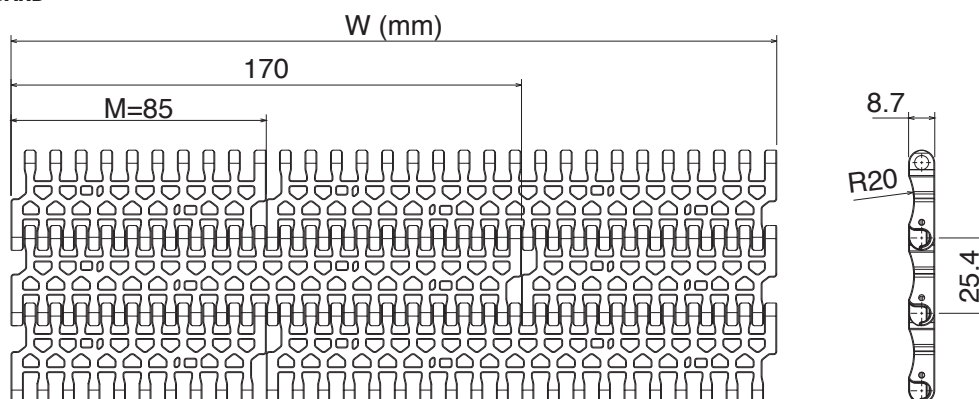

* Material

01 LFA - Acetal Resin



Max working load: 27500 N/m

Weight: 7,0 kg/m

Temperature range:

dry -40÷80 °C

wet -40÷65 °C

Pin material: PBT white

03 MX - PBT



Max working load: 22000 N/m

Weight: 6,7 kg/m

Temperature range:


dry -40÷120 °C

wet -40÷60 °C


Pin material: POM grey

Also available, on request,
other materials and widths

VERSION B - WITH 1 POSITIONER

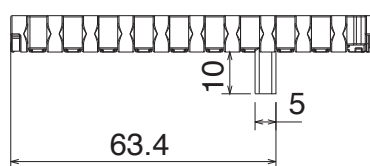

VERSION C - WITH 2 POSITIONERS

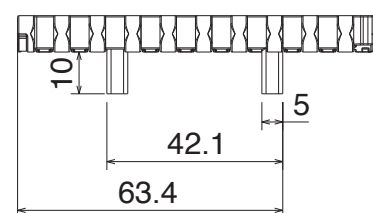

Series	Material	Width	Version
5222	*	0085	B
5222	*	0170	B
5222	*	0255	B
5222	*	0340	B
5222	*	0425	B
5222	*	0510	B
5222	*	0595	B
5222	*	0680	B
5222	*	0765	B

Series	Material	Width	Version
5222	*	0850	B
5222	*	0935	B
5222	*	1020	B
5222	*	1105	B
5222	*	1190	B
5222	*	1275	B
5222	*	1360	B
5222	*	1445	B
5222	*	1530	B

Series	Material	Width	Version
5222	*	0085	C
5222	*	0170	C
5222	*	0255	C
5222	*	0340	C
5222	*	0425	C
5222	*	0510	C
5222	*	0595	C
5222	*	0680	C
5222	*	0765	C

Series	Material	Width	Version
5222	*	0850	C
5222	*	0935	C
5222	*	1020	C
5222	*	1105	C
5222	*	1190	C
5222	*	1275	C
5222	*	1360	C
5222	*	1445	C
5222	*	1530	C




Tappeto Modulare 551 FT, H=12,7 M=85 / Modular Belt Series 551 FT, H=12,7 M=85 / Modulare Mattenkette 551 FT, H=12,7 M=85

Series	Material	Width	Version
5231	*	0085	A
5231	*	0170	A
5231	*	0255	A
5231	*	0340	A
5231	*	0425	A
5231	*	0510	A
5231	*	0595	A
5231	*	0680	A
5231	*	0765	A

Series	Material	Width	Version
5231	*	0850	A
5231	*	0935	A
5231	*	1020	A
5231	*	1105	A
5231	*	1190	A
5231	*	1275	A
5231	*	1360	A
5231	*	1445	A
5231	*	1530	A



VERSION A - STANDARD

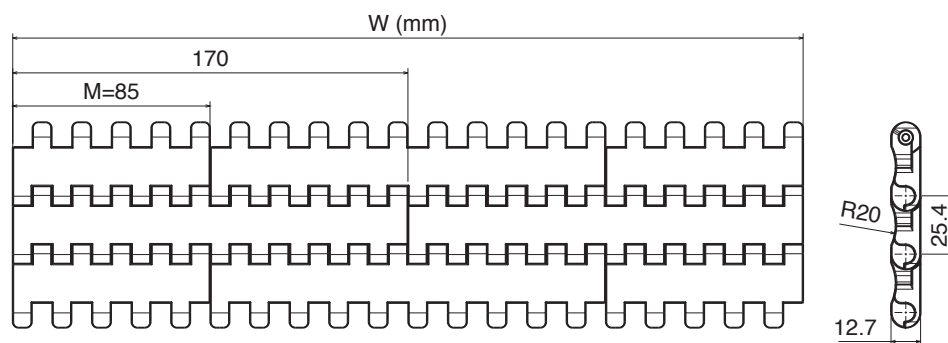

* Material

01 LFA - Acetal Resin


Max working load: 41500 N/m
 Weight: 12,5 kg/m
 Temperature range:
 dry -40÷80 °C
 wet 0÷65 °C
 Pin material: PBT white

03 MX - PBT


Max working load: 33500 N/m
 Weight: 12,0 kg/m
 Temperature range:
 dry -40÷120 °C
 wet -40÷60 °C
 Pin material: POM grey

Also available, on request,
 other materials and widths

VERSION B - WITH 1 POSITIONER

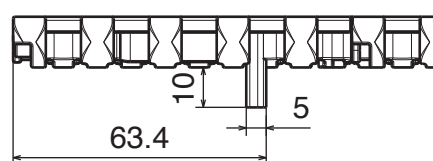

VERSION C - WITH 2 POSITIONERS

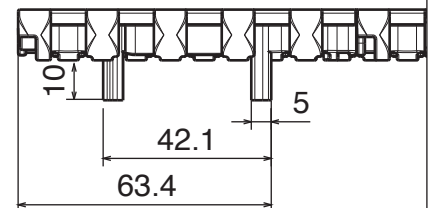

Series	Material	Width	Version
5231	*	0085	B
5231	*	0170	B
5231	*	0255	B
5231	*	0340	B
5231	*	0425	B
5231	*	0510	B
5231	*	0595	B
5231	*	0680	B
5231	*	0765	B

Series	Material	Width	Version
5231	*	0850	B
5231	*	0935	B
5231	*	1020	B
5231	*	1105	B
5231	*	1190	B
5231	*	1275	B
5231	*	1360	B
5231	*	1445	B
5231	*	1530	B

Series	Material	Width	Version
5231	*	0085	C
5231	*	0170	C
5231	*	0255	C
5231	*	0340	C
5231	*	0425	C
5231	*	0510	C
5231	*	0595	C
5231	*	0680	C
5231	*	0765	C


Series	Material	Width	Version
5231	*	0850	C
5231	*	0935	C
5231	*	1020	C
5231	*	1105	C
5231	*	1190	C
5231	*	1275	C
5231	*	1360	C
5231	*	1445	C
5231	*	1530	C




Tappeto Modulare 551 GT, H=12,7 M=85 / Modular Belt Series 551 GT, H=12,7 M=85 / Modulare Mattenkette 551 GT, H=12,7 M=85

Series	Material	Width	Version
5233	*	0085	A
5233	*	0170	A
5233	*	0255	A
5233	*	0340	A
5233	*	0425	A
5233	*	0510	A
5233	*	0595	A
5233	*	0680	A
5233	*	0765	A

Series	Material	Width	Version
5233	*	0850	A
5233	*	0935	A
5233	*	1020	A
5233	*	1105	A
5233	*	1190	A
5233	*	1275	A
5233	*	1360	A
5233	*	1445	A
5233	*	1530	A

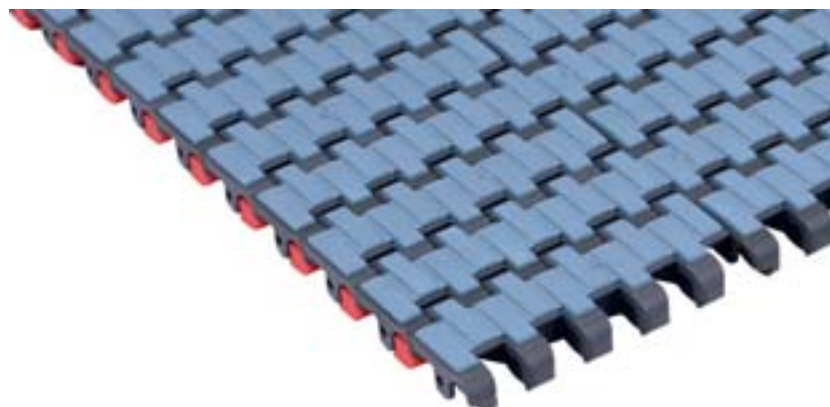

VERSION A - STANDARD

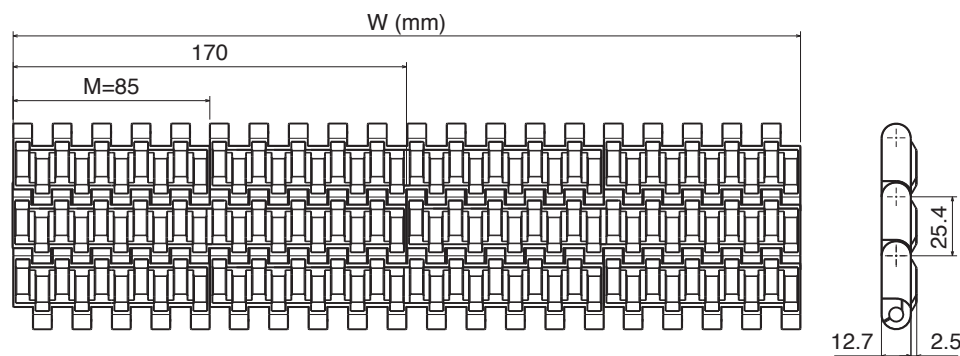

* Material

01 LFA - Acetal Resin



Max working load: 41500 N/m
Weight: 13,5 kg/m
Temp. range: dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white
Hardness: 75 ShA

02 PP - Polypropylene



Max working load: 27000 N/m
Weight: 11,00 kg/m
Temp. range: dry 4÷65 °C
wet 4÷65 °C
Pin material: PP blu
Hardness: 75 ShA


03 MX - PBT




Max working load: 33500 N/m
Weight: 12,7 kg/m
Temp. range: dry -40÷120 °C
wet -40÷60 °C
Pin material: POM grey
Hardness: 75 ShA

Also available, on request,
other materials and widths

VERSION B - WITH 1 POSITIONER

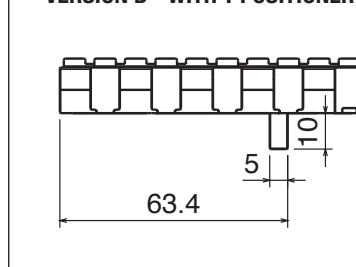

VERSION C - WITH 2 POSITIONERS

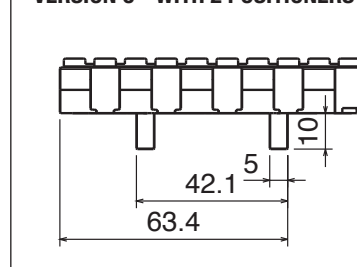

Series	Material	Width	Version
5233	*	0085	B
5233	*	0170	B
5233	*	0255	B
5233	*	0340	B
5233	*	0425	B
5233	*	0510	B
5233	*	0595	B
5233	*	0680	B
5233	*	0765	B

Series	Material	Width	Version
5233	*	0850	B
5233	*	0935	B
5233	*	1020	B
5233	*	1105	B
5233	*	1190	B
5233	*	1275	B
5233	*	1360	B
5233	*	1445	B
5233	*	1530	B

Series	Material	Width	Version
5233	*	0085	C
5233	*	0170	C
5233	*	0255	C
5233	*	0340	C
5233	*	0425	C
5233	*	0510	C
5233	*	0595	C
5233	*	0680	C
5233	*	0765	C

Series	Material	Width	Version
5233	*	0850	C
5233	*	0935	C
5233	*	1020	C
5233	*	1105	C
5233	*	1190	C
5233	*	1275	C
5233	*	1360	C
5233	*	1445	C
5233	*	1530	C




pg 100-101


Tappeto Modulare 551 LBP, H=12,7 M=85 / Modular Belt Series 551 LBP, H=12,7 M=85 / Modulare Mattenkette 551 LBP, H=12,7 M=85

Series	Material	Width	Version
5234	*	0085	A
5234	*	0170	A
5234	*	0255	A
5234	*	0340	A
5234	*	0425	A
5234	*	0510	A
5234	*	0595	A
5234	*	0680	A
5234	*	0765	A

Series	Material	Width	Version
5234	*	0850	A
5234	*	0935	A
5234	*	1020	A
5234	*	1105	A
5234	*	1190	A
5234	*	1275	A
5234	*	1360	A
5234	*	1445	A
5234	*	1530	A

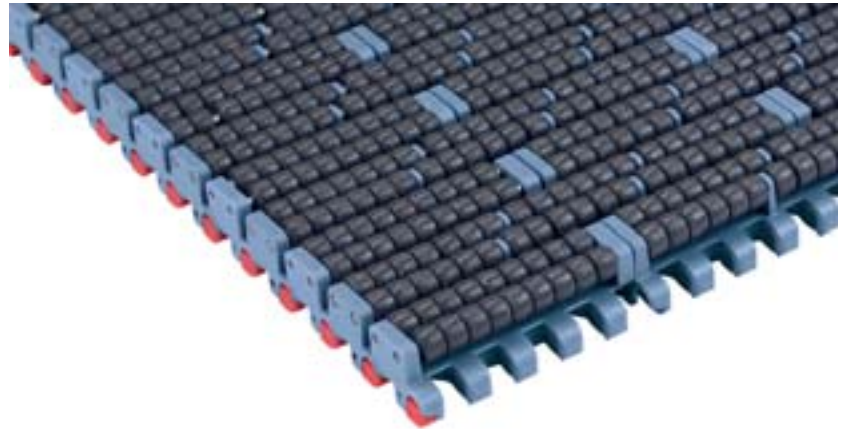

VERSION A - STANDARD

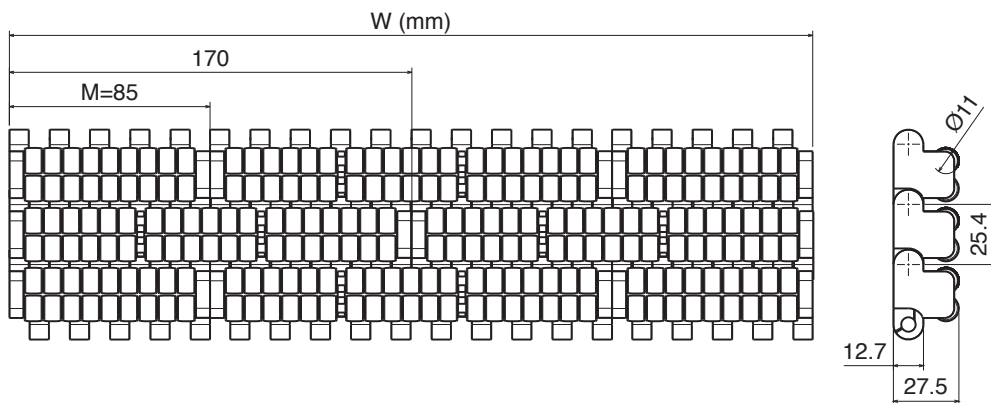

* Material

01 LFA - Acetal Resin



Max working load: 41500 N/m

Weight: 26,9 kg/m

Temperature range:


dry -40-80 °C

wet 1÷65 °C


Pin material: PBT white

Also available, on request,
other materials and widths

VERSION B - WITH 1 POSITIONER



VERSION C - WITH 2 POSITIONERS



Series	Material	Width	Version
5234	*	0085	B
5234	*	0170	B
5234	*	0255	B
5234	*	0340	B
5234	*	0425	B
5234	*	0510	B
5234	*	0595	B
5234	*	0680	B
5234	*	0765	B

Series	Material	Width	Version
5234	*	0850	B
5234	*	0935	B
5234	*	1020	B
5234	*	1105	B
5234	*	1190	B
5234	*	1275	B
5234	*	1360	B
5234	*	1445	B
5234	*	1530	B

Series	Material	Width	Version
5234	*	0085	C
5234	*	0170	C
5234	*	0255	C
5234	*	0340	C
5234	*	0425	C
5234	*	0510	C
5234	*	0595	C
5234	*	0680	C
5234	*	0765	C

Series	Material	Width	Version
5234	*	0850	C
5234	*	0935	C
5234	*	1020	C
5234	*	1105	C
5234	*	1190	C
5234	*	1275	C
5234	*	1360	C
5234	*	1445	C
5234	*	1530	C



pg 100-101

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=85 / Side Flex Modular Belt Series 600, H=12,7 M=85 / Kurvengängige Mattenkette Serie 600, H=12,7 M=85

* Material


01 LFA - Acetal Resin

Max working load:
straight 30000N/m
curve 2500N
Weight: 7,7 kg/m
Temperature range:
dry -40÷80 °C
wet 1÷65 °C
Pin material: POM grey



03 MX - PBT

Max working load:
straight 24000N/m
curve 2000N
Weight: 7,5 kg/m
Temperature range:
dry -40÷120 °C
wet -40÷60 °C
Pin material: POM grey

Also available, on request,
other materials and widths

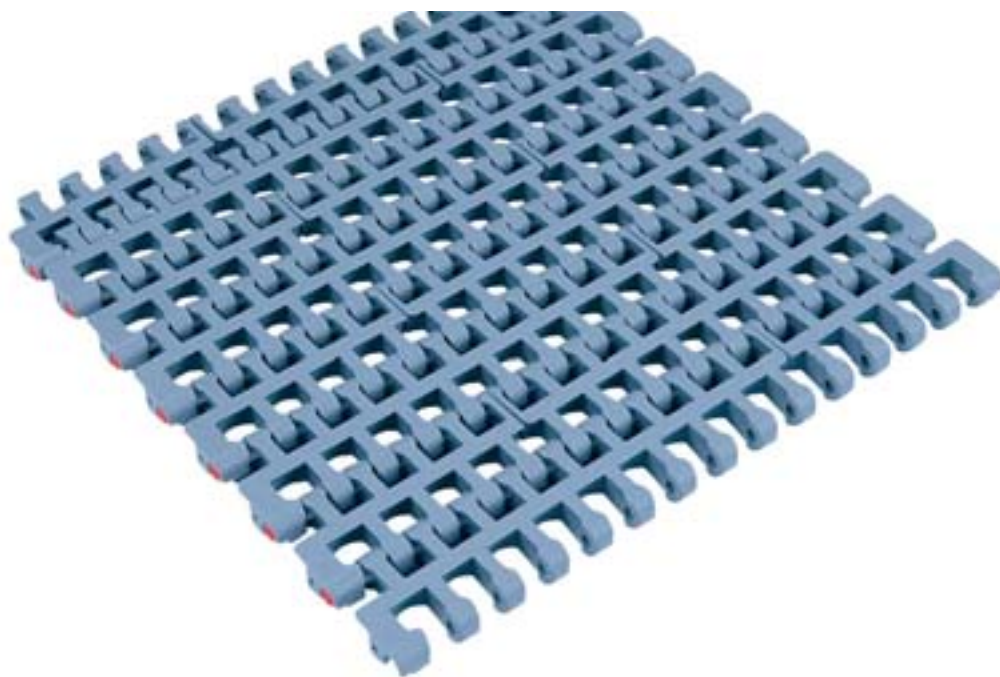

W (mm)

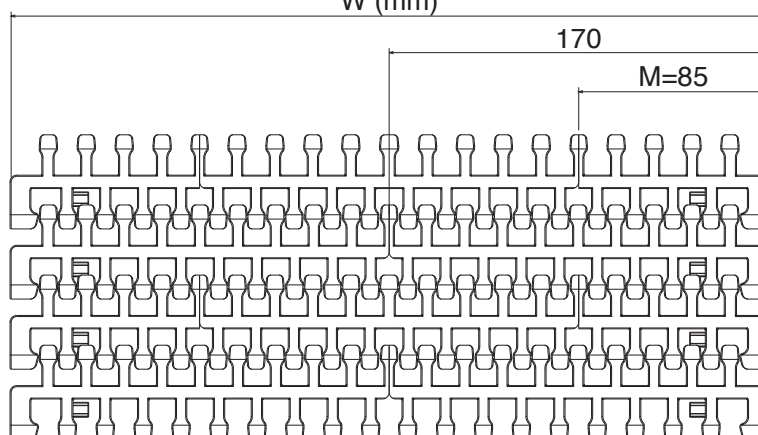

pg 104

STANDARD**TAB****REVERSE TAB****TrT
(TAB reverse TAB)**

Series	Material	Width	Version	min radius
5421	*	0255	A	408
5421	*	0340	A	545
5421	*	0425	A	680
5421	*	0510	A	840
5421	*	0595	A	980
5421	*	0680	A	1150
5421	*	0765	A	1300
5421	*	0850	A	1450

Series	Material	Width	Version	min radius
5421	*	0255	B	408
5421	*	0340	B	545
5421	*	0425	B	680
5421	*	0510	B	840
5421	*	0595	B	980
5421	*	0680	B	1150
5421	*	0765	B	1300
5421	*	0850	B	1450

Series	Material	Width	Version	min radius
5421	*	0255	C	408
5421	*	0340	C	545
5421	*	0425	C	680
5421	*	0510	C	840
5421	*	0595	C	980
5421	*	0680	C	1150
5421	*	0765	C	1300
5421	*	0850	C	1450

Series	Material	Width	Version	min radius
5421	*	0255	D	408
5421	*	0340	D	545
5421	*	0425	D	680
5421	*	0510	D	840
5421	*	0595	D	980
5421	*	0680	D	1150
5421	*	0765	D	1300
5421	*	0850	D	1450

Raised Rib Belt Series 500 RR

Series	Material	Width
1348	*	0060
1348	*	0063
1348	*	0066
1348	*	0069
1348	*	0072
1348	*	0075
1348	*	0078
1348	*	0081
1348	*	0084
1348	*	0087
1348	*	0090
1348	*	0093
1348	*	0096
1348	*	0099
1348	*	0102
1348	*	0105
1348	*	0108
1348	*	0111
1348	*	0114
1348	*	0117
1348	*	0120



* Material

02 PP - Polypropylene



Max working load: 30000 N/m
Weight: 10,65 kg/m
Temperature range: 4÷104° C
Pin material: PP grey



11 PPX - Polypropylene



Max working load: 30000 N/m
Weight: 10,65 kg/m
Temperature range: 4÷104° C
Pin material: PP grey

Also available, on request,
other materials and widths


W (inch)

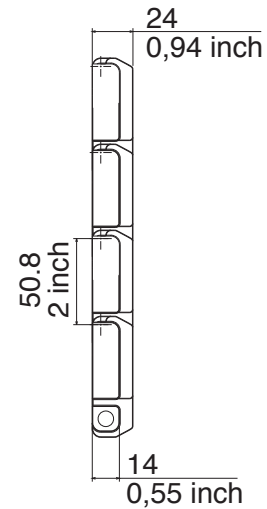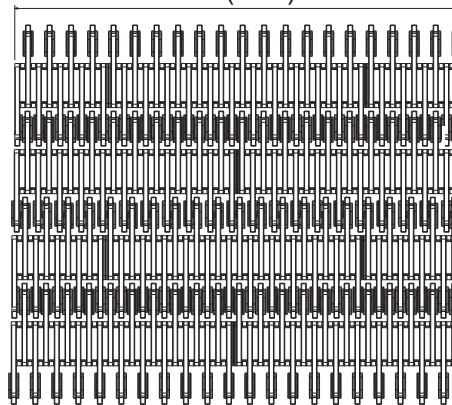

pg 105

Pettine / Combs / Fingerplatte


Part	Article-Nr.	A
389	38901	152
389	38902	190

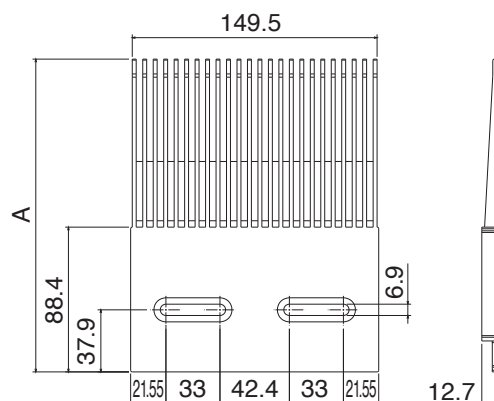



Catena curvilinea magnetica / Sideflexing magnetic belt/chain / Kurvengängige Magnetische Mattenkette

Part	Article-Nr.	Ref.
1151	11510103	K330

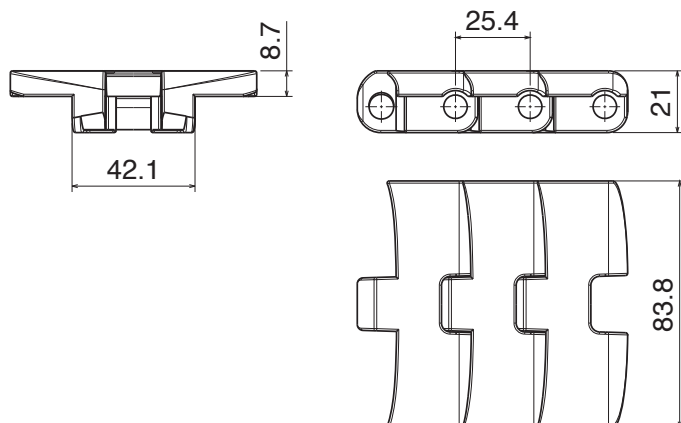

* Material

01 LFA - Acetal Resin



Max working load: 2000 N/m
Weight: 1,75 kg/m
Sideflex radius: 500 mm
Pin material: Ferritic SS

03 MX - PBT




Max working load: 1600 N/m
Weight: 1,70 kg/m
Sideflex radius: 500 mm
Pin material: Ferritic SS

Also available, on request,
other materials and widths



Catena curvilinea / Sideflexing belt/chain / Kurvengängige Mattenkette

Part	Article-Nr.	Ref.
1152	11520103	K330

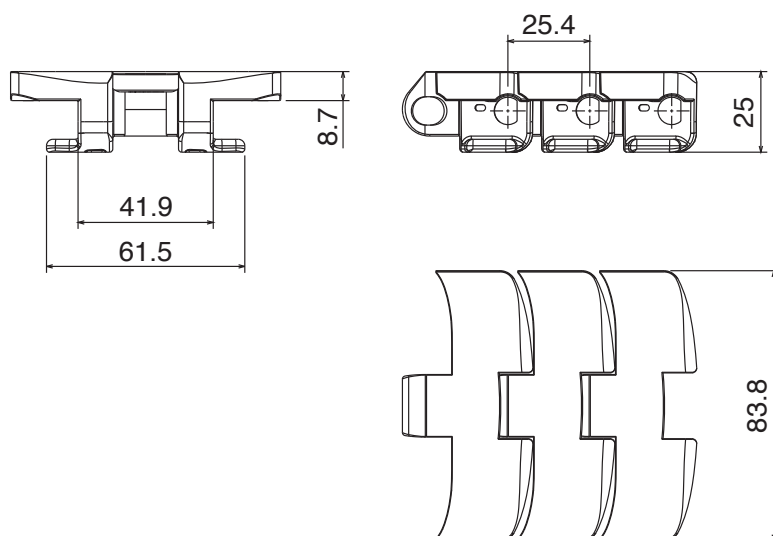

* Material

01 LFA - Acetal Resin



Max working load: 2000 N/m
Weight: 1,85 kg/m
Sideflex radius: 500 mm
Pin material: Martensitic SS

03 MX - PBT





Max working load: 1600 N/m
Weight: 1,80 kg/m
Sideflex radius: 500 mm
Pin material: Martensitic SS

Also available, on request,
other materials and widths




belt sprockets

 Series 520 pag. 94	 Series 520 pag. 94	 Series 520 pag. 95	 Series 520 pag. 95	 Series 521 pag. 96	 Series 521 pag. 96
 Series 590 pag. 97	 Series 590 pag. 97	 Series 550 pag. 98	 Series 550 pag. 98	 Series 550 pag. 99	 Series 550 pag. 99
 Series 551 pag. 100	 Series 551 pag. 100	 Series 551 pag. 101	 Series 551 pag. 101	 Series 260M-260TAB pag. 102	
	 Series 260M-260TAB pag. 102	 Series 250M-251M pag. 103	 Series 250M-251M pag. 103	 Series 600 pag. 104	
			 Series 600 pag. 104	 Series 500RR pag. 105	

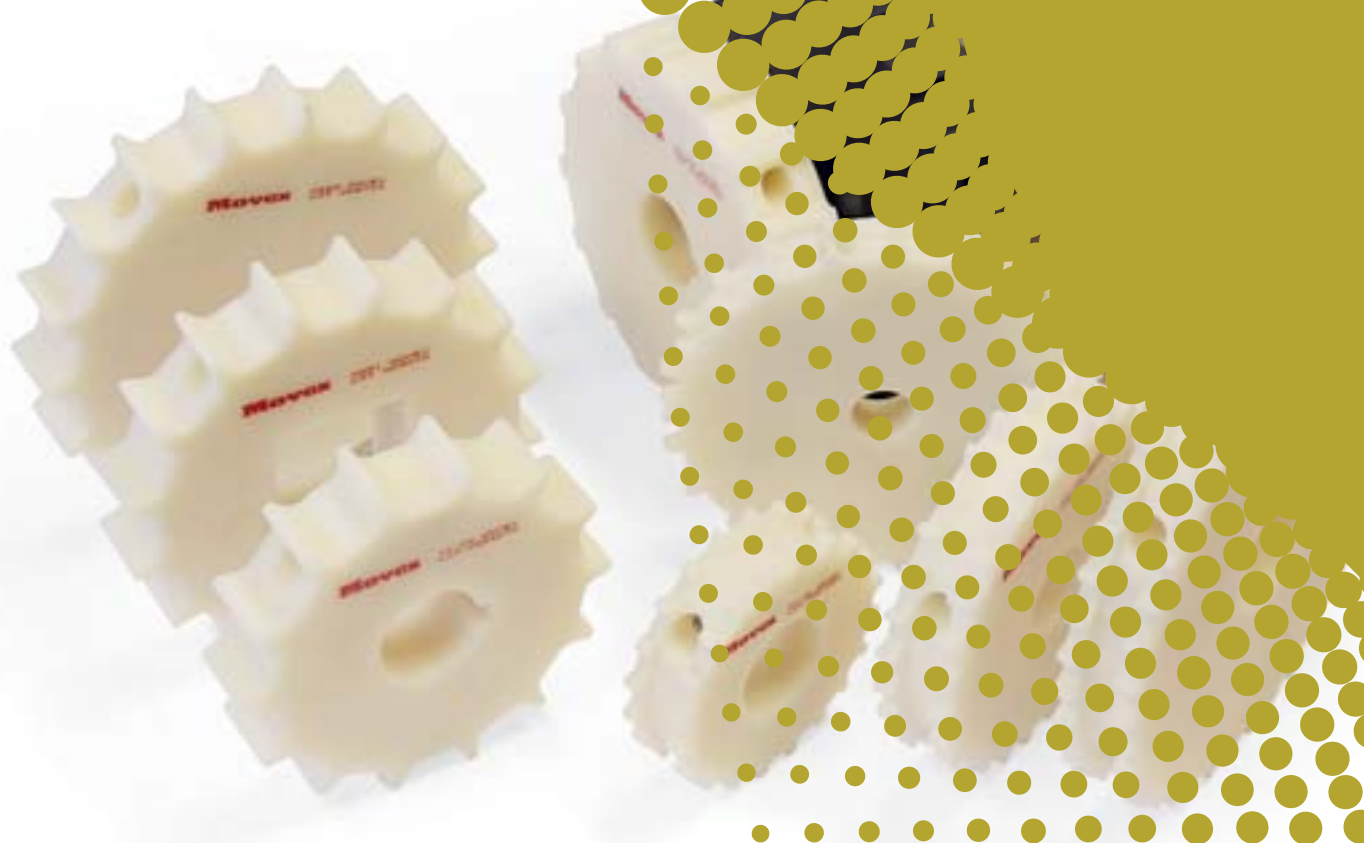


Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl

Ruota traino divisa, fresata / Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

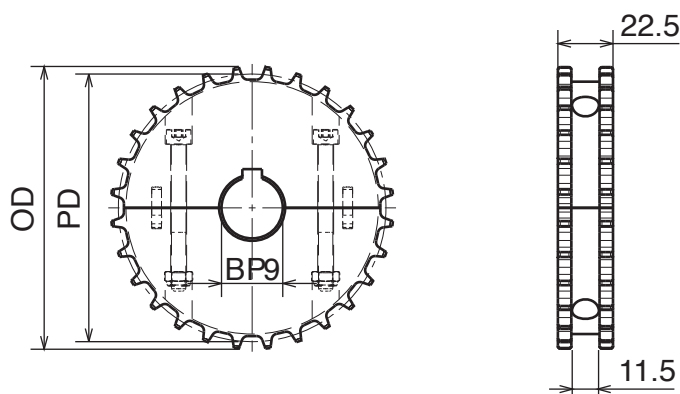

Part	Article-Nr.	z-	Bore	PD	OD
1501	150101	28	25	113,4	115,4
1501	150102		30		
1501	150103		35		
1501	150104		40		
1501	150106		25*25		
1501	150107		30*30		
1501	150108		40*40		
1502	150201	36	25	145,7	147,7
1502	150202		30		
1502	150203		35		
1502	150204		40		
1502	150206		25*25		
1502	150207		30*30		
1502	150208		40*40		
1503	150301	38	25	153,8	155,8
1503	150302		30		
1503	150303		35		
1503	150304		40		
1503	150306		25*25		
1503	150307		30*30		
1503	150308		40*40		
1504	150401	40	25	161,9	163,8
1504	150402		30		
1504	150403		35		
1504	150404		40		
1504	150406		25*25		
1504	150407		30*30		
1504	150408		40*40		

Ruota rinvio divisa, fresata / Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

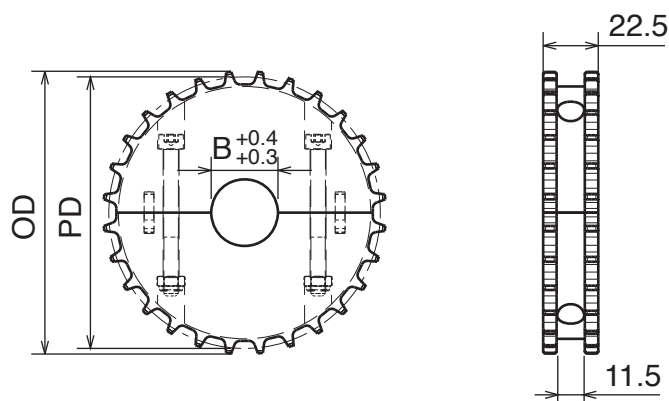


Part	Article-Nr.	z-	Bore	PD	OD
1501	150150	28	18*	113,4	115,4
1501	150151		25		
1501	150152		30		
1501	150153		35		
1501	150154		40		
1502	150250	36	18*	145,7	147,7
1502	150251		25		
1502	150252		30		
1502	150253		35		
1502	150254		40		
1503	150350	38	18*	153,8	155,8
1503	150351		25		
1503	150352		30		
1503	150353		35		
1503	150354		40		
1504	150450	40	18*	161,9	163,8
1504	150451		25		
1504	150452		30		
1504	150453		35		
1504	150454		40		

Materiale:	Material:	Materialien:
Poliammide rinforzato	Polyamide reinforced	Verstärktes Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ottone nichelato	Nuts: nickel plated brass	Mutter: messing vernickelt


Ruota traino divisa, stampata / Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

Part	Article-Nr.	z-	Bore	PD	OD
1505	150501	24	25	97,3	99,3
1505	150502		30		
1505	150503		35		
1505	150504		40		
1505	150506		25*25		
1505	150507		30*30		
1505	150508		40*40		
1506	150601	28	25	113,4	115,4
1506	150602		30		
1506	150603		35		
1506	150604		40		
1506	150606		25*25		
1506	150607		30*30		
1506	150608		40*40		
1507	150701	36	25	145,7	147,7
1507	150702		30		
1507	150703		35		
1507	150704		40		
1507	150706		25*25		
1507	150707		30*30		
1507	150708		40*40		

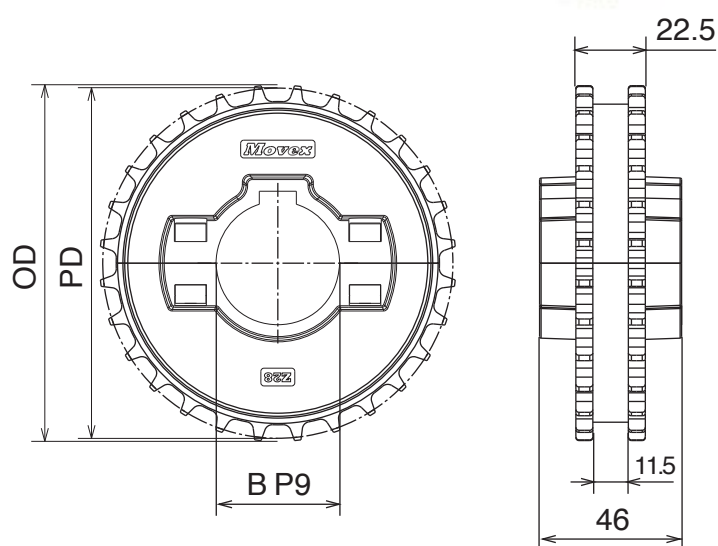

Ruota rinvio divisa, stampata / Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt


Part	Article-Nr.	z-	Bore	PD	OD
1505	150551	24	25	97,3	99,3
1505	150552		30		
1505	150553		35		
1505	150554		40		
1506	150651	28	25	113,4	115,4
1506	150652		30		
1506	150653		35		
1506	150654		40		
1507	150751	36	25	145,7	147,7
1507	150752		30		
1507	150753		35		
1507	150754		40		

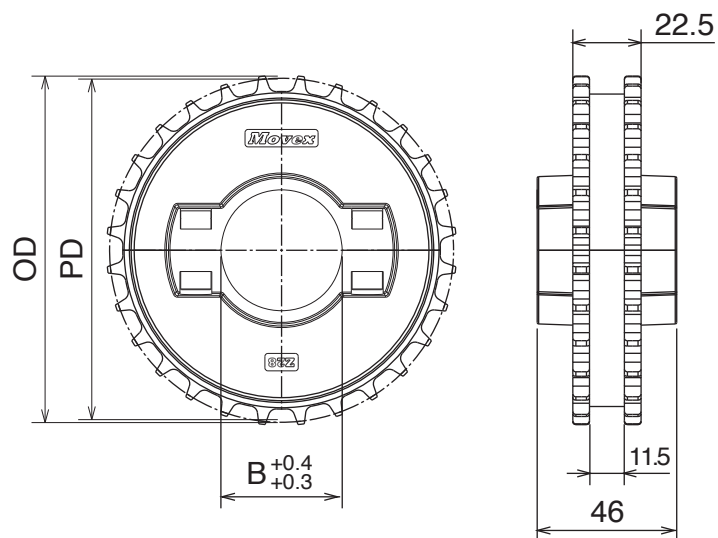

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl




Ruota traino divisa, fresata / Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

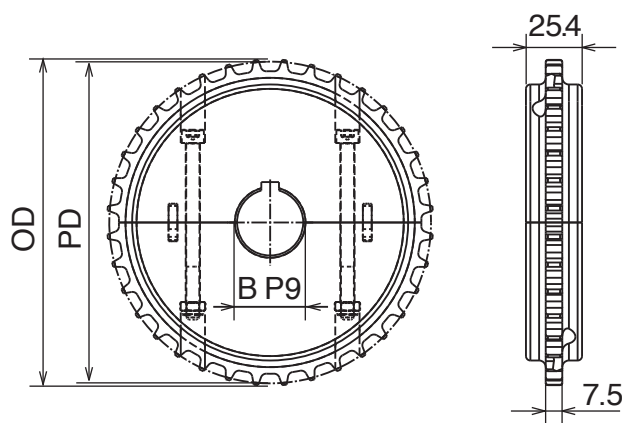

Part	Article-Nr.	z-	Bore	PD	OD
1561	156101	28	25	113,4	115,4
1561	156102	30			
1561	156103	35			
1561	156104	40			
1561	156106	25*25			
1561	156107	30*30			
1561	156108	40*40			
1562	156201	36	25	145,7	147,7
1562	156202	30			
1562	156203	35			
1562	156204	40			
1562	156206	25*25			
1562	156207	30*30			
1562	156208	40*40			
1563	156301	38	25	153,8	155,8
1563	156302	30			
1563	156303	35			
1563	156304	40			
1563	156306	25*25			
1563	156307	30*30			
1563	156308	40*40			
1564	156401	40	25	161,9	163,8
1564	156402	30			
1564	156403	35			
1564	156404	40			
1564	156406	25*25			
1564	156407	30*30			
1564	156408	40*40			



Ruota rinvio divisa, fresata / Split idler sprocket, machined / geteiltes Umlenkrad, gefräst


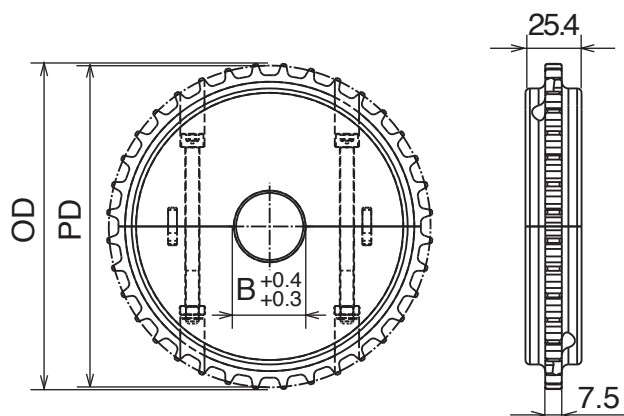


Part	Article-Nr.	z-	Bore	PD	OD
1561	156150	28	18*	113,4	115,4
1561	156151	25			
1561	156152	30			
1561	156153	35			
1561	156154	40			
1562	156250	36	18*	145,7	147,7
1562	156251	25			
1562	156252	30			
1562	156253	35			
1562	156254	40			
1563	156350	38	18*	153,8	155,8
1563	156351	25			
1563	156352	30			
1563	156353	35			
1563	156354	40			
1564	156450	40	18*	161,9	163,8
1564	156451	25			
1564	156452	30			
1564	156453	35			
1564	156454	40			

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl



Ruota traino divisa, fresata / Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

Part	Article-Nr.	z-	Bore	PD	OD
1511	151101	17	25	100,7	103,4
1511	151102		30		
1511	151103		35		
1511	151104		40		
1511	151106		25*25		
1511	151107		30*30		
1511	151108		40*40		
1512	151201	21	25	126	128,7
1512	151202		30		
1512	151203		35		
1512	151204		40		
1512	151206		25*25		
1512	151207		30*30		
1512	151208		40*40		
1513	151301	24	25	142,9	145,6
1513	151302		30		
1513	151303		35		
1513	151304		40		
1513	151306		25*25		
1513	151307		30*30		
1513	151308		40*40		
1514	151401	25	25	149	151,7
1514	151402		30		
1514	151403		35		
1514	151404		40		
1514	151406		25*25		
1514	151407		30*30		
1514	151408		40*40		

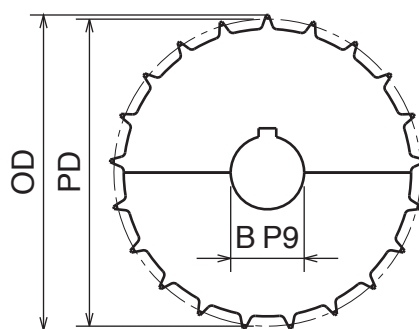

Ruota rinvio divisa, fresata / Split idler sprocket, machined / geteiltes Umlenkrad, gefräst


Part	Article-Nr.	z-	Bore	PD	OD
1511	151150	17	18*	100,7	103,4
1511	151151		25		
1511	151152		30		
1511	151153		35		
1511	151154		40		
1512	151250	21	18*	126	128,7
1512	151251		25		
1512	151252		30		
1512	151253		35		
1512	151254		40		
1513	151350	24	18*	142,9	145,6
1513	151351		25		
1513	151352		30		
1513	151353		35		
1513	151354		40		
1514	151450	25	18*	149	151,7
1514	151451		25		
1514	151452		30		
1514	151453		35		
1514	151454		40		

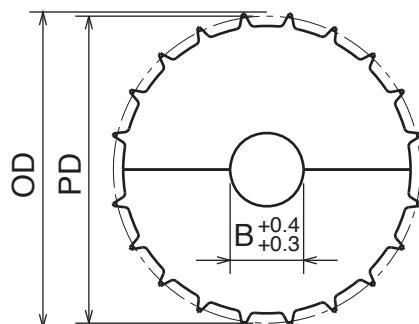

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl




Ruota traino divisa, fresata / Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

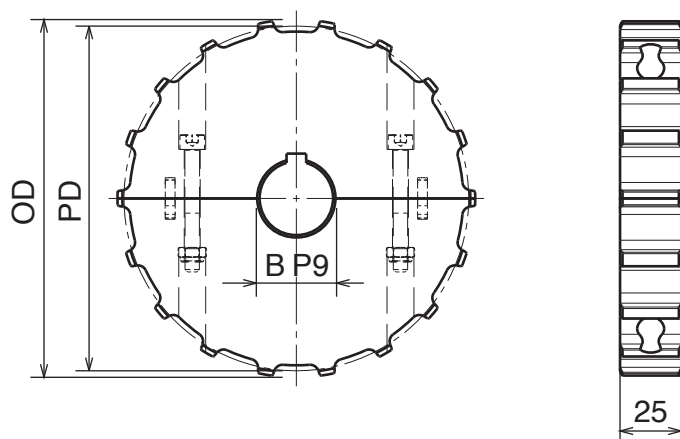

Part	Article-Nr.	z-	Bore	PD	OD
1521	152101	14	25	114,1	114
1521	152102		30		
1521	152103		35		
1521	152104		40		
1521	152106		25*25		
1521	152107		30*30		
1521	152108		40*40		
1522	152201	16	25	130,2	130
1522	152202		30		
1522	152203		35		
1522	152204		40		
1522	152206		25*25		
1522	152207		30*30		
1522	152208		40*40		
1523	152301	18	25	146,3	146
1523	152302		30		
1523	152303		35		
1523	152304		40		
1523	152306		25*25		
1523	152307		30*30		
1523	152308		40*40		
1524	152401	20	25	162,4	162
1524	152402		30		
1524	152403		35		
1524	152404		40		
1524	152406		25*25		
1524	152407		30*30		
1524	152408		40*40		



Ruota rinvio divisa, fresata / Split idler sprocket, machined / geteiltes Umlenkrad, gefräst


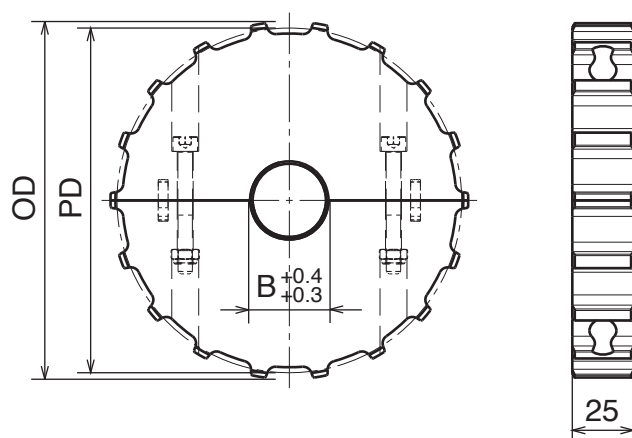


Part	Article-Nr.	z-	Bore	PD	OD
1521	152150	14	18*	114,1	114
1521	152151		25		
1521	152152		30		
1521	152153		35		
1521	152154		40		
1522	152250	16	18*	130,2	130
1522	152251		25		
1522	152252		30		
1522	152253		35		
1522	152254		40		
1523	152350	18	18*	146,3	146
1523	152351		25		
1523	152352		30		
1523	152353		35		
1523	152354		40		
1524	152450	20	18*	162,4	162
1524	152451		25		
1524	152452		30		
1524	152453		35		
1524	152454		40		

Materiale:	Material:	Materialien:
Poliammide rinforzato	Polyamide reinforced	Verstärktes Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ottone nichelato	Nuts: nickel plated brass	Mutter: messing vernickelt



Ruota traino divisa, stampata / Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

Part	Article-Nr.	z-	Bore	PD	OD
1525	152501	14	25	114,1	114
1525	152502		30		
1525	152503		35		
1525	152504		40		
1525	152506		25*25		
1525	152507		30*30		
1525	152508		40*40		
1526	152601	16	25	130,2	130
1526	152602		30		
1526	152603		35		
1526	152604		40		
1526	152606		25*25		
1526	152607		30*30		
1526	152608		40*40		
1527	152701	18	25	146,3	146
1527	152702		30		
1527	152703		35		
1527	152704		40		
1527	152706		25*25		
1527	152707		30*30		
1527	152708		40*40		
1528	152801	20	25	162,4	162
1528	152802		30		
1528	152803		35		
1528	152804		40		
1528	152806		25*25		
1528	152807		30*30		
1528	152808		40*40		

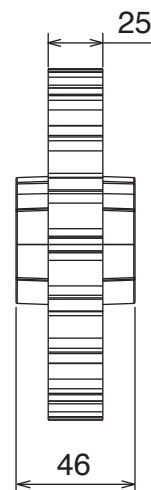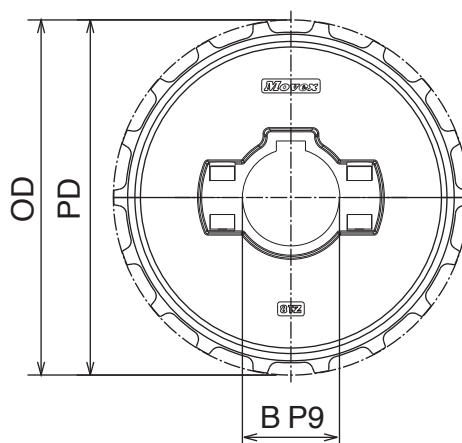

Ruota rinvio divisa, stampata / Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt


Part	Article-Nr.	z-	Bore	PD	OD
1525	152551	14	25	114,1	114
1525	152552		30		
1525	152553		35		
1525	152554		40		
1526	152651	16	25	130,2	130
1526	152652		30		
1526	152653		35		
1526	152654		40		
1527	152751	18	25	146,3	146
1527	152752		30		
1527	152753		35		
1527	152754		40		
1528	152851	20	25	162,4	162
1528	152852		30		
1528	152853		35		
1528	152854		40		

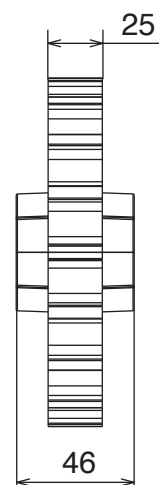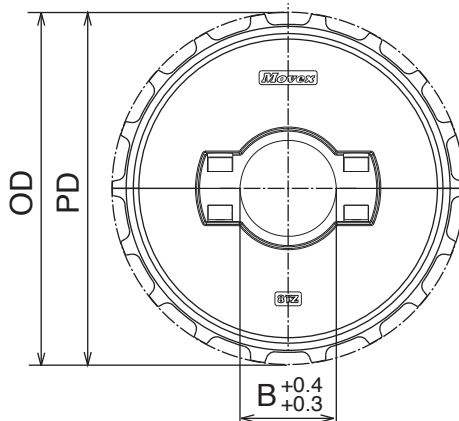

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl




Ruota traino divisa, fresata / Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

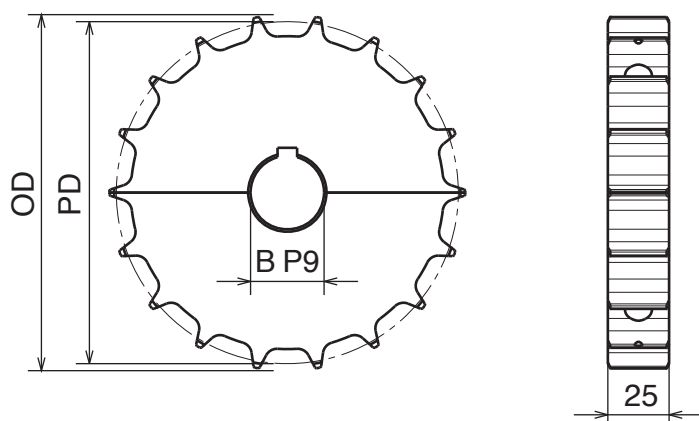

Part	Article-Nr.	z-	Bore	PD	OD
1531	153101	14	25	114,2	113,5
1531	153102		30		
1531	153103		35		
1531	153104		40		
1531	153106		25*25		
1531	153107		30*30		
1531	153108		40*40		
1532	153201	16	25	130,2	129
1532	153202		30		
1532	153203		35		
1532	153204		40		
1532	153206		25*25		
1532	153207		30*30		
1532	153208		40*40		
1533	153301	18	25	146,3	145,3
1533	153302		30		
1533	153303		35		
1533	153304		40		
1533	153306		25*25		
1533	153307		30*30		
1533	153308		40*40		
1534	153401	20	25	162,4	161,7
1534	153402		30		
1534	153403		35		
1534	153404		40		
1534	153406		25*25		
1534	153407		30*30		
1534	153408		40*40		



Ruota rinvio divisa, fresata / Split idler sprocket, machined / geteiltes Umlenkrad, gefräst


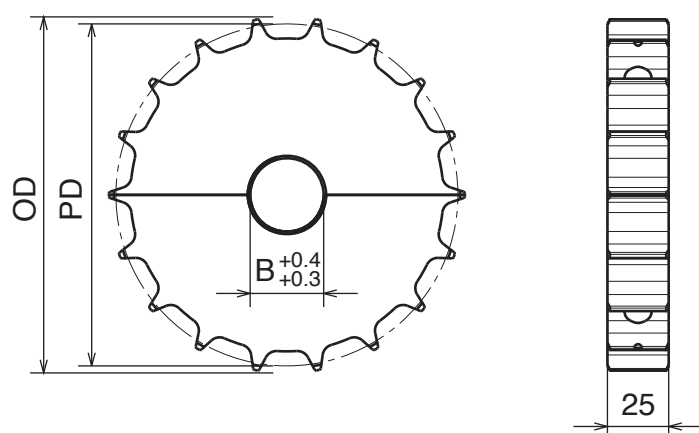


Part	Article-Nr.	z-	Bore	PD	OD
1531	153150	14	18*	114,2	114
1531	153151		25		
1531	153152		30		
1531	153153		35		
1531	153154		40		
1532	153250	16	18*	130,2	129
1532	153251		25		
1532	153252		30		
1532	153253		35		
1532	153254		40		
1533	153350	18	18*	146,3	145,3
1533	153351		25		
1533	153352		30		
1533	153353		35		
1533	153354		40		
1534	153450	20	18*	162,4	161,7
1534	153451		25		
1534	153452		30		
1534	153453		35		
1534	153454		40		

Materiale:	Material:	Materialien:
Poliammide rinforzato	Polyamide reinforced	Verstärktes Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ottone nichelato	Nuts: nickel plated brass	Mutter: messing vernickelt



Ruota traino divisa, stampata / Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

Part	Article-Nr.	z-	Bore	PD	OD
1535	153501	14	25	114,2	114
1535	153502		30		
1535	153503		35		
1535	153504		40		
1535	153506		25*25		
1535	153507		30*30		
1535	153508		40*40		
1536	153601	16	25	130,2	129
1536	153602		30		
1536	153603		35		
1536	153604		40		
1536	153606		25*25		
1536	153607		30*30		
1536	153608		40*40		
1537	153701	18	25	146,3	145,3
1537	153702		30		
1537	153703		35		
1537	153704		40		
1537	153706		25*25		
1537	153707		30*30		
1537	153708		40*40		
1538	153801	20	25	162,4	161,7
1538	153802		30		
1538	153803		35		
1538	153804		40		
1538	153806		25*25		
1538	153807		30*30		
1538	153808		40*40		

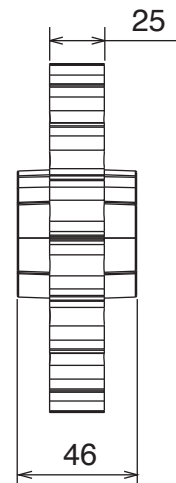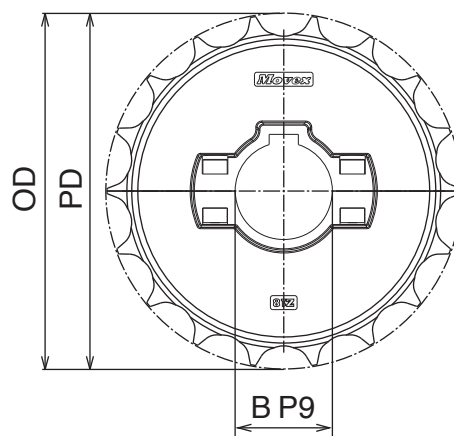

Ruota rinvio divisa, stampata / Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt

Part	Article-Nr.	z-	Bore	PD	OD
1535	153551	14	25	114,2	114
1535	153552		30		
1535	153553		35		
1535	153554		40		
1536	153651	16	25	130,2	129
1536	153652		30		
1536	153653		35		
1536	153654		40		
1537	153751	18	25	146,3	145,3
1537	153752		30		
1537	153753		35		
1537	153754		40		
1538	153851	20	25	162,4	161,7
1538	153852		30		
1538	153853		35		
1538	153854		40		

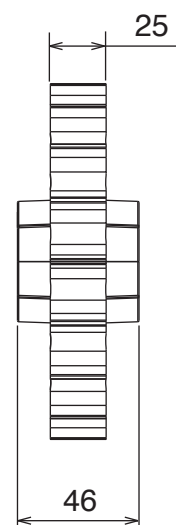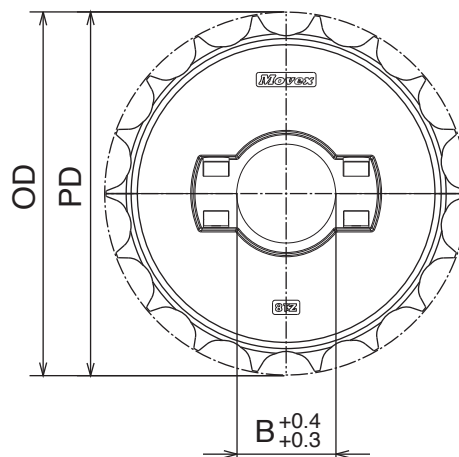



260M-260TAB

Ruote Fresate
Machined Sprockets
Gefräste Kettenräder

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl





Ruota traino divisa, fresata / Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

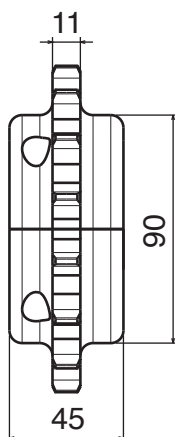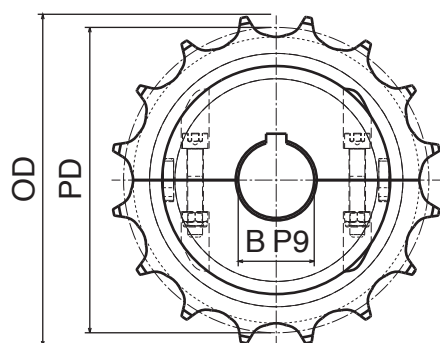

Part	Article-Nr.	z-	Bore	PD	OD
1541	154101	16	25	128,9	130,9
1541	154102		30		
1541	154103		35		
1541	154104		40		
1542	154201	18	25	144,8	146,8
1542	154202		30		
1542	154203		35		
1542	154204		40		
1543	154301	19	25	154,3	156,3
1543	154302		30		
1543	154303		35		
1543	154304		40		



Ruota rinvio divisa, fresata / Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

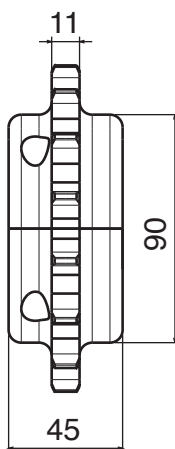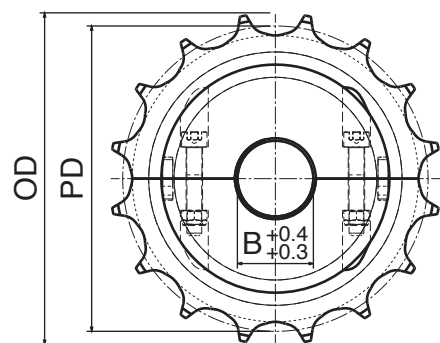


Part	Article-Nr.	z-	Bore	PD	OD
1541	154150	16	18*	128,9	130,9
1541	154151		25		
1541	154152		30		
1541	154153		35		
1541	154154		40		
1542	154250	18	18*	144,8	146,8
1542	154251		25		
1542	154252		30		
1542	154253		35		
1542	154254		40		
1543	154350	19	18*	154,3	156,3
1543	154351		25		
1543	154352		30		
1543	154353		35		
1543	154354		40		

Materiale:	Material:	Materialien:
Poliammide rinforzato	Polyamide reinforced	Verstärktes Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ottone nichelato	Nuts: nickel plated brass	Mutter: Messing vernickelt


Ruota traino divisa, stampata / Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

Part	Article-Nr.	z-	Bore	PD	OD
1545	154501	16	25	128,9	130,9
1545	154502		30		
1545	154503		35		
1545	154504		40		
1545	154506		25*25		
1545	154507		30*30		
1545	154508		40*40		
1546	154601	18	25	144,8	146,8
1546	154602		30		
1546	154603		35		
1546	154604		40		
1546	154606		25*25		
1546	154607		30*30		
1546	154608		40*40		
1547	154701	19	25	154,3	156,3
1547	154702		30		
1547	154703		35		
1547	154704		40		
1547	154706		25*25		
1547	154707		30*30		
1547	154708		40*40		

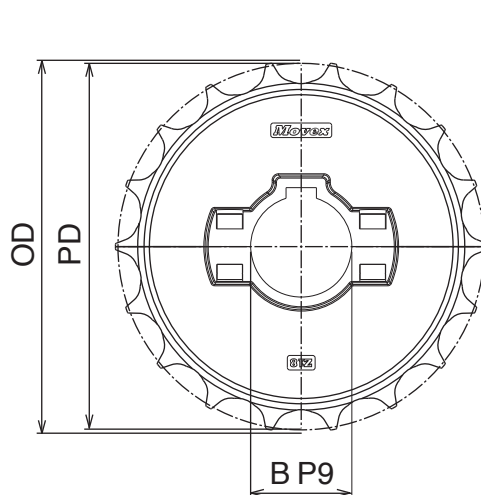

Ruota rinvio divisa, stampata / Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt



Part	Article-Nr.	z-	Bore	PD	OD
1545	154551	16	25	128,9	130,9
1545	154552		30		
1545	154553		35		
1545	154554		40		
1546	154651	18	25	144,8	146,8
1546	154652		30		
1546	154653		35		
1546	154654		40		
1547	154751	19	25	154,3	156,3
1547	154752		30		
1547	154753		35		
1547	154754		40		

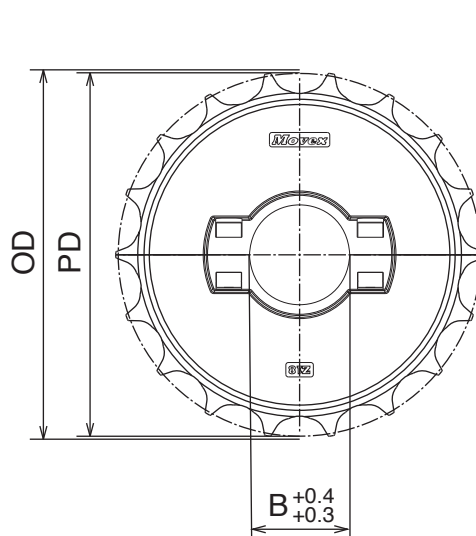

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid
Viti: Acciaio inox	Screws: Stainless steel	Schrauben: Edelstahl
Dadi: ferro zincato	Nuts: zinc plated steel	Mutter: verzinkter Stahl





Ruota traino divisa, fresata / Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

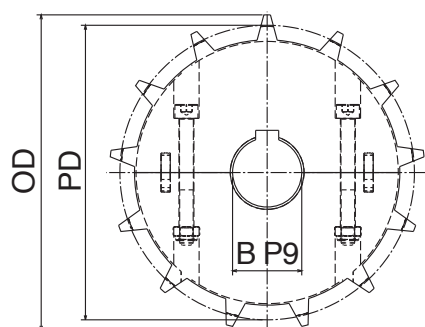

Part	Article-Nr.	z-	Bore	PD	OD
1571	157101	10	25	102,8	107,7
1571	157102		30		
1571	157103		35		
1571	157104		40		
1572	157201	13	25	132,7	138,8
1572	157202		30		
1572	157203		35		
1572	157204		40		
1573	157301	15	25	152,7	159,4
1573	157302		30		
1573	157303		35		
1573	157304		40		
1574	157401	16	25	162,8	169,6
1574	157402		30		
1574	157403		35		
1574	157404		40		



Ruota rinvio divisa, fresata / Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

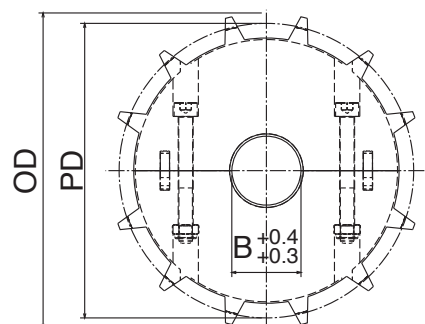


Part	Article-Nr.	z-	Bore	PD	OD
1571	157150	10	18*	102,8	107,7
1571	157151		25		
1571	157152		30		
1571	157153		35		
1571	157154		40		
1572	157250	13	18*	132,7	138,8
1572	157251		25		
1572	157252		30		
1572	157253		35		
1572	157254		40		
1573	157350	15	18*	152,7	159,4
1573	157351		25		
1573	157352		30		
1573	157353		35		
1573	157354		40		
1574	157450	16	18*	162,8	169,6
1574	157451		25		
1574	157452		30		
1574	157453		35		
1574	157454		40		

Materiale:	Material:	Materialien:
Poliammide rinforzato	Polyamide reinforced	Verstärktes Polyamid



Ruota traino, stampata / Drive sprocket, molded / Antriebskettenrad, gespritzt




Part	Article-Nr.	z-	Bore	PD	OD
1551	155104	10	Ø40	164,4	163,1
1551	155105		Ø50		
1551	155106		40x40		
1551	155107		60x60		
1551	155108		65x65		
1552	155204	12	Ø40	196,3	196,3
1552	155206		40x40		
1552	155207		60x60		
1552	155208		65x65		
1553	155311	13	Ø65	212,3	209
1553	155310		Ø90		
1553	155306		40x40		
1553	155307		60x60		
1553	155308		65x65		
1553	155309		90x90		
1559	155910	16	Ø90	260,4	262
1559	155905		Ø2,5"		
1559	155908		65x65		
1559	155909		90x90		
1559	155912		120x120		

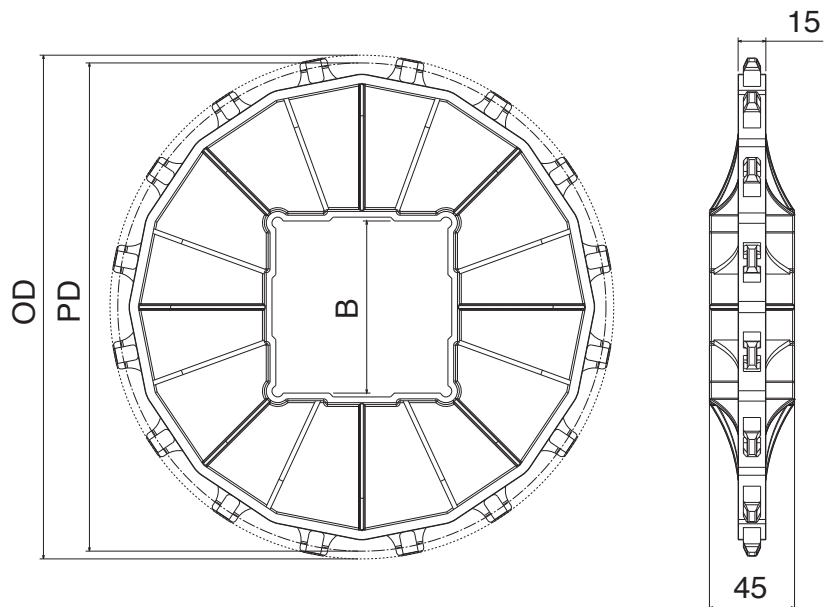





 pag. 108	 pag. 108	 pag. 108	 pag. 108	 pag. 109	 pag. 109
 pag. 109	 pag. 109	 pag. 110	 pag. 110	 pag. 110	 pag. 110
 pag. 111	 pag. 111	 pag. 111	 pag. 111	 pag. 112	 pag. 112
 pag. 112	 pag. 113	 pag. 113	 pag. 113	 pag. 114	 pag. 114
 pag. 114	 pag. 115	 pag. 115	 pag. 116	 pag. 116	
 pag. 116	 pag. 118	 pag. 118	 pag. 118	 pag. 118	
 pag. 118	 pag. 119	 pag. 119	 pag. 119		
	 pag. 120	 pag. 120	 pag. 120		

Materiale:	Material:	Materialien:
Polietilene (UHMW-PE)	Polyethylene (UHMW-PE)	Polyäthylen (UHMW-PE)





Profilo "Z" / Z-Profile / Z-Profil

Part	Article-Nr.	Colour
101	10101	black
101	10102	green





Profilo "Z" rinforzato / Z-Profile reinforced / Z-Profil, verstärkt

Part	Article-Nr.	Colour
102	10201	black
102	10202	green




Profilo Z-clip senza bordo / Z-clip profile without nose / ZK-Profil ohne Nase

Part	Article-Nr.	Colour
103	10301	black
103	10302	green




Profilo Z con bordo / Z-clip profile with nose / ZK-Profil mit Nase

Part	Article-Nr.	Colour
104	10401	black
104	10402	green




Materiale:	Material:	Materialien:
Polietilene (UHMW-PE)	Polyethylene (UHMW-PE)	Polyäthylen (UHMW-PE)

Profilo piatto / Flat profile / Flachprofil




Part	Article-Nr.	A	B	Colour
105	10501	20	3	black
105	10502	20	3	green
105	10503	20	5	black
105	10504	20	5	green
105	10505	60	3	black
105	10506	60	3	green
105	10507	70	3	black
105	10508	70	3	green




Profilo guida catena / Flat profile with nose / Wulst-Profil




Part	Article-Nr.	Colour
106	10601	black
106	10602	green



Profilo guida catena / Wear strip / Rückführleiste




Part	Article-Nr.	Colour
107	10701	black
107	10702	green



Profilo T / T-profile / T-Profil




Part	Article-Nr.	Colour
108	10801	black
108	10802	green




Materiale:	Material:	Materialien:
Profilato metallico: Acciaio inox	Metal profile: Stainless steel	Metall-Leiste: Edelstahl
Profilato plastico UHMW-PE	Plastic profile UHMW-PE	Kunststoff-Leiste UHMW-PE




Profilo clip-on guida catena / Flat clip-on wear strip / U-Profil Clip-on

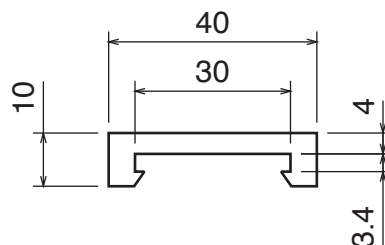

Part	Article-Nr.	Colour
109	10901	black
109	10902	green




Profilo clip-on guida catena con bordo / Flat clip-on wear strip with nose / U-Profil Clip-on mit Nase

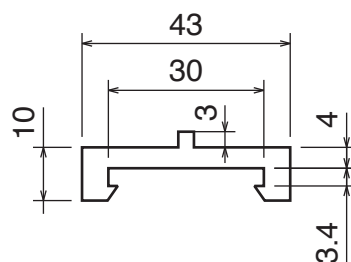


Part	Article-Nr.	Colour
110	11001	black
110	11002	green




Profilo ad "U" / U-profile / U-Profil

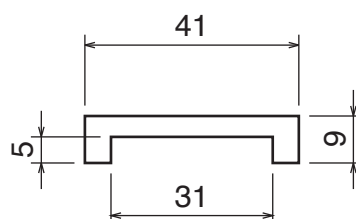

Part	Article-Nr.	Colour
111	11101	black
111	11102	green



Profilo Delta / D-Profile / D-Profil





Part	Article-Nr.
118	11801



Materiale:	Material:	Materialien:
Profilato metallico: Acciaio inox o Alluminio	Metal profile: SS or Aluminum	Metall-Leiste: Edelstahl oder aluminium
Profilato plastico UHMW-PE	Plastic profile UHMW-PE	Kunststoff-Leiste UHMW-PE


Profilo assemblato clip-on / Profile assembled clip-on / Profile montiert clip-on

Part	Article-Nr.	Material	Colour
133	13301	AISI 304	green
133	13302	AISI 430	green

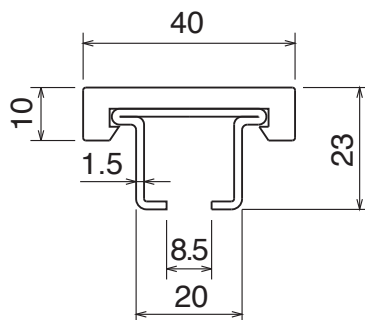


Profilo / Profile / Profil

Part	Article-Nr.	Material
112	11201	AISI 304
112	11202	AISI 430





Profilo in alluminio / Aluminum profile / Aluminium-Profil

Part	Article-Nr.	Material
147	14701	aluminum



Profilo assemblato clip-on / Profile assembled clip-on / Profile montiert clip-on


Part	Article-Nr.	Material	Colour
148	14801	aluminum	green

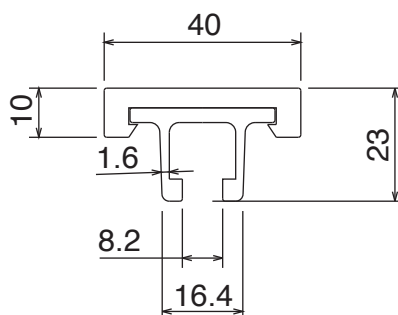

Materiale:	Material:	Materialien:
Profilato metallico: Acciaio inox o Ferro zincato	Metal profile: Stainless steel or Zinc plated steel	Metall-Leiste: Edelstahl oder Stahl Verzinkt
Profilato plastico UHMW-PE	Plastic profile UHMW-PE	Kunststoff-Leiste UHMW-PE




Guida conica tonda / Guide rail round / konische Führung rund



Part	Article-Nr.	Colour	Metal profile
119	11901	white	AISI 304
119	11902	black	AISI 304
119	11901S	white	AISI 430
119	11902S	black	AISI 430
119	11901Z	white	FeZn
119	11902Z	black	FeZn




Guida conica semitonda / Guide rail modified / konische Führung semi rund



Part	Article-Nr.	Colour	Metal profile
120	12001	white	AISI 304
120	12002	black	AISI 304
120	12001Z	white	FeZn
120	12002Z	black	FeZn



Guida conica piatta / Guide rail flat / konische Führung flach




Part	Article-Nr.	Colour	Metal profile
121	12101	white	AISI 304
121	12102	black	AISI 304
121	12101Z	white	FeZn
121	12102Z	black	FeZn



Materiale:	Material:	Materialien:
Profilato metallico: Acciaio inox o Ferro zincato	Metal profile: Stainless steel or Zinc plated steel	Metall-Leiste: Edelstahl oder Stahl Verzinkt
Profilato plastico UHMW-PE	Plastic profile UHMW-PE	Kunststoff-Leiste UHMW-PE


Guida conica profilo a T 25,4 mm / Guide rail T-shape 25,4 mm / konische Führung flach (T) 25,4 mm

Part	Article-Nr.	Colour	Metal profile
122	12201	white	AISI 304
122	12202	black	AISI 304
122	12201Z	white	FeZn
122	12202Z	black	FeZn




Guida conica profilo a T 31,75 mm / Guide rail T-shape 31,75 mm / konische Führung flach (T) 31,75 mm

Part	Article-Nr.	Colour	Metal profile
123	12301	white	AISI 304
123	12302	black	AISI 304
123	12301Z	white	FeZn
123	12302Z	black	FeZn



Guida conica profilo a T 40 mm / Guide rail T-shape 40 mm / konische Führung flach (T) 40 mm


Part	Article-Nr.	Colour	Metal profile
124	12401	white	AISI 304
124	12402	black	AISI 304
124	12401Z	white	FeZn
124	12402Z	black	FeZn



Materiale:	Material:	Materialien:
Profilato metallico: Acciaio inox o Ferro zincato	Metal profile: Stainless steel or Zinc plated steel	Metall-Leiste: Edelstahl oder Stahl Verzinkt
Profilato plastico UHMW-PE	Plastic profile UHMW-PE	Kunststoff-Leiste UHMW-PE




Guida conica profilo a "T" 19,05 mm / Guide rail T-shape 19,05 mm / konische Führung flach (T) 19,05 mm



Part	Article-Nr.	Colour	Metal profile
143	14301	white	AISI 304
143	14302	black	AISI 304
143	14301Z	white	FeZn
143	14302Z	black	FeZn




Guida conica profilo a "T" 57,15 mm / Guide rail T-shape 57,15 mm / konische Führung flach (T) 57,15 mm

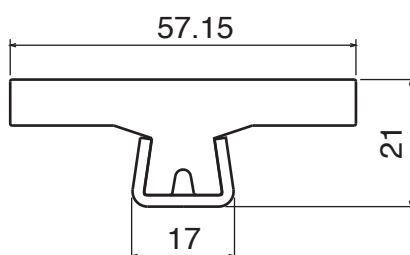

Part	Article-Nr.	Colour	Metal profile
141	14101	white	AISI 304
141	14102	black	AISI 304
141	14101Z	white	FeZn
141	14102Z	black	FeZn



Guida conica profilo a "T" 43,2 mm / Guide rail T-shape 43,2 mm / konische Führung flach (T) 43,2 mm




Part	Article-Nr.	Colour	Metal profile
142	14201	white	AISI 304
142	14202	black	AISI 304
142	14201Z	white	FeZn
142	14202Z	black	FeZn



Materiale:	Material:	Materialien:
Profilato metallico: Acciaio inox o Ferro zincato	Metal profile: Stainless steel or Zinc plated steel	Metall-Leiste: Edelstahl oder Stahl Verzinkt
Profilato plastico UHMW-PE	Plastic profile UHMW-PE	Kunststoff-Leiste UHMW-PE


Guida conica profilo a "L" 31,75 mm / Guide rail L-shape 31,75 mm / konische Führung flach (L) 31,75 mm

Part	Article-Nr.	Colour	Metal profile
144	14401	white	AISI 304
144	14402	black	AISI 304
144	14401Z	white	FeZn
144	14402Z	black	FeZn

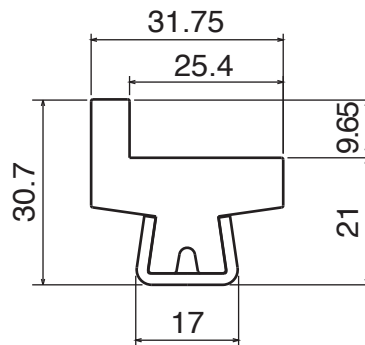

Guida tappeto / Belt side guide / Seitenführung für Mattenkette


Part	Article-Nr.	Colour	Metal profile
145	14503	grey	AISI 304






Profilo in alluminio / Aluminum rail for bottle guide / Aluminium profil

Part	Article-Nr.	Material
130	13001	Aluminium



Profilo guida bottiglia / Plastic rail for bottle guide / Flaschenführungs profil

Part	Article-Nr.	Material
131	13101	PE




Macchina curvatrice / Bending machine / Biegemaschine

Part	Article-Nr.
199	P19999


Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid

Rulli per macchina curvatrice / Roller for bending machine / Rollen für biegemaschine

Internal curve



External curve




P15101


for part 119-120-121



Internal curve



External curve




P15102


for part 122-123-124-142



Internal curve



External curve




P15103


for part 141



Internal curve




External curve



P15104

for part 144





P15105

for 08-010-012 - 01/2"-05/8"

Materiale:	Material:	Materialien:
Polietilene (UHMW-PE)	Polyethylene (UHMW-PE)	Polyäthylen (UHMW-PE)
Profilato metallico	Metal profile	Metall-Leiste
Acciaio inox	Stainless steel	Edelstahl


Guida standard / Standard guide rail / Seitenführung



Part	Article-Nr.	Colour
134	13401	green



Guida laterale H.78 mm / Side guide H.78 mm / Seitenführung H.78 mm

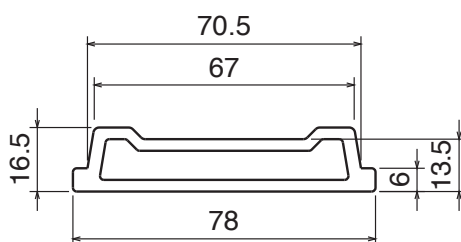


Part	Article-Nr.	Colour
135	13501	black



Used with
Part 394-331
Pag. 128-129



Guida laterale H.87 mm / Side guide H.87 mm / Seitenführung H.87 mm

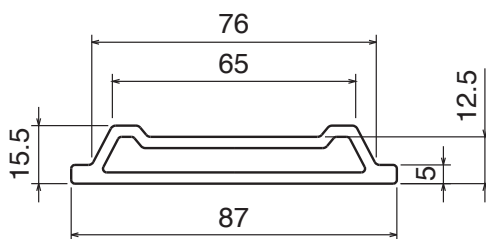


Part	Article-Nr.	Colour
136	13601	black



Used with
Part 394-345
Pag. 128-129




Profilo "C" / C-profile / C-Profil

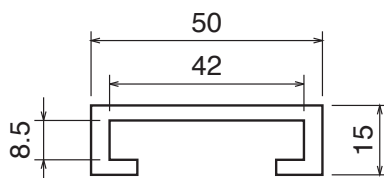

Part	Article-Nr.	Colour
137	13701	green



Profilo Omega / M-Profile / M-Profil



Part	Article-Nr.	A	Material
117	11701	8	AISI 304
117	11702	10	AISI 304




Materiale:	Material:	Materialien:
Poliammide rinforzato	Reinforced polyamide	Verstärktes Polyamid

Pattino guida catena, centrale / Central wear strip shoe / Zentraler Einlaufschuh



WITHOUT NOSE

Part	Article-Nr.	Colour
113	11301	black

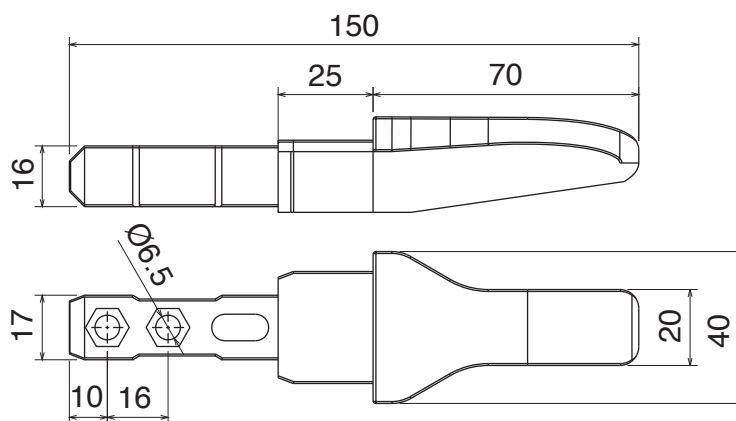


Pattino guida catena, centrale / Central wear strip shoe / Zentraler Einlaufschuh



WITH NOSE


Part	Article-Nr.	Colour
113	11302	black

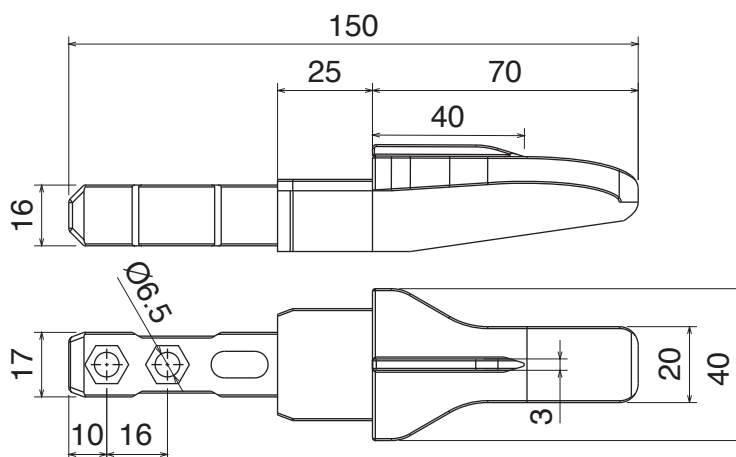

Blocchetto fissaggio / Fixing clamp / Fixierblock



Part	Article-Nr.	A	B	C	Colour
114	11401	10	6.2	4.5	black
114	11402	13	8.2	6	black




Materiale:	Material:	Materialien:
Poliammide rinforzato	Reinforced polyamide	Verstärktes Polyamid



Pattino guida catena, laterale / Side transfer guide shoe / seitlicher Tranferschuh

Part	Article-Nr.	Colour
116	11601	black

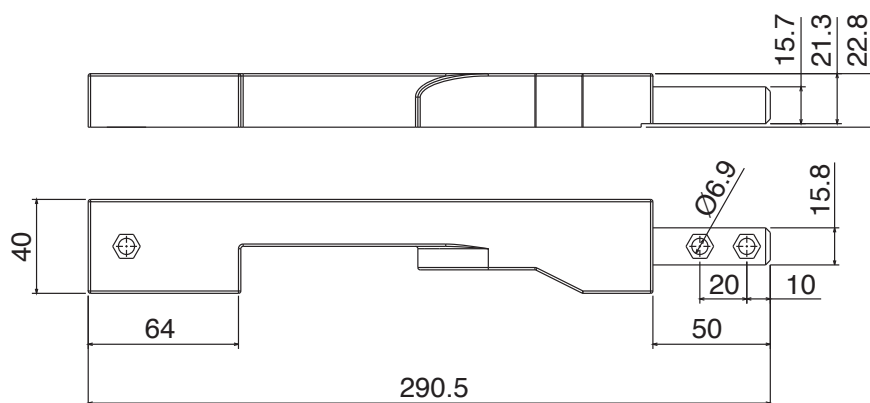


LEFT VERSION



Pattino guida catena, laterale / Side transfer guide shoe / seitlicher Tranferschuh

Part	Article-Nr.	Colour
116	11602	black

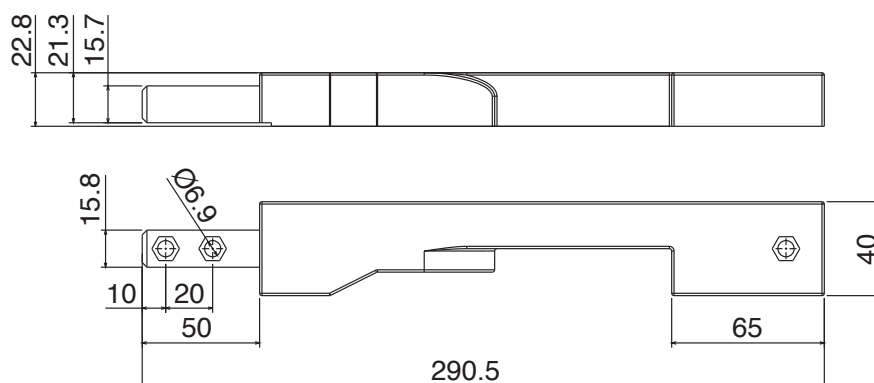


RIGHT VERSION



Blocchetto giunzione / Connecting element / Verbindungselement

Part	Article-Nr.	A	B	C	Colour
115	11501	10	6.2	4.5	black
115	11502	13	8.2	6	black

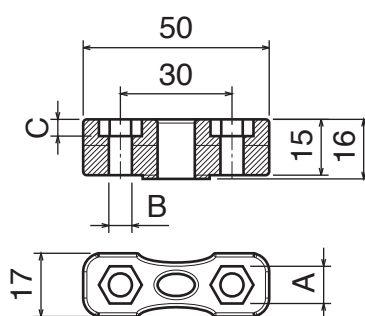

 Ø40 pag. 122	 Ø50 pag. 122	 Ø60 pag. 122	 Ø47 pag. 123	 Ø57 pag. 123	 Ø67 pag. 123
 pag. 124	 pag. 124	 pag. 124	 pag. 125	 pag. 125	 pag. 125
 pag. 126	 pag. 126	 pag. 127	 pag. 127	 pag. 127	




Materiale:	Material:	Materialien:
Polietilene (PE)	Polyethylene (PE)	Polyäthylen (PE)




Rullini di ritorno D=40 mm / Return roller D=40 mm / Rückführrolle D=40 mm

Part	Article-Nr.	ØA
219	21901	16
219	21902	18
219	21903	20

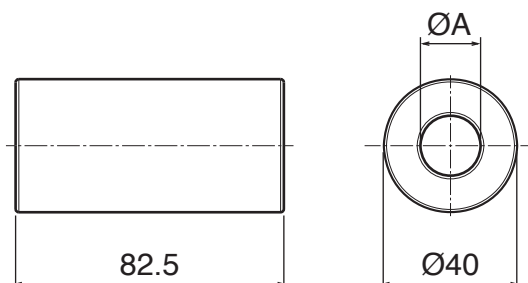


Rullini di ritorno D=50 mm / Return roller D=50 mm / Rückführrolle D=50 mm

Part	Article-Nr.	ØA
201	20101	16
201	20102	18
201	20103	20

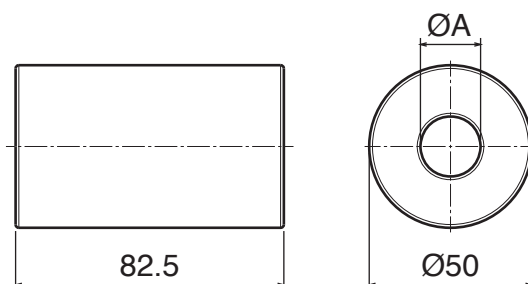

Rullini di ritorno D=60 mm / Return roller D=60 mm / Rückführrolle D=60 mm

Part	Article-Nr.	ØA
202	20201	16
202	20202	18
202	20203	20

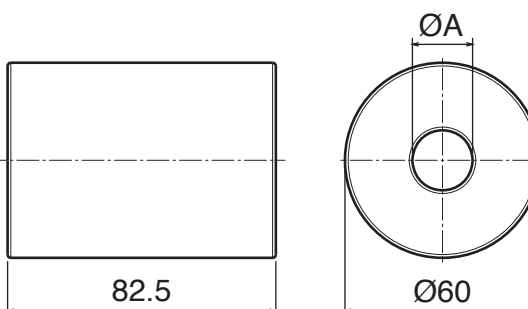


Materiale:	Material:	Materialien:
Rullino e flangia: PE	Roller and flange: PE	Rolle und Seitenscheibe: PE
Gomma: TPR	Rubber: TPR	Gummi: TPR




Rullini di ritorno gommati D=47 mm / Return roller with rubber D=47 mm / Rückführrolle gummiert D=47 mm




Part	Article-Nr.	ØA
220	22001	16
220	22002	18
220	22003	20

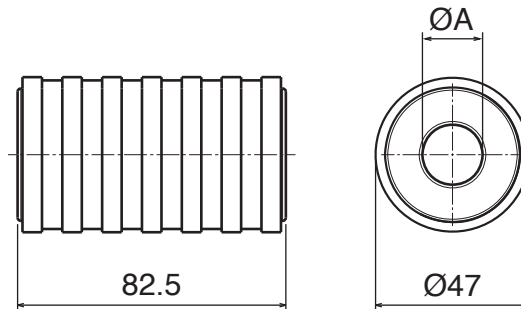


Rullini di ritorno gommati D=57 mm / Return roller with rubber D=57 mm / Rückführrolle gummiert D=57 mm




Part	Article-Nr.	ØA
203	20301	16
203	20302	18
203	20303	20

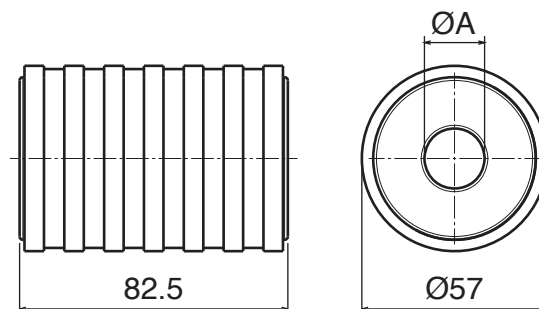

Rullini di ritorno gommati D=67 mm / Return roller with rubber D=67 mm / Rückführrolle gummiert D=67 mm




Part	Article-Nr.	ØA
204	20401	16
204	20402	18
204	20403	20

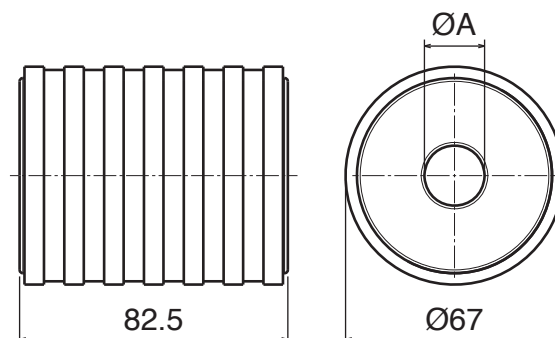

Materiale:	Material:	Materialien:
Polietilene (PE)	Polyethylene (PE)	Polyäthylen (PE)




Rullini di ritorno flangiati D=40 mm / Return roller with flange D=40 mm / Rückführrolle mit Seitenscheibe D=40 mm

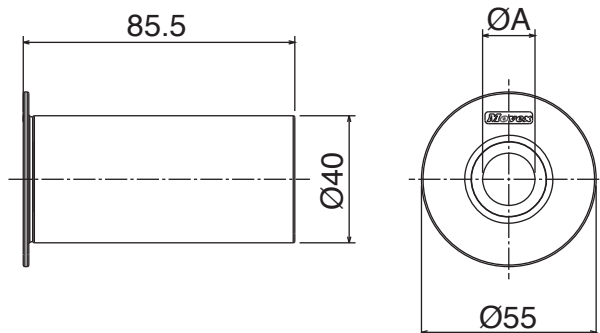

Part	Article-Nr.	ØA
222	22201	16
222	22202	18
222	22203	20




Rullini di ritorno flangiati D=50 mm / Return roller with flange D=50 mm / Rückführrolle mit Seitenscheibe D=50 mm

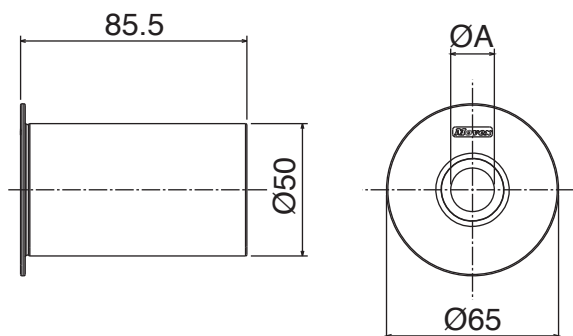

Part	Article-Nr.	ØA
224	22401	16
224	22402	18
224	22403	20



Rullini di ritorno flangiati D=60 mm / Return roller with flange D=60 mm / Rückführrolle mit Seitenscheibe D=60 mm

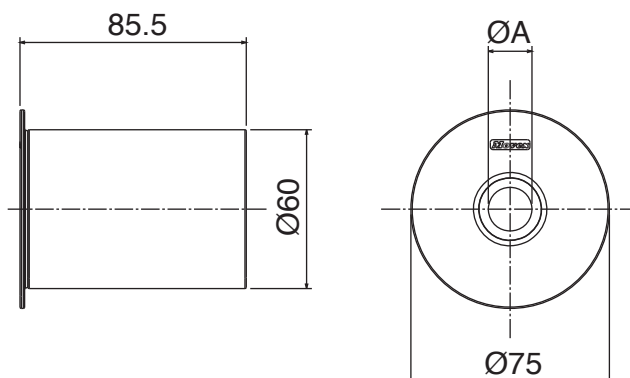

Part	Article-Nr.	ØA
226	22601	16
226	22602	18
226	22603	20


Materiale:	Material:	Materialien:
Rullino e flangia: PE	Roller and flange: PE	Rolle und Seitenscheibe: PE
Gomma: TPR	Rubber: TPR	Gummi: TPR



Rullini di ritorno flangiati gommati D=47 mm / Return roller with flange and rubber D=47 mm / Rückführrolle gummiert mit Seitenscheibe D=47 mm




Part	Article-Nr.	ØA
223	22301	16
223	22302	18
223	22303	20

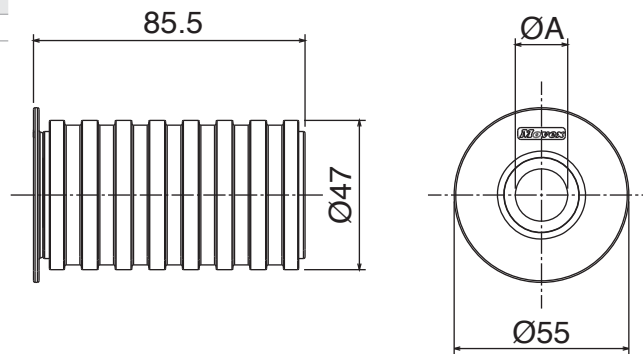

Rullini di ritorno flangiati gommati D=57 mm / Return roller with flange and rubber D=57 mm / Rückführrolle gummiert mit Seitenscheibe D=57 mm




Part	Article-Nr.	ØA
225	22501	16
225	22502	18
225	22503	20

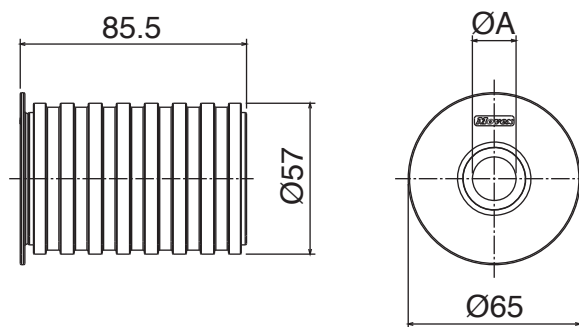

Rullini di ritorno flangiati gommati D=67 mm / Return roller with flange and rubber D=67 mm / Rückführrolle gummiert mit Seitenscheibe D=67 mm




Part	Article-Nr.	ØA
227	22701	16
227	22702	18
227	22703	20

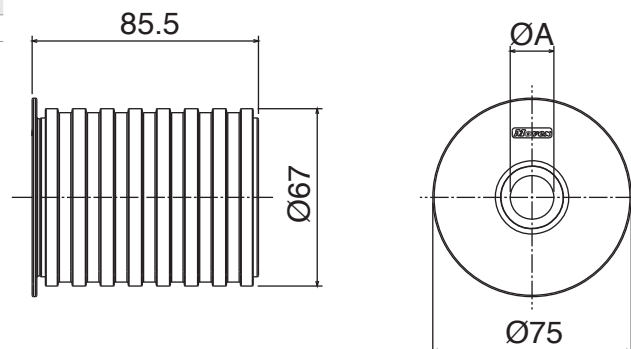



Flangia / Flange / Seitenscheibe




Part	Article-Nr.	ØA	ØB
207	20701	60	16
207	20702	60	18
207	20703	60	20
207	20704	70	16
207	20705	70	18
207	20706	70	20
207	20707	80	16
207	20708	80	18
207	20709	80	20



Pattino oscillante innesto rapido / Snap-on sliding shoe / Rücklaufschuh, aufsteckbar


Part	Article-Nr.	ØA
213	21301	16
213	21302	18
213	21303	20

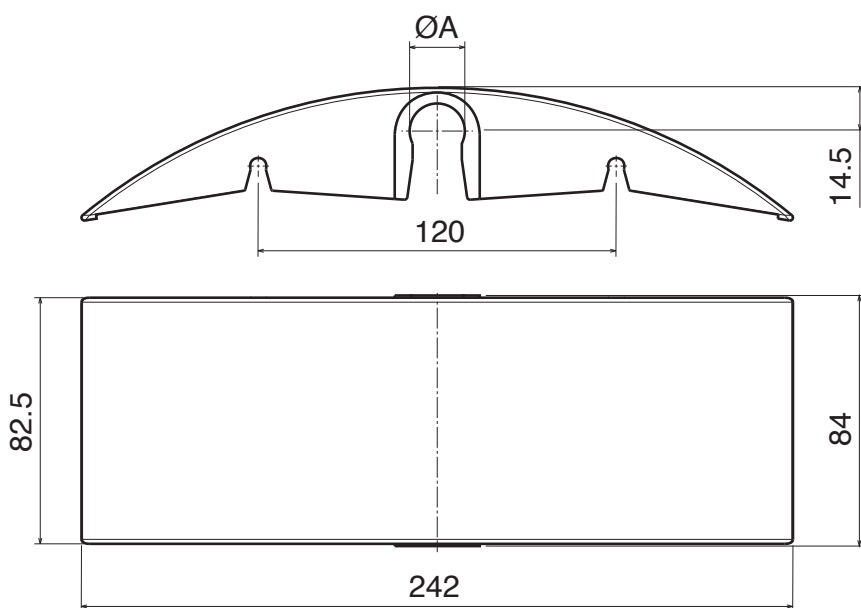

Materiale:	Material:	Materialien:
Pattino oscillante: PE	Sliding shoe: PE	Rücklaufschuh: PE
Collare di riferimento: PA	Split Collar: PA	Geteilter Stelling: PA
Viti e dadi:	Screws and nuts:	Schrauben und Mutter
Acciaio inox	Stainless steel	aus Edelstahl


Collare di riferimento con chiavetta / Split collar with keyway / geteilter Stelling mit Nut

Part	Article-Nr.	A	B	C	ØD	X
221	22101	8	28.3	14	25	46
221	22102	8	33.3	16	30	51
221	22103	10	38.3	16	35	57
221	22104	12	43.3	18	40	64

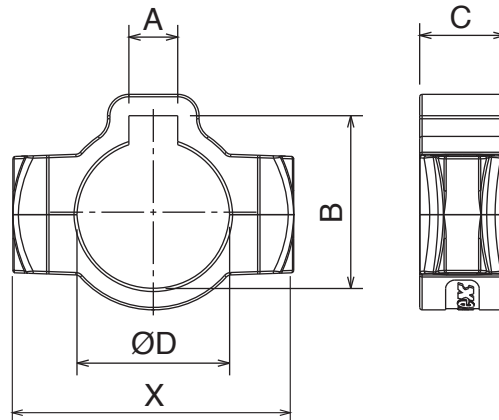


Collare di riferimento / Split collar / geteilter Stelling


Part	Article-Nr.	ØA	ØB	C	X
215	21501	20	12	12	29.5
215	21502	22	14	12	31.5
215	21503	26	18	14	40
215	21504	28	20	14	40
215	21505	32	25	14	46
215	21506	38	30	16	51
215	21507	43	35	16	57
215	21508	48	40	18	64

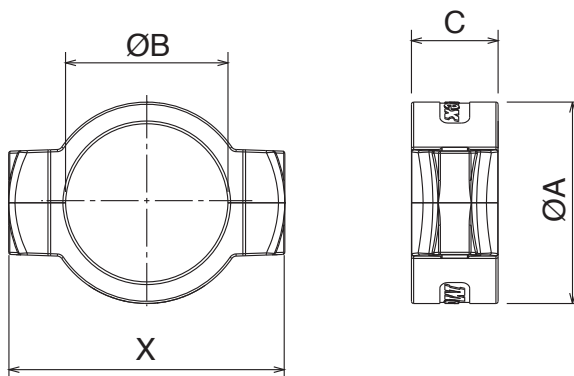


Collare di riferimento / Split collar / geteilter Stelling

Part	Article-Nr.	A	□B	C
217	21701	33	25	55
217	21702	37	30	60
217	21703	47	40	70
217	21704	59	50	81
217	21705	69	60	92

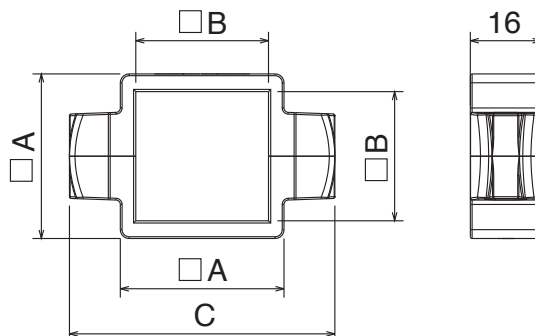

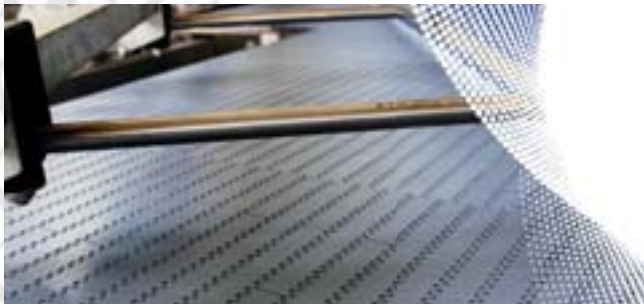




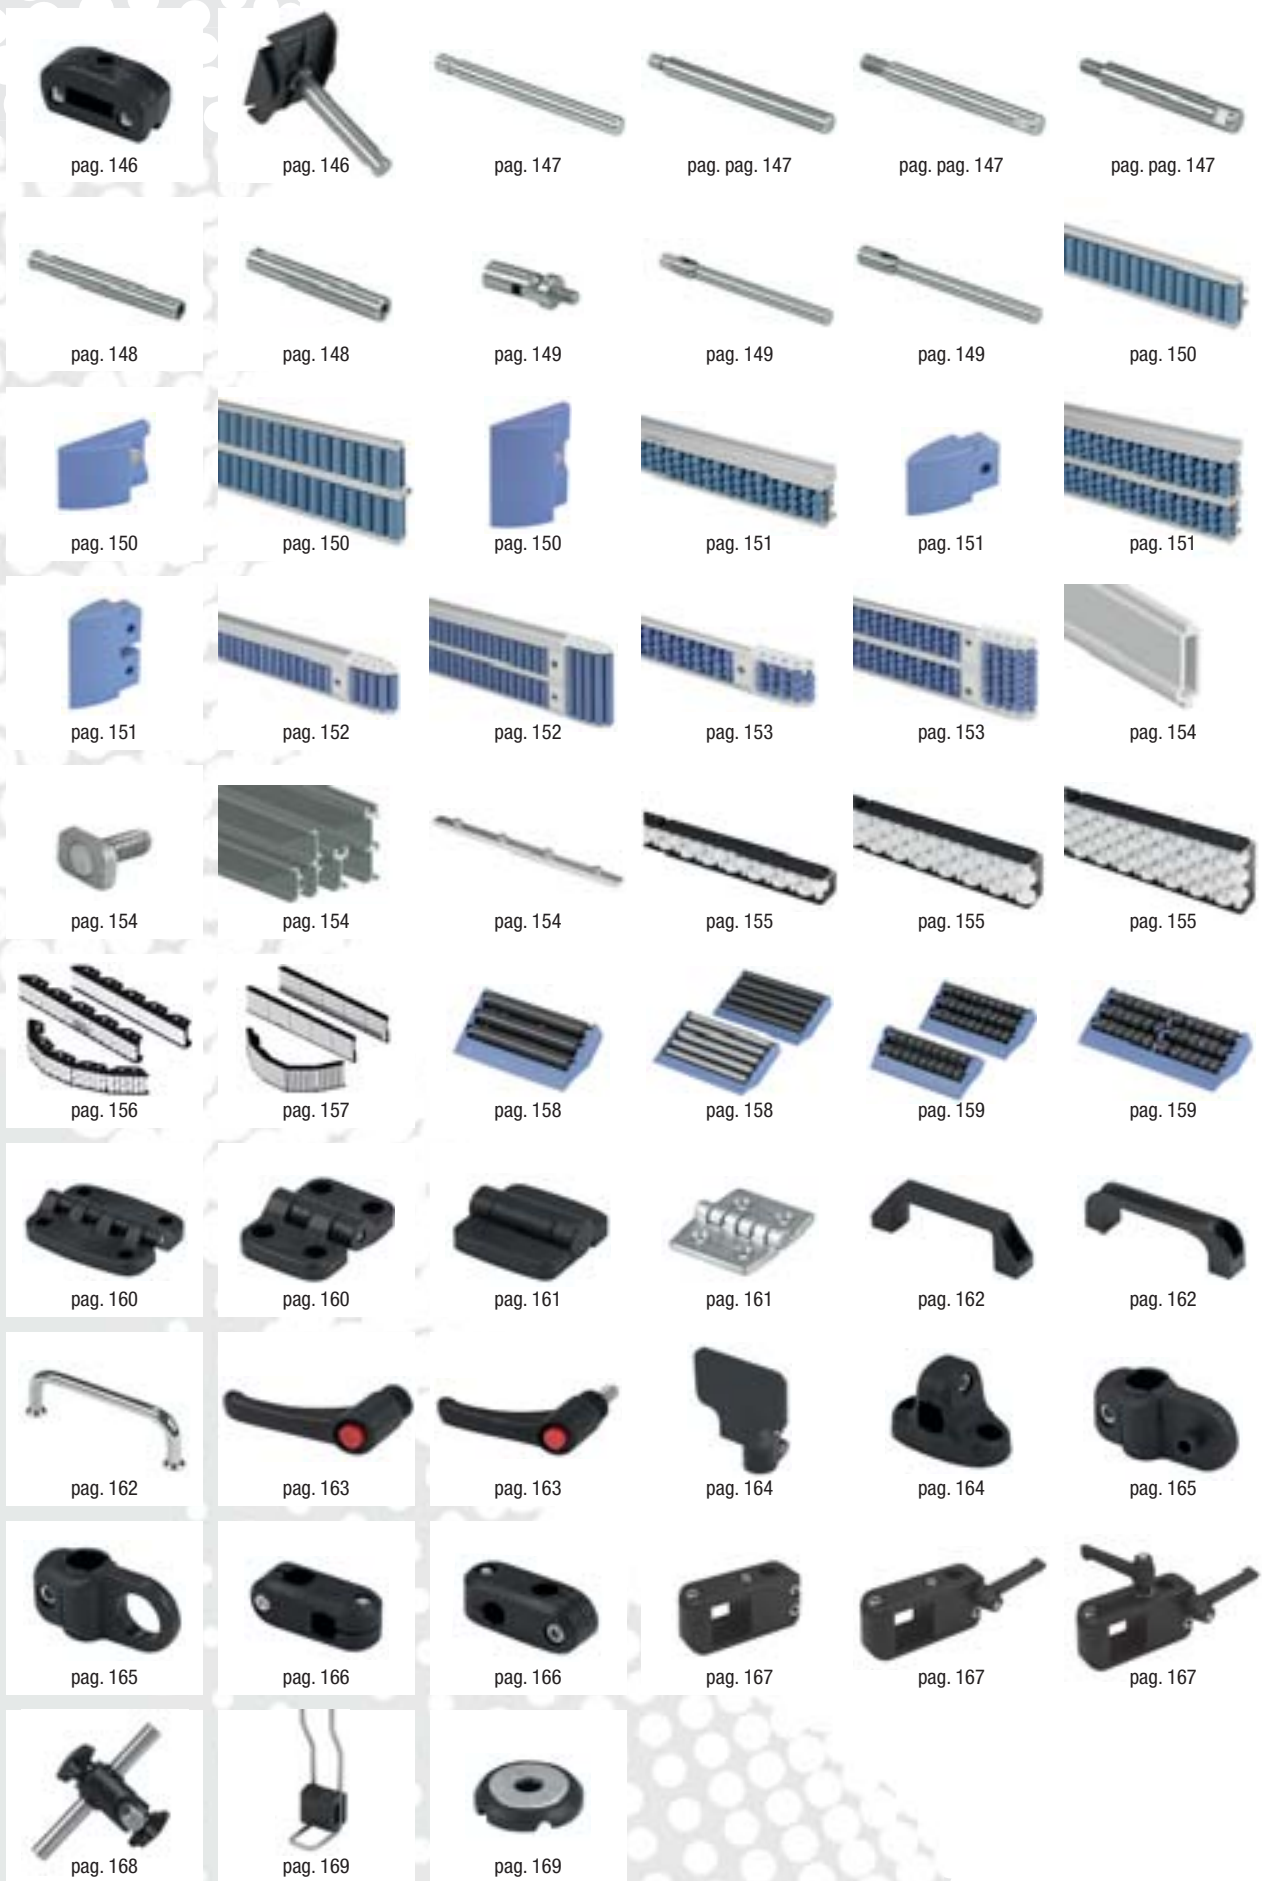

Materiale:	Material:	Materialien:
Supporto: PA	Support: PA	Halter: PA
Volantino: PA + ottone nichelato	Knob: PA + nickel plated brass	Sterngriff: PA + Messing vernickelt
Tirante: Acciaio inox	Eyebolt: Stainless steel	Augenschraube: Edelstahl


Supporto laterale -piccolo- / Side bracket -small- / Geländerhalter -klein-

Part	Article-Nr.	ØA	B
301	30101	12	9
301	30105	14	9
301	30102	16	9
301	30103	12	10,5
301	30106	14	10,5
301	30104	16	10,5

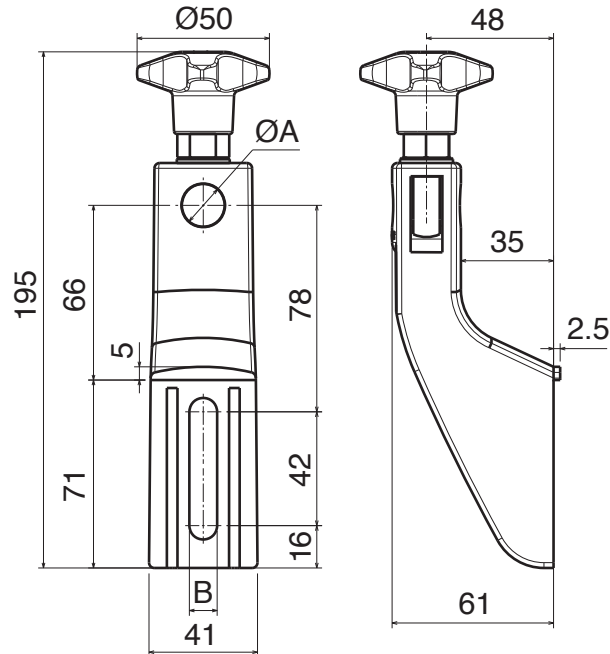


Supporto laterale -piccolo-, volantino alto / Side bracket -small- high knob / Geländerhalter -klein- hoher Sterngriff

Part	Article-Nr.	ØA	B
302	30201	12	9
302	30205	14	9
302	30202	16	9
302	30203	12	10,5
302	30206	14	10,5
302	30204	16	10,5

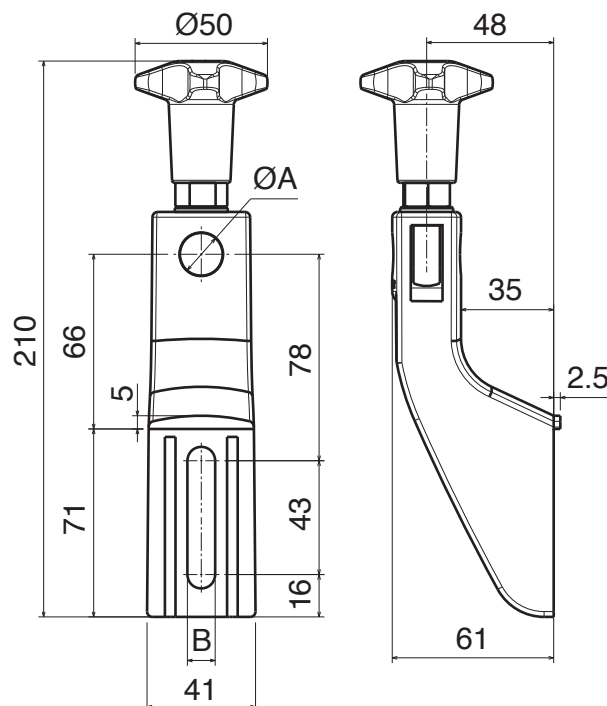

Materiale:	Material:	Materialien:
Supporto: PA	Support: PA	Halter: PA
Volantino: PA + ottone nichelato	Knob: PA + nickel plated brass	Sterngriff: PA + Messing vernickelt
Tirante: Acciaio inox	Eyebolt: Stainless steel	Augenschraube: Edelstahl


Supporto laterale -medio- / Side bracket -medium- / Geländerhalter -medium-

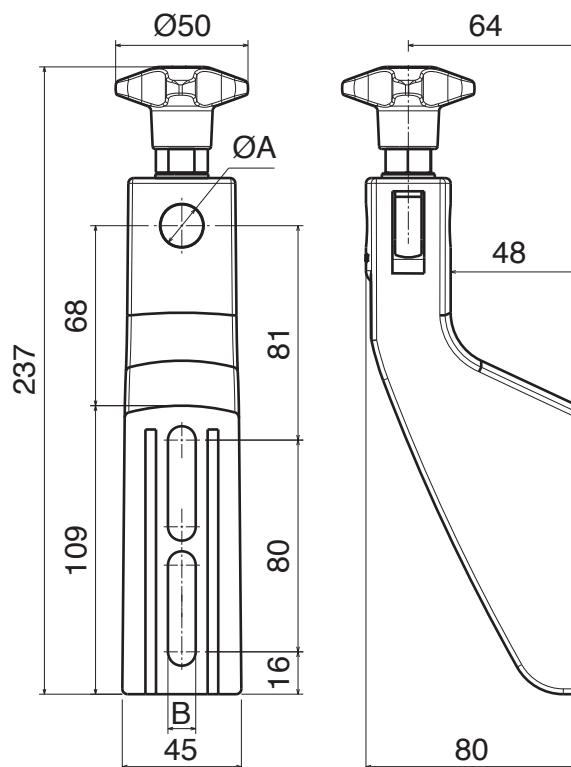

Part	Article-Nr.	ØA	B
305	30501	12	9
305	30505	14	9
305	30502	16	9
305	30503	12	10,5
305	50306	14	10,5
305	30504	16	10,5



Supporto laterale -medio-, volantino alto / Side bracket -medium-, high knob / Geländerhalter -medium-, hoher Sterngriff

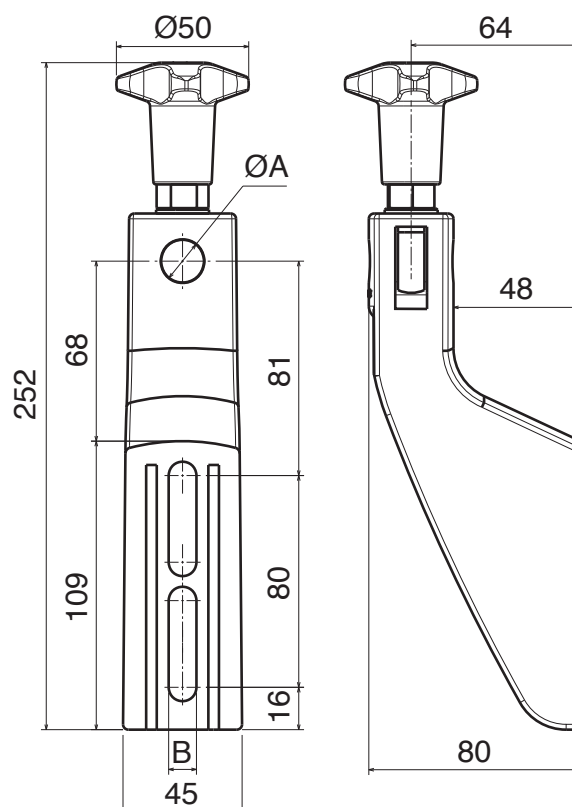


Part	Article-Nr.	ØA	B
306	30601	12	9
306	30605	14	9
306	30602	16	9
306	30603	12	10,5
306	30606	14	10,5
306	30604	16	10,5

Materiale:	Material:	Materialien:
Supporto: PA	Support: PA	Halter: PA
Volantino: PA + ottone nichelato	Knob: PA + nickel plated brass	Sterngriff: PA + Messing vernickelt
Tirante: Acciaio inox	Eyebolt: Stainless steel	Augenschraube: Edelstahl
Testina: PA o Acciaio inox	Heads: PA or stainless steel	Schwenkkopf: PA oder Edelstahl
Vite, rondella e dado: Acciaio inox	Screw, washers and nut: Stainless steel	Schraube, Unterlegs und Mutter: Edelstahl


Supporto laterale -medio-, orientabile / Side bracket -medium-, adjustable / Geländerhalter -medium-, orientierbar

Part	Article-Nr.	ØA	B
307	30701	12	9
307	30705	14	9
307	30702	16	9
307	30703	12	10,5
307	30706	14	10,5
307	30704	16	10,5
307	30709	bracket	9
307	30710	bracket	10,5

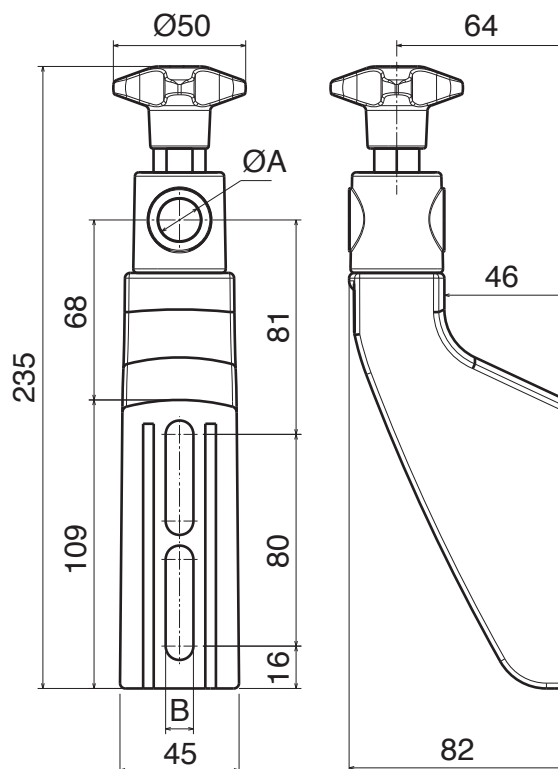


Supporto laterale -medio-, orientabile INOX / Side bracket -medium-, adjustable SS / Geländerhalter -medium-, orientierbar Edelstahl

Part	Article-Nr.	ØA	B
308	30801	12	9
308	30805	14	9
308	30802	16	9
308	30803	12	10,5
308	30806	14	10,5
308	30804	16	10,5

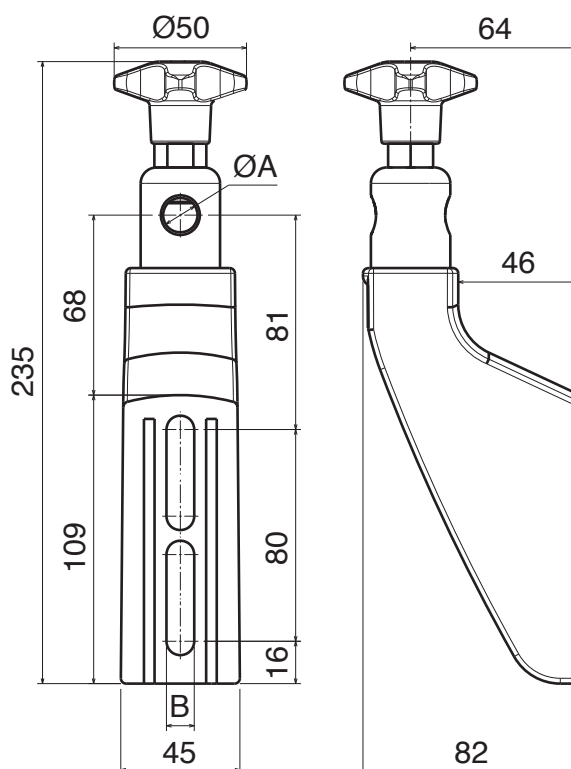

Materiale:	Material:	Materialien:
Supporto: PA	Support: PA	Halter: PA
Volantino: PA + ottone nichelato	Knob: PA + nickel plated brass	Sterngriff: PA + Messing vernickelt
Tirante: Acciaio inox	Eyebolt: Stainless steel	Augenschraube: Edelstahl


Supporto laterale -grande- / Side bracket -large- / Geländerhalter -groß-

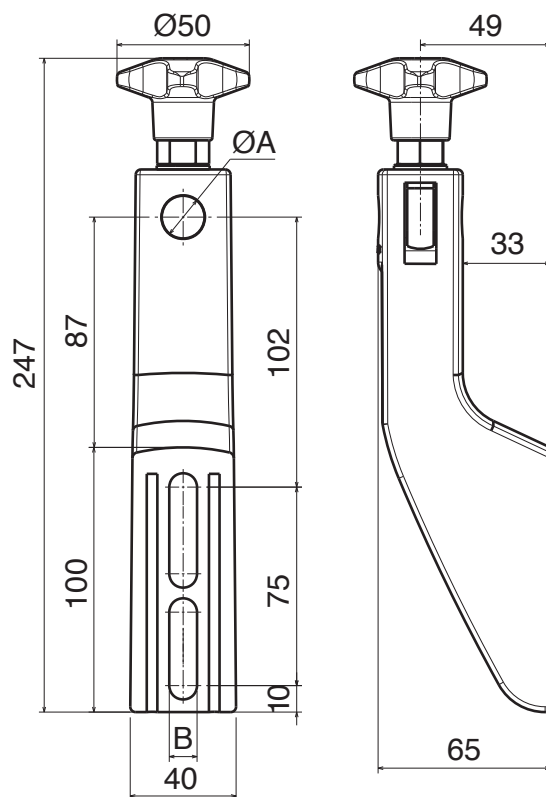

Part	Article-Nr.	ØA	B
309	30901	12	9
309	30905	14	9
309	30902	16	9
309	30903	12	10,5
309	30906	14	10,5
309	30904	16	10,5



Supporto laterale -grande-, volantino alto / Side bracket -large-, high knob / Geländerhalter -groß-, hoher Sterngriff

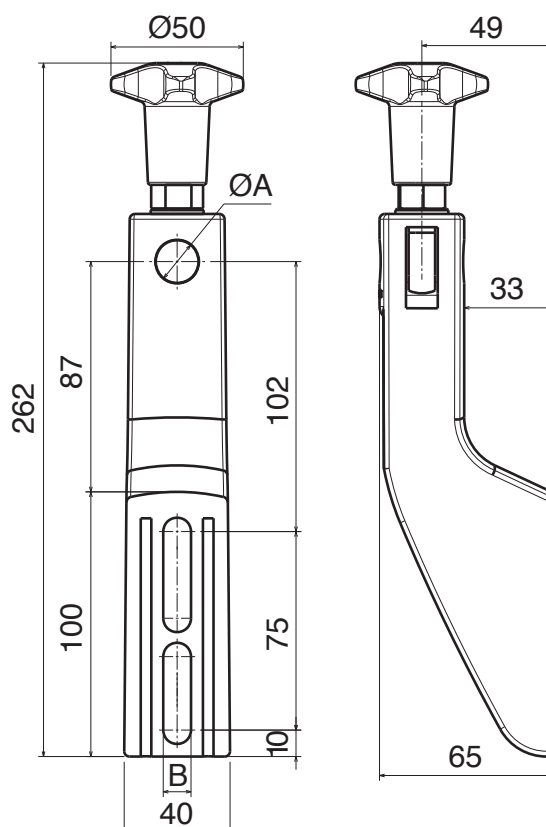


Part	Article-Nr.	ØA	B
310	31001	12	9
310	31005	14	9
310	31002	16	9
310	31003	12	10,5
310	31006	14	10,5
310	31004	16	10,5

Materiale:	Material:	Materialien:
Supporto: PA	Support: PA	Halter: PA
Volantino: PA + ottone nichelato	Knob: PA + nickel plated brass	Sterngriff: PA + Messing vernickelt
Tirante: Acciaio inox	Eyebolt: Stainless steel	Augenschraube: Edelstahl
Testina: PA o Acciaio inox	Heads: PA or stainless steel	Schwenkopf: PA oder Edelstahl
Vite, rondella e dado: Acciaio inox	Screw, washers and nut: Stainless steel	Schraube, Unterlegs und Mutter: Edelstahl


Supporto laterale -grande-, orientabile / Side bracket -large-, adjustable / Geländerhalter -groß-, orientierbar


Part	Article-Nr.	ØA	B
311	31101	12	9
311	31105	14	9
311	31102	16	9
311	31103	12	10,5
311	31106	14	10,5
311	31104	16	10,5
311	31109	bracket	9
311	31110	bracket	10,5

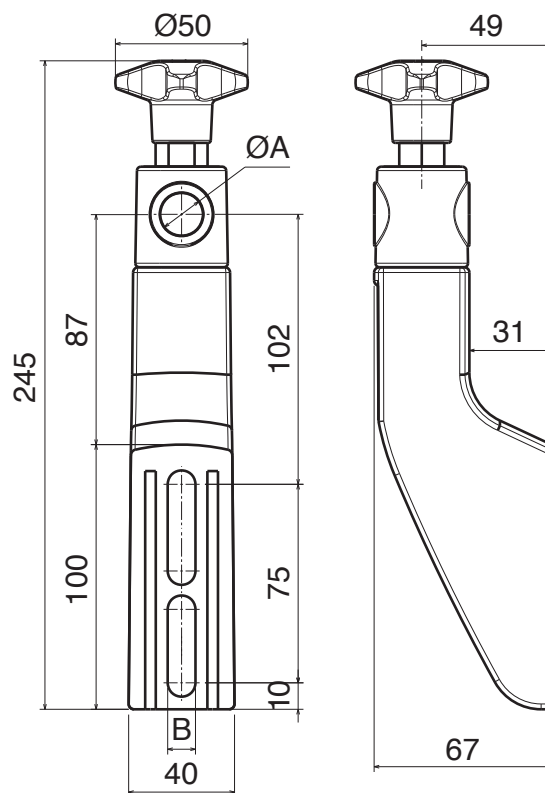

Supporto laterale -grande-, orientabile INOX / Side bracket -large-, adjustable SS / Geländerhalter -groß-, orientierbar Edelstahl

Part	Article-Nr.	ØA	B
312	31201	12	9
312	31205	14	9
312	31202	16	9
312	31203	12	10,5
312	31206	14	10,5
312	31204	16	10,5

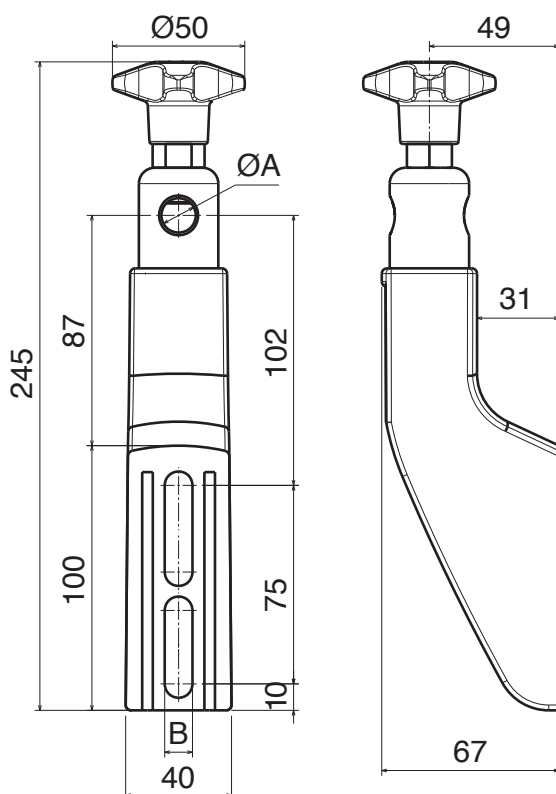


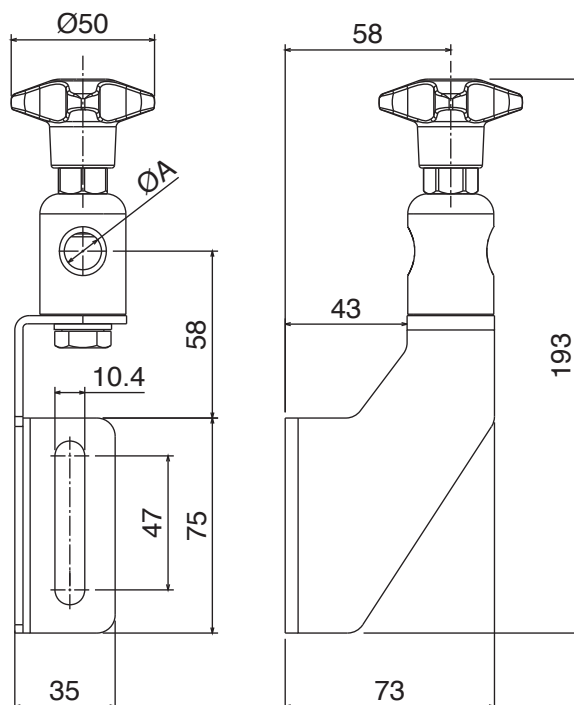**New**

Materiale:	Material:	Materialien:
Supporto: PA	Support: PA	Halter: PA
Volantino: PA + ottone nichelato	Knob: PA + nickel plated brass	Sterngriff: PA + Messing vernickelt
Tirante: Acciaio inox	Eyebolt: Stainless steel	Augenschraube: Edelstahl

Supporto laterale inox -medio- orientabile / SS bracket -medium-, adjustable / Edelstahl Geländerhalter -medium-, orientierbar

Part	Article-Nr.	ØA
398	39860	12
398	39862	14
398	39861	16

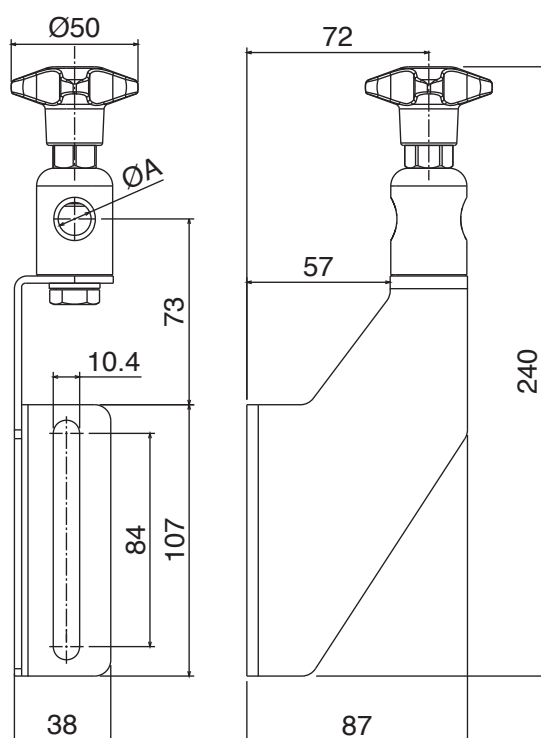**New**



Supporto laterale inox -grande- orientabile / SS bracket -large-, adjustable / Edelstahl Geländerhalter -groß-, orientierbar

Part	Article-Nr.	ØA
398	39870	12
398	39872	14
398	39871	16

Materiale:	Material:	Materialien:
Volantino: PA + ottone nichelato	Knob: PA + nickel plated brass	Sterngriff: PA + Messing vernickelt
Tirante: Acciaio inox	Eyebolt: Stainless steel	Augenschraube: Edelstahl
Testina: PA o Acciaio inox	Heads: PA or stainless steel	Schwenkkopf: PA oder Edelstahl
Vite, rondella e dado: Acciaio inox	Screw, washers and nut: Stainless steel	Schraube, Unterlegs und Mutter: Edelstahl



Testina orientabile / Adjustable head / Schwenkkopf

Part	Article-Nr.	ØA
313	31301	12
313	31303	14
313	31302	16
313	31311	12-without knob
313	31313	14-without knob
313	31312	16-without knob

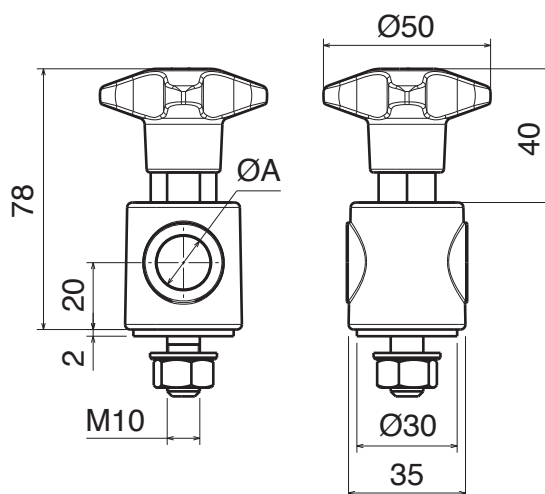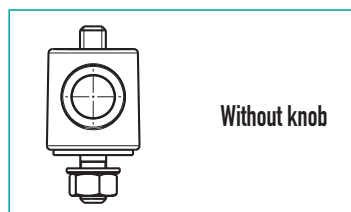


Testina orientabile, acciaio inox / Adjustable head, stainless steel / Schwenkkopf, Edelstahl

Part	Article-Nr.	ØA
314	31401	12
314	31403	14
314	31402	16
314	31411	12-without knob
314	31413	14-without knob
314	31412	16-without knob

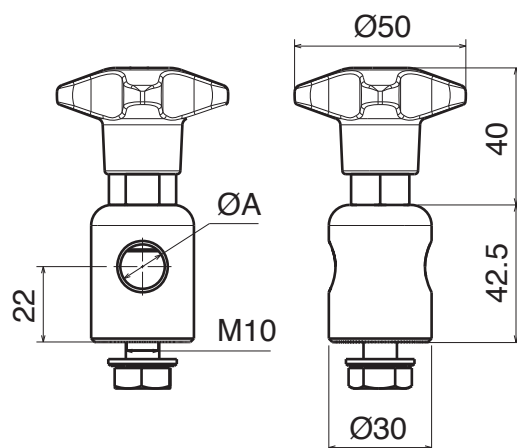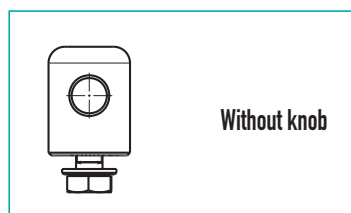

Testina orientabile alta, acciaio inox / Adjustable head, stainless steel / Schwenkkopf, Edelstahl


Part	Article-Nr.	ØA
314	31409	12
314	31414	14
314	31410	16
314	31419	12-without knob
314	31421	14-without knob
314	31420	16-without knob

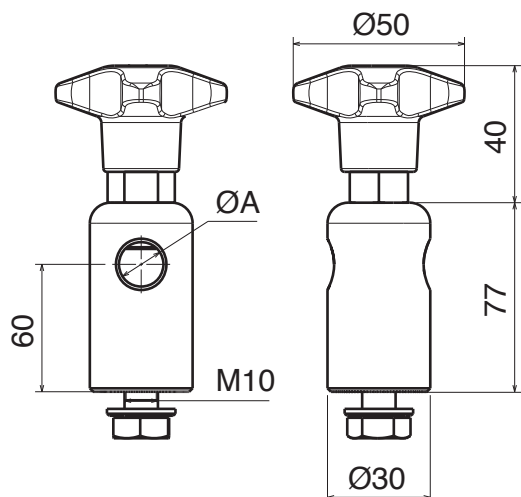




Supporto laterale "L" / L-bracket / Winkel

Part	Article-Nr.	Type
315	31501	A
315	31502	B

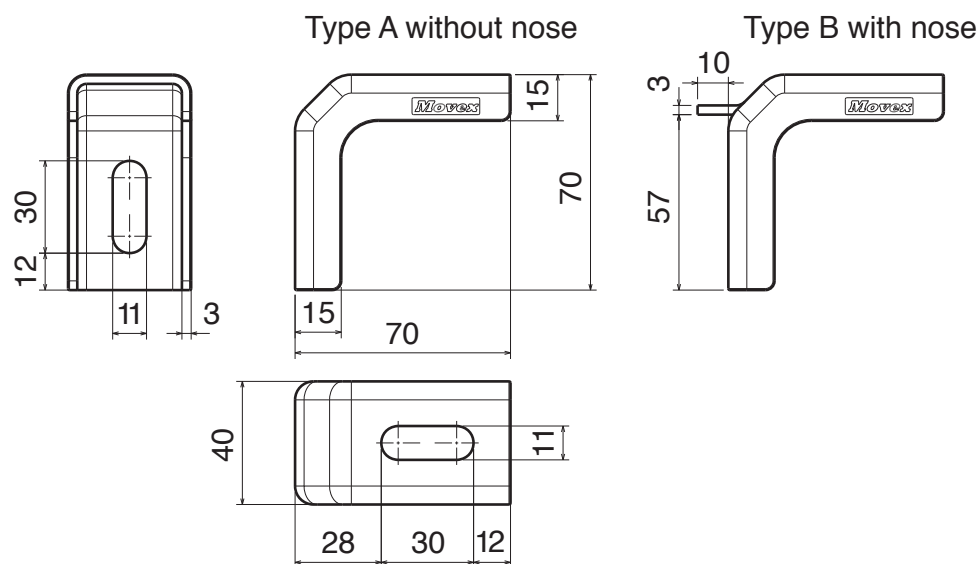

Supporto laterale "L" / L-bracket / Winkel


Part	Article-Nr.	Type
316	31601	A
316	31602	B

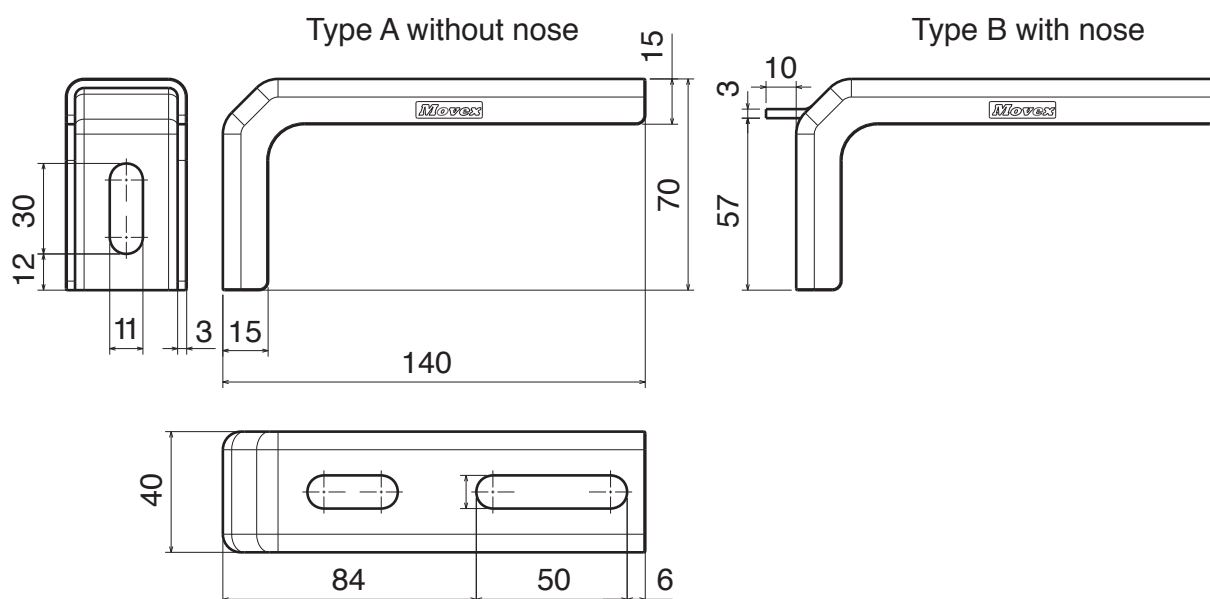

Materiale:	Material:	Materialien:
Poliammide + ottone nichelato	Polyamide + nickel plated brass	Polyamid + Messing vernickelt


Volantino / Star knob / Sterngriff

Part	Article-Nr.
317	31701

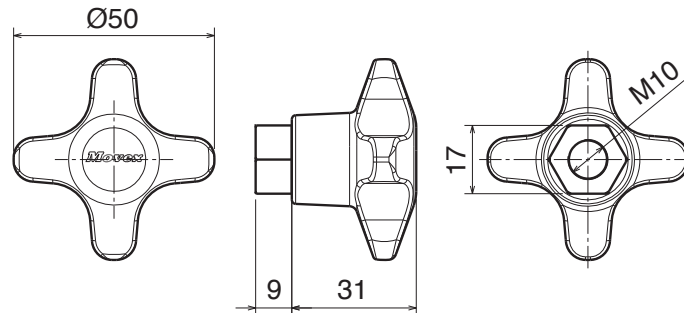


Volantino con tirante / Star knob with eye-bolt / Sterngriff mit Augenschraube

Part	Article-Nr.	ØA
317	31799	12
317	31797	14
317	31798	16

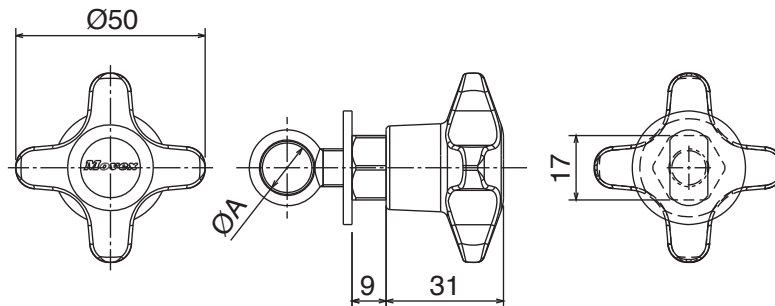

Volantino / Star knob / Sterngriff

Part	Article-Nr.
318	31801

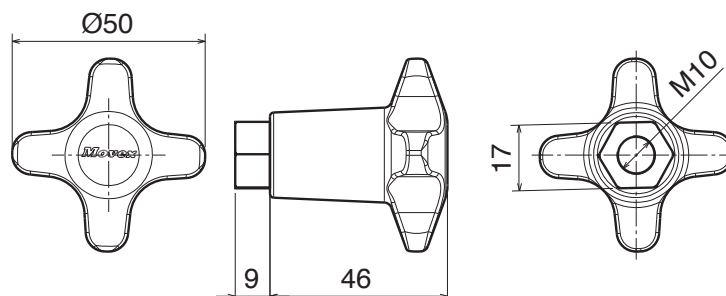


Materiale:	Material:	Materialien:
Poliammide + ottone nichelato	Polyamide + nickel plated brass	Polyamid + Messing vernickelt




Volantino / Star knob / Sterngriff

Part	Article-Nr.
319	31901

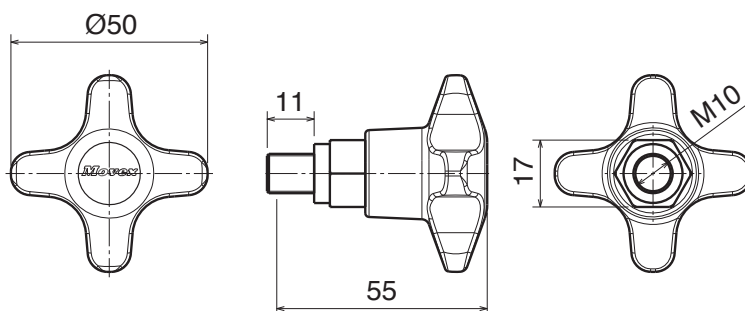

Volantino Ø80 / Star knob Ø80 / Sterngriff Ø80

Part	Article-Nr.	A
320	32001	M12
320	32002	M16

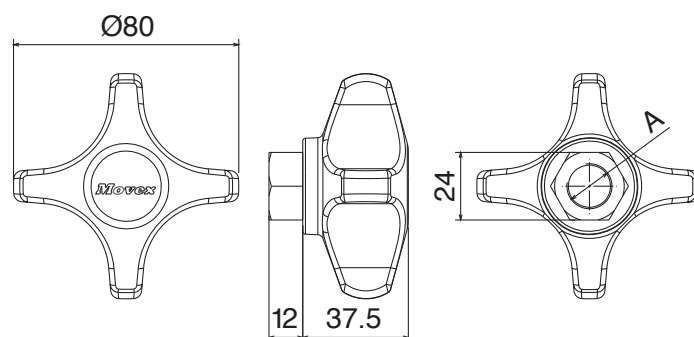


Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid

Distanziale per supporto -piccolo- / Spacer for bracket -small- / Distanzstück für Geländerhalter -klein-

Part Article-Nr.


321 32101

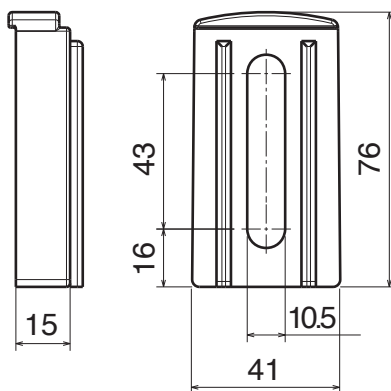

Distanziale per supporto -medio- / Spacer for bracket -medium- / Distanzstück für Geländerhalter -medium-

Part Article-Nr.


322 32201

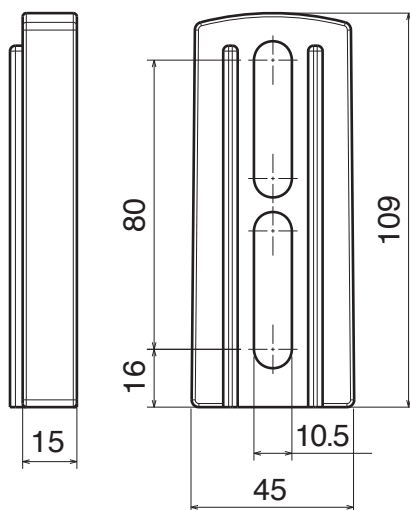

Distanziale per supporto -grande- / Spacer for bracket -large- / Distanzstück für Geländerhalter -groß-

Part Article-Nr.


323 32301

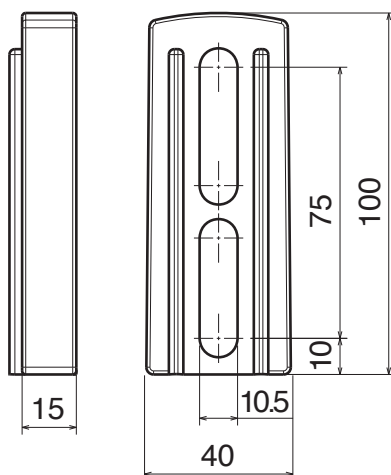

Materiale:	Material:	Materialien:
Morsetti: PA	Clamp: PA	Klemme: PA
Vite, perno e rondella:	Screw, pin and washer:	Schraube, Bolzen und Scheibe:
Acciaio inox	Stainless steel	Edelstahl
Dado: ottone nichelato	Nut: nickel plated brass	Mutter: Messing vernickelt


Morsetto singolo per guida laterale conica / Single clamp for conical side guide / Einfachklemme für konische Seitenführung

Part	Article-Nr.
324	32401

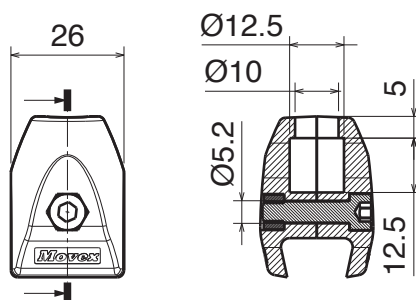



Morsetto singolo per guida laterale conica / Single clamp for conical side guide / Einfachklemme für konische Seitenführung

Part	Article-Nr.
325	32501

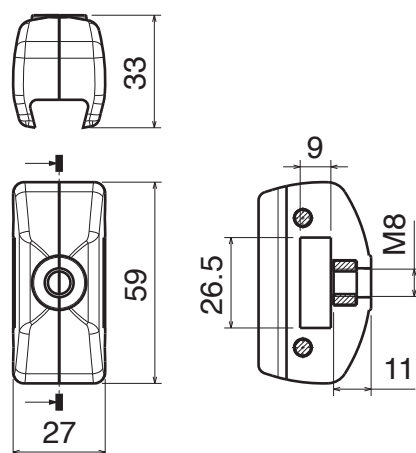


Morsetto singolo per guida laterale conica / Single clamp for conical side guide / Einfachklemme für konische Seitenführung

Part	Article-Nr.
326	32601

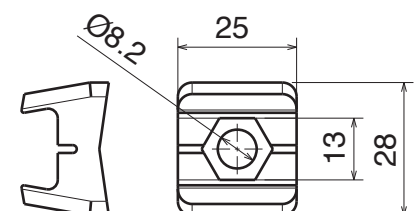

Morsetto doppio per guida laterale conica / Double clamp for conical side guide / Doppelklemme für konische Seitenführung

Part	Article-Nr.	ØA
327	32701	without pin
327	32702	12
327	32703	16

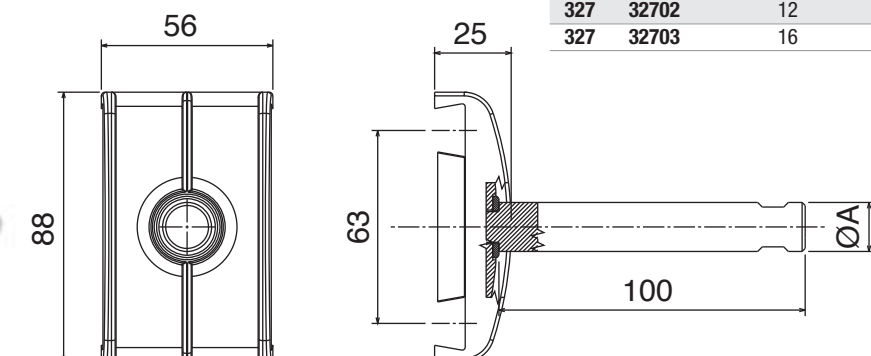


Materiale:	Material:	Materialien:
Acciaio inox	Stainless steel	Edelstahl

Morsetti Guide Coniche
Clamp for Conical Guides
Klemmen für konische Führung

328-329-330-390


Morsetto singolo per guida laterale conica / Single clamp for conical side guide / Einfachklemme für konische Seitenführung

Part	Article-Nr.	Material
328	32801	Aisi 304
328	328811	Aisi 316

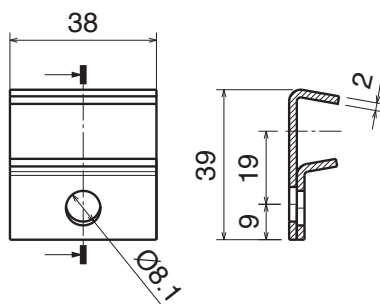


Morsetto doppio per guida laterale conica / Double clamp for conical side guide / Doppelklemme für konische Seitenführung

Part	Article-Nr.	A
329	32901	63.5
329	32902	82.5
329	32903	95.2

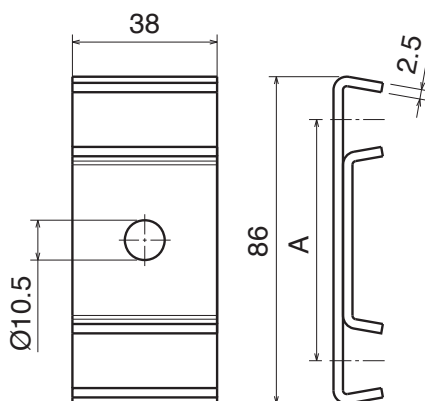


Morsetto singolo per guida laterale conica / Single clamp for conical side guide / Einfachklemme für konische Seitenführung

Part	Article-Nr.	A
330	33001	15
330	33002	25
330	33003	20
330	33004	30

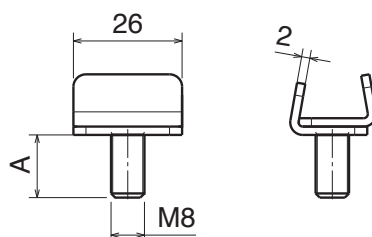

Elemento di giunzione / Connecting element / Verbinder

Part	Article-Nr.
390	39001

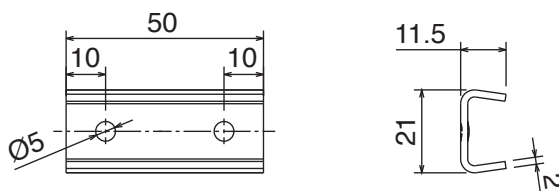

Materiale:
Acciaio inox



Material:
Stainless steel

Materialien:
Edelstahl




Elemento di connessione / Connecting clamp / Verbindungsklemme

Part	Article-Nr.	A
392	39201	75
392	39202	100
392	39203	150

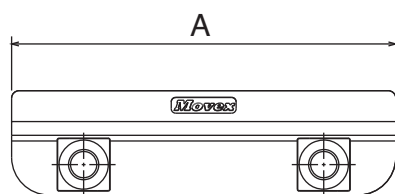

Morsetto di giunzione / Joint clamp / Verbindungsplatte

Part	Article-Nr.	A	B	C	
394	39401	81,5	9	18	used with part 135
394	39402	90	8	17	used with part 136

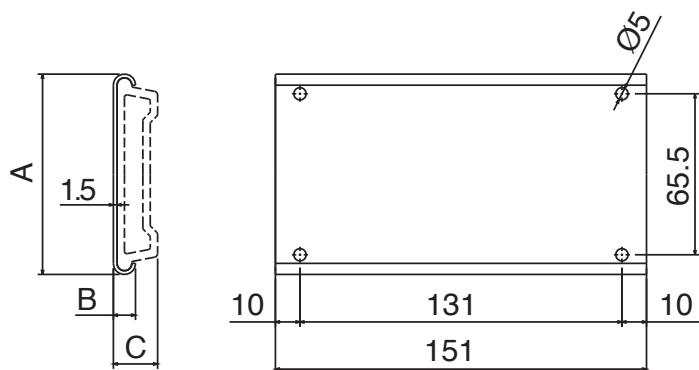

Used with
Part 135
Pag. 118




Used with
Part 136
Pag. 118

Materiale:	Material:	Materialien:
Morsetti: acciaio inox	Clamp: SS	Klemme: Edelstahl
Viti e perno: Acciaio inox	Screws and pin: Stainless steel	Schraube und Bolzen: Edelstahl
Dadi: ottone nichelato	Nuts: nickel plated brass	Mutter: Messing vernickelt


Morsetto acciaio inox / Clamp, stainless steel / Klemme, Edelstahl

Part	Article-Nr.	ØA
331	33101	without pin
331	33102	12
331	33103	16

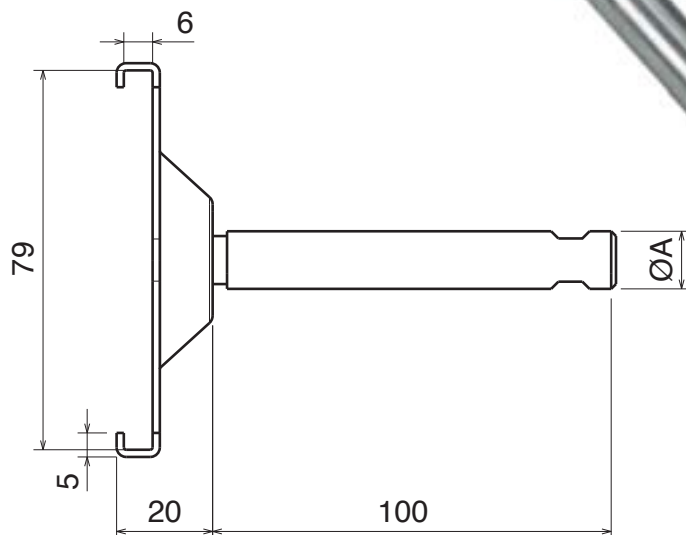


Morsetto acciaio inox / Clamp, stainless steel / Klemme, Edelstahl

Part	Article-Nr.	ØA
345	34501	without pin
345	34502	12
345	34503	16

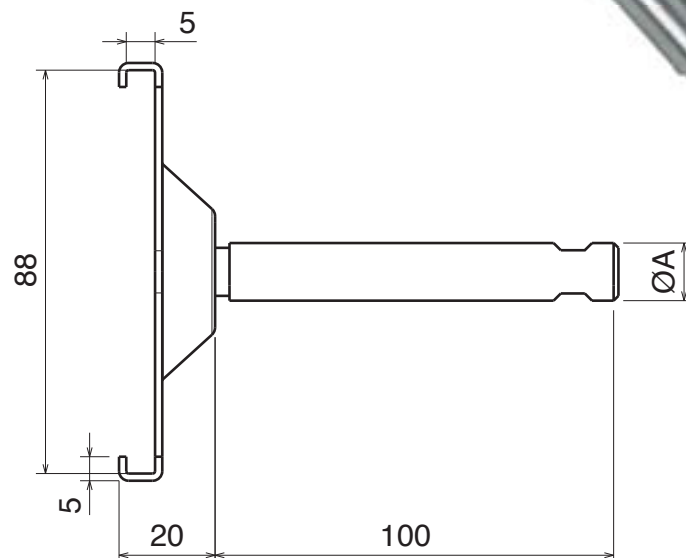

Materiale:	Material:	Materialien:
Morsetti: PA	Clamp: PA	Klemme: PA
Vite, perno e rondella: Acciaio inox	Screw, pin and washer: Stainless steel	Schraube, Bolzen und Scheibe: Edelstahl
Dado: ottone nichelato	Nut: nickel plated brass	Mutter: Messing vernickelt


Morsetto singolo per tondino / Single clamp for round bar / Einfachklemme für Rund Profil

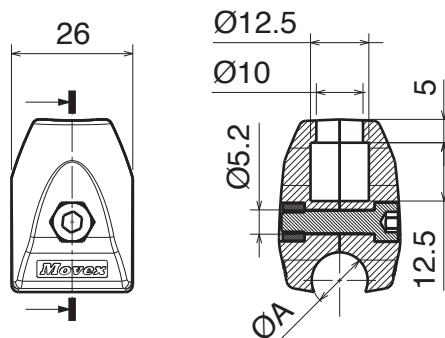

Part	Article-Nr.	ØA
337	33701	10
337	33702	12




Morsetto singolo per tondino / Single clamp for round bar / Einfachklemme für Rund Profil

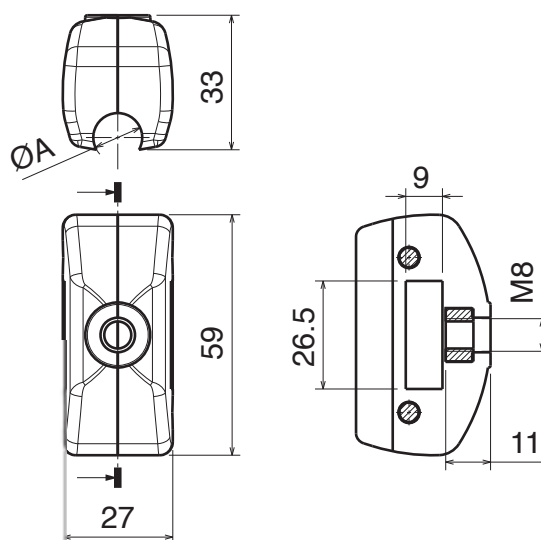

Part	Article-Nr.	ØA
338	33801	10
338	33802	12



Morsetto doppio per tondino / Double clamp for round bar / Doppelklemme für Rund Profil

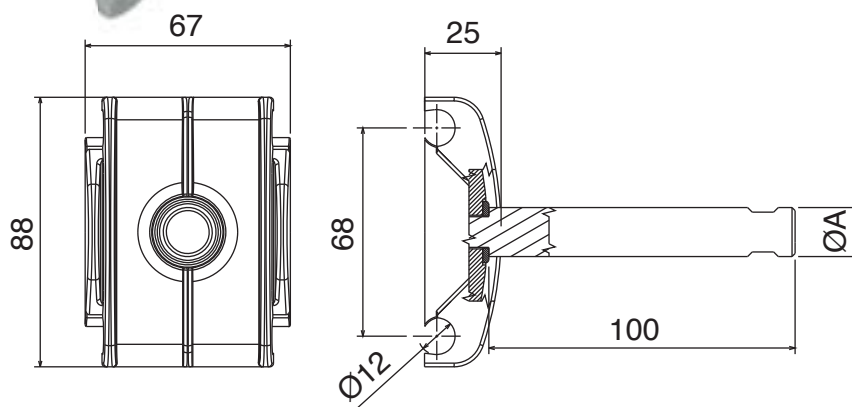

Part	Article-Nr.	ØA
339	33901	without pin
339	33902	12
339	33903	16


Materiale:	Material:	Materialien:
Acciaio inox	Stainless steel	Edelstahl

Perni
Rods
Bolzen

349-350-351-352


Perno / Rod / Bolzen

Part	Article-Nr.	A
349	34901	80
349	34902	100
349	34903	150

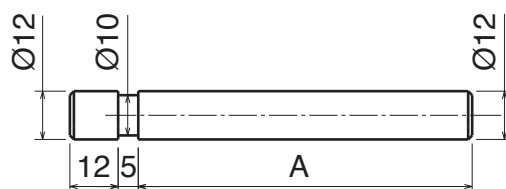


Perno / Rod / Bolzen

Part	Article-Nr.	A
350	35001	80
350	35002	100
350	35003	150

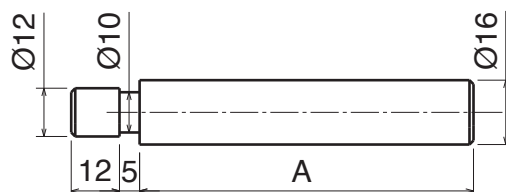


Perno / Rod / Bolzen

Part	Article-Nr.	A	B
351	35101	80	M10
351	35102	100	M10
351	35103	150	M10
351	35151	80	M8
351	35152	100	M8
351	35153	150	M8

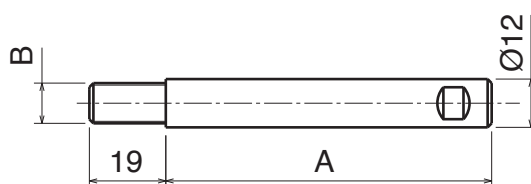

Perno / Rod / Bolzen

Part	Article-Nr.	A	B
352	35201	80	M10
352	35202	100	M10
352	35203	150	M10
352	35251	80	M8
352	35252	100	M8
352	35253	150	M8

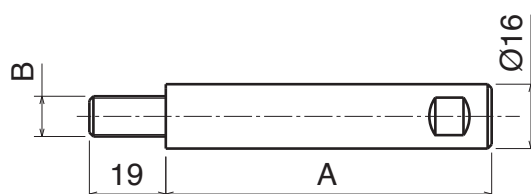

Materiale:
Acciaio inox


Material:
Stainless steel

Materialien:
Edelstahl




Perno filettato femmina / Rod / Bolzen

Part	Article-Nr.	A	B
347	34701	80	M10
347	34702	100	M10
347	34703	150	M10
347	34751	80	M8
347	34752	100	M8
347	34753	150	M8

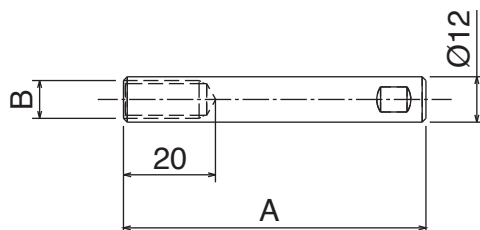

Perno filettato femmina / Rod / Bolzen

Part	Article-Nr.	A	B
348	34801	80	M10
348	34802	100	M10
348	34503	150	M10
348	34851	80	M8
348	34852	100	M8
348	34553	150	M8

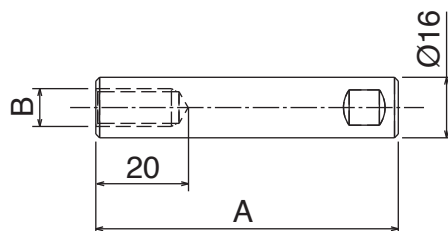


Materiale:	Material:	Materialien:
Acciaio inox	Stainless steel	Edelstahl

Snodo / Joint rod adapter / Gelenk



Part Article-Nr.


346 34601

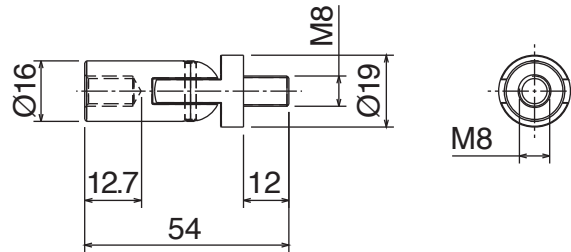

Perno snodato / Jointed rods / Gelenkbolzen




Part	Article-Nr.	A
356	35601	80
356	35602	100
356	35603	150

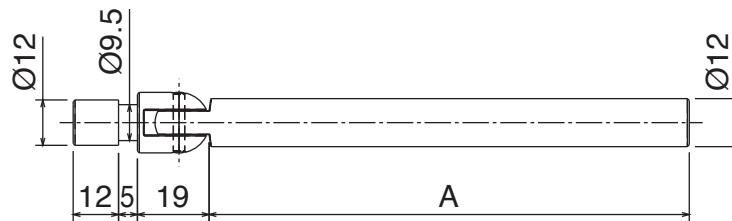

Perno snodato / Jointed rods / Gelenkbolzen



Part	Article-Nr.	A
357	35701	80
357	35702	100
357	35703	150

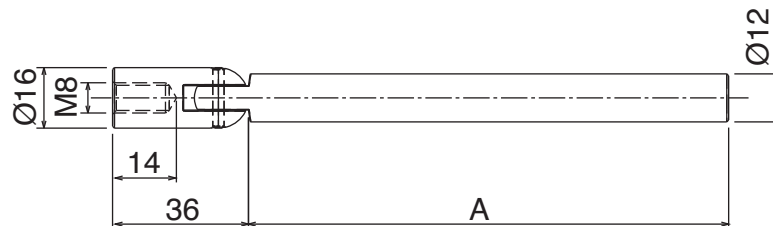


Materiale:	Material:	Materialien:
Guida: alluminio anodizzato	Guide: anodized aluminum	Führung: eloxiertem Aluminium
Rulli: resina acetale	Rollers: Acetal Resin	Röllchen: Azetal
Vite: Acciaio inox	Screw: Stainless steel	Schrauben: Edelstahl




Guide a rulli laterale / Roller guides / Röllchenführung

Part	Article-Nr.	Type
358	35802	A
358	35804	B

Max fixing load M8 screw: 15 N/m

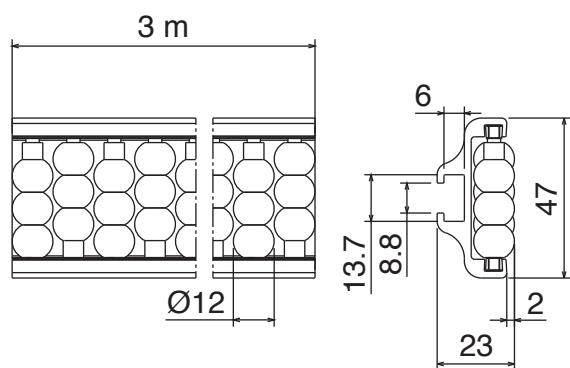

Type A

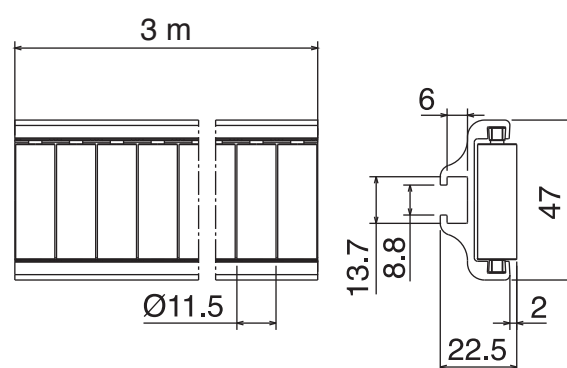

Type B

Puntale / Shoe / Einlaufschuh


Part	Article-Nr.	Type
364	36401	fresato/machined/gefräst
364	36411	stampato/molded/gespritzt




Guide a rulli laterale / Roller guides / Röllchenführung

Part	Article-Nr.	Type
359	35902	A
359	35904	B

Max fixing load M8 screw: 15 N/m

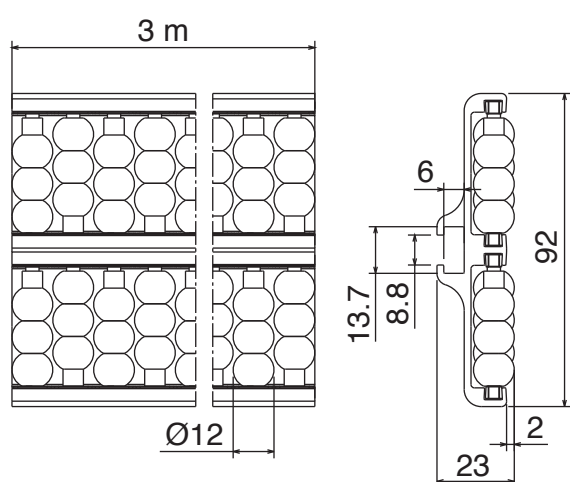

Type A

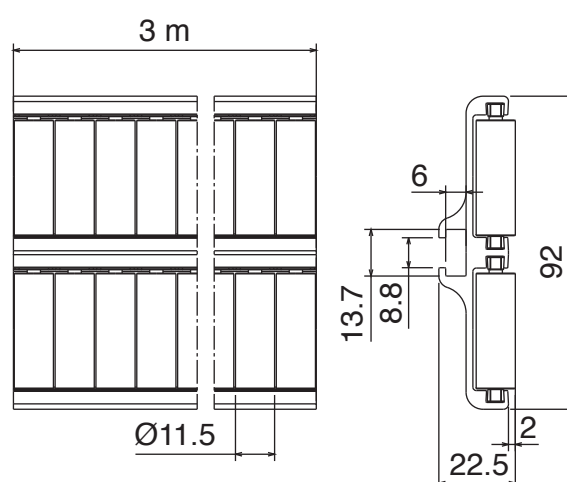

Type B

Puntale / Shoe / Einlaufschuh

Part	Article-Nr.	Type
365	36501	fresato/machined/gefräst
365	36511	stampato/molded/gespritzt




Materiale:	Material:	Materialien:
Guida: alluminio anodizzato	Guide: anodized aluminum	Führung: eloxiertem Aluminium
Rulli: resina acetilica	Rollers: Acetal Resin	Röllchen: Azetal

Guide a rulli intermedia / Roller guides / Röllchenführung





Part	Article-Nr.	Type
360	36002	A
360	36004	B


Max fixing load M8 screw: 15 N/m

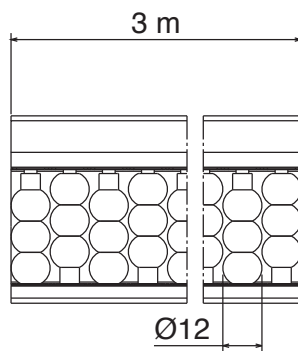

Type A

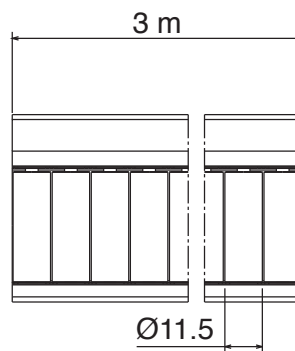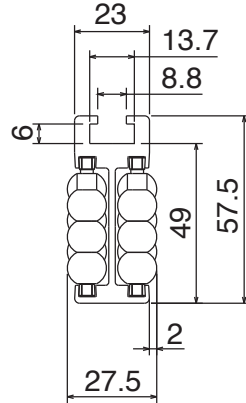

Type B

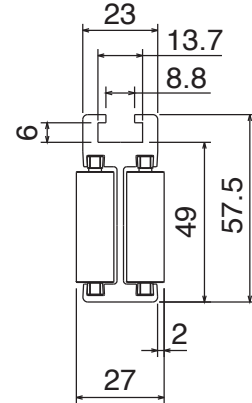

Puntale / Shoe / Einlaufschuh

Part	Article-Nr.	Type
366	36601	fresato/machined/gefräst
366	36611	stampato/molded/gespritzt




Guide a rulli intermedia / Roller guides / Röllchenführung





Part	Article-Nr.	Type
361	36102	A
361	36104	B


Max fixing load M8 screw: 15 N/m

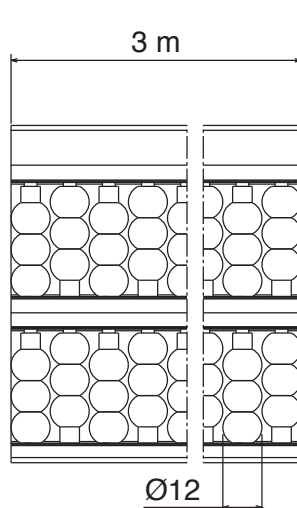

Type A

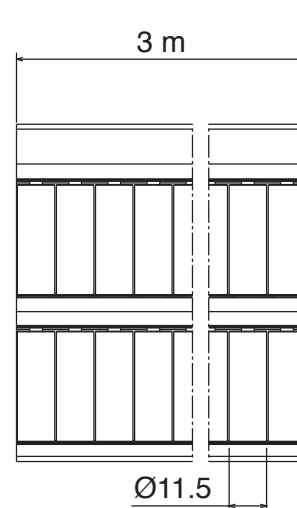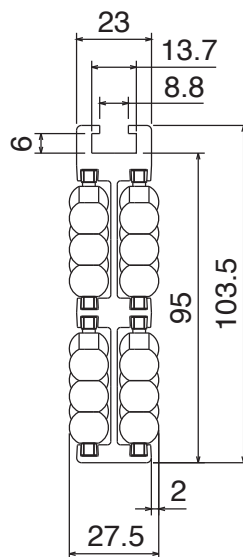

Type B

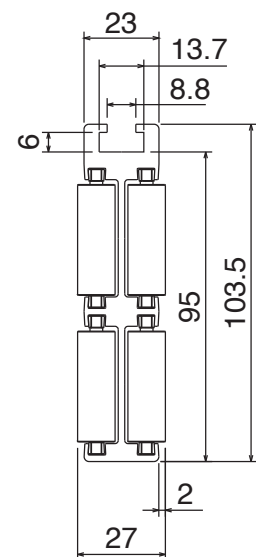

Puntale / Shoe / Einlaufschuh

Part	Article-Nr.	Type
367	36701	fresato/machined/gefräst
367	36711	stampato/molded/gespritzt




Materiale:	Material:	Materialien:
Puntale: PE HD	Shoe: PE HD	Corpus: PE HD
Perni: acciaio inox	Pins: SS	Bolzen: Edelstahl
Rulli: PE o acetilica	Rollers: PE or acetal resin	Röllchen: PE oder Azetal




Puntale centrale a rulli / Central roller shoe / Einlaufschuh mitting

PATENT
PENDING

Part	Article-Nr.	Type
366	36621	A
366	36622	B

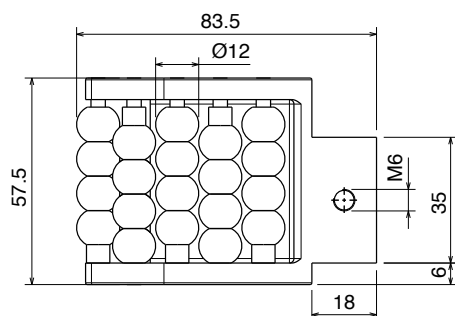

Type A

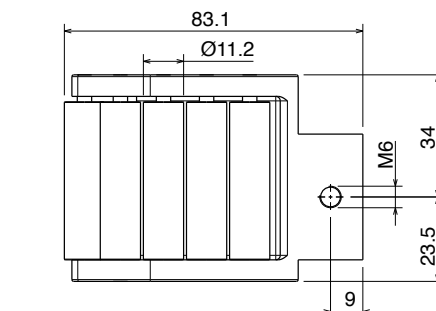


Type B




PATENT
PENDING

Part	Article-Nr.	Type
367	36721	A
367	36722	B

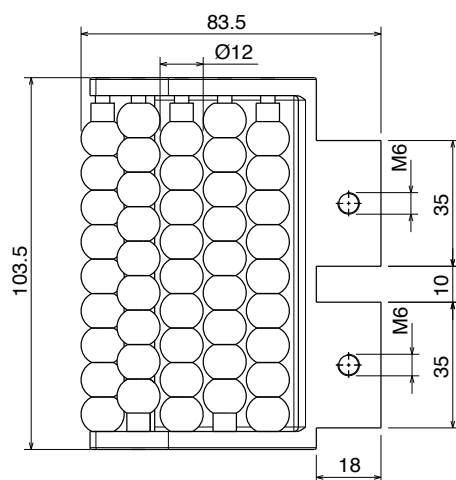

Type A

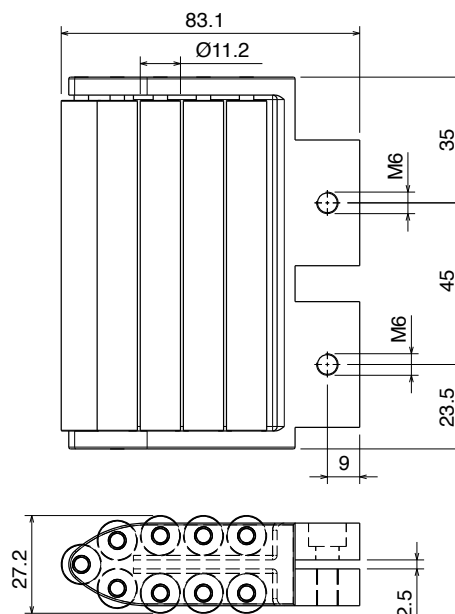


Type B

Materiale:	Material:	Materialien:
Puntale: PE HD	Shoe: PE HD	Corpus: PE HD
Perni: acciaio inox	Pins: SS	Bolzen: Edelstahl
Rulli: PE o acetalica	Rollers: PE or acetal resin	Röllchen: PE oder Azetal


Puntale laterale a rulli / Side roller shoe / Einlaufschuh seitlich

Part	Article-Nr.	Type
364	36421	A
364	36422	B

PATENT
PENDING

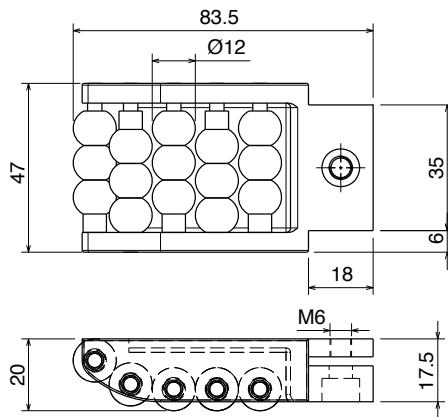


Type A

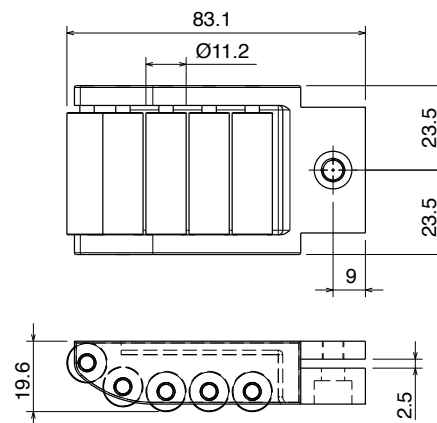


Type B

Part	Article-Nr.	Type
365	36521	A
365	36522	B

PATENT
PENDING

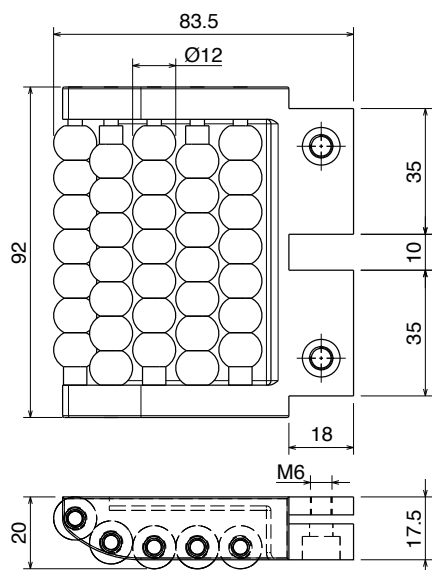

Type A

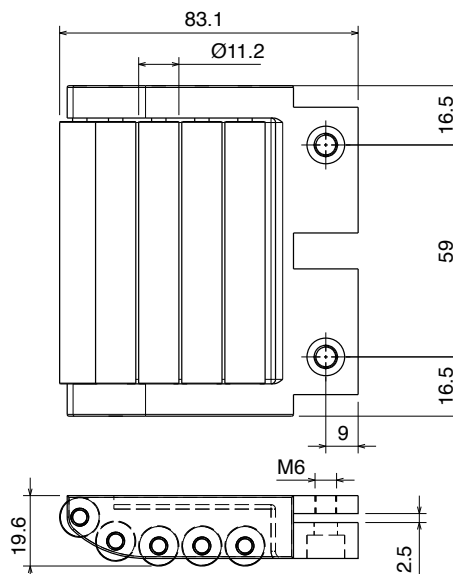


Type B

Materiale:	Material:	Materialien:
Profilo: PE	Profile: PE	Profil: PE
Guide: Alluminio	Guides: Aluminum	Führungen: Aluminium
Elemento di giunzione: Acciaio inox	Connecting elements: stainless steel	Verbindungselement: Edelstahl



Guida laterale in PE / PE side guides / Seitenführung in PE




Part	Article-Nr.	L
------	-------------	---

395	39501	3m
-----	-------	----



Vite a "T" / T-bolt / T-Schraube

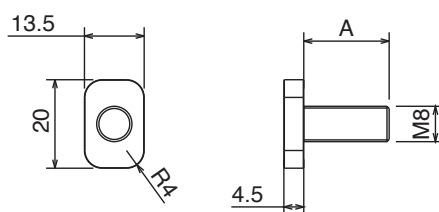


Part	Article-Nr.	A
------	-------------	---


362	36201	16
362	36202	19
362	36203	25




Guide in alluminio / Aluminum guides / Aluminiumführung




35800

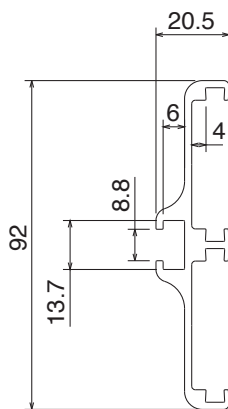

35900

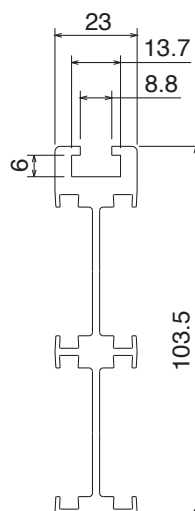

36100



36000

Part	Article-Nr.	Version	Min. radius
------	-------------	---------	-------------



358	35800	Single-lateral	250
359	35900	Double-lateral	500
360	36000	Single-central	500
361	36100	Double-central	750



Elemento di giunzione / Connecting elements / Verbindungselement

Part	Article-Nr.
------	-------------


333	33301
-----	-------

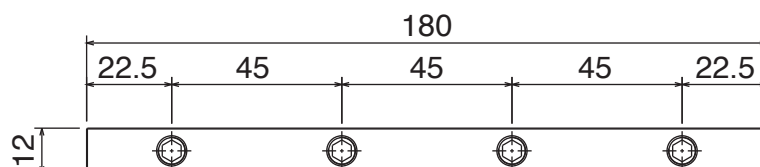

Materiale:	Material:	Materialien:
Profilo metallico e viti: Acciaio inox	Metal Profile and screws: Stainless steel	U-Schiene und Schrauben: Edelstahl
Modulo di connessioni: PA	Connection module: PA	Module: PA
Rulli: resina acetica	Rollers: Acetal Resin	Röllchen: Azetal


Guide a rulli di accumulo / Accumulation roller guides / Stauröllchenführung

Part	Article-Nr.	A	Pin
353	35301	1 m	PA
353	35302	2 m	PA
353	35303	3 m	PA

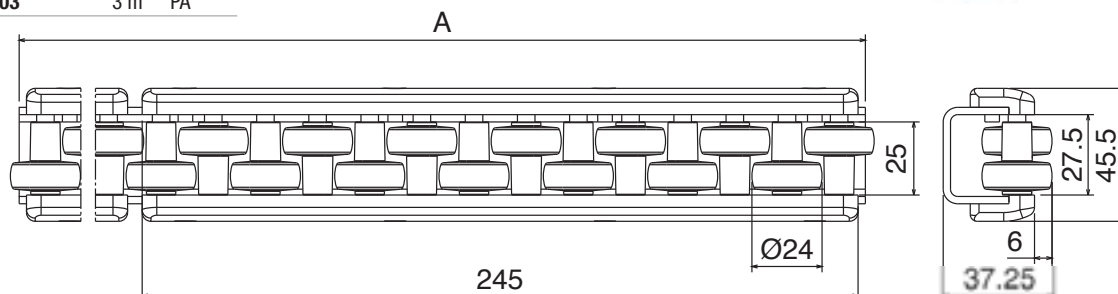


Guide a rulli di accumulo / Accumulation roller guides / Stauröllchenführung

Part	Article-Nr.	A	Pin
354	35401	1 m	PA
354	35402	2 m	PA
354	35403	3 m	PA

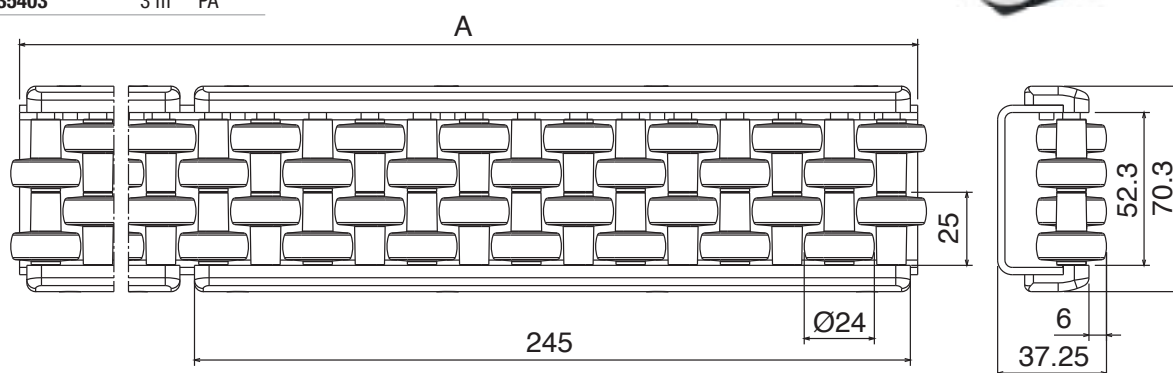

Guide a rulli di accumulo / Accumulation roller guides / Stauröllchenführung


Part	Article-Nr.	A	Pin
355	35501	1 m	SS
355	35502	2 m	SS
355	35503	3 m	SS

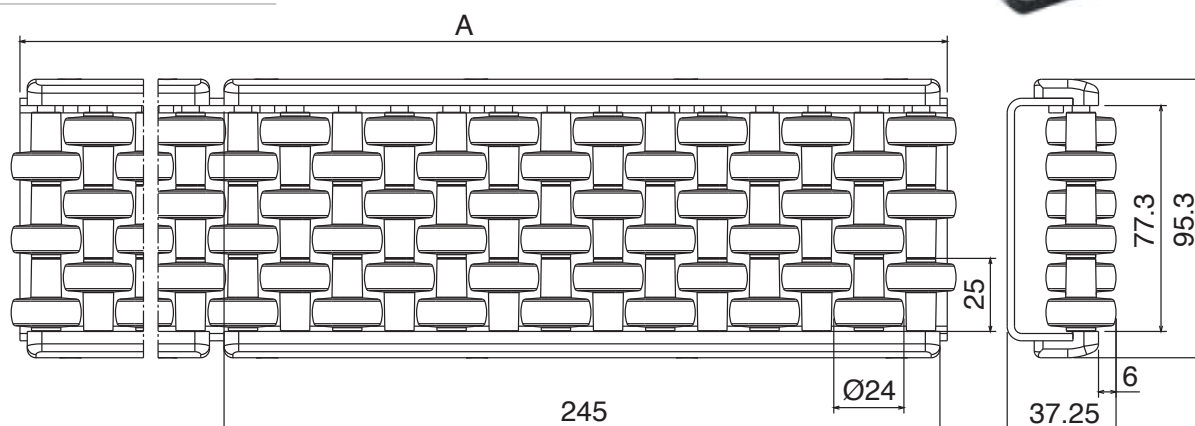




Guida a rulli flessibile / Flexible roller guide / Flexible Röllchenführung


Part	Article-Nr.	Type	A
363	36301	A	8
363	36302	B	8
363	36303	A	10
363	36304	B	10

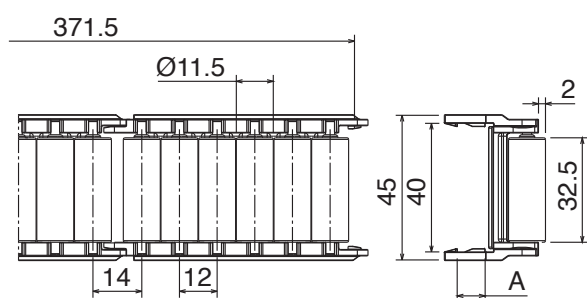

Type A

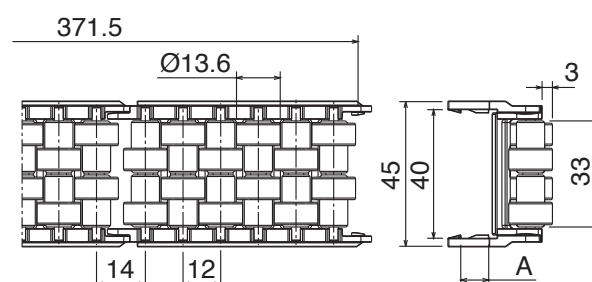

Type B


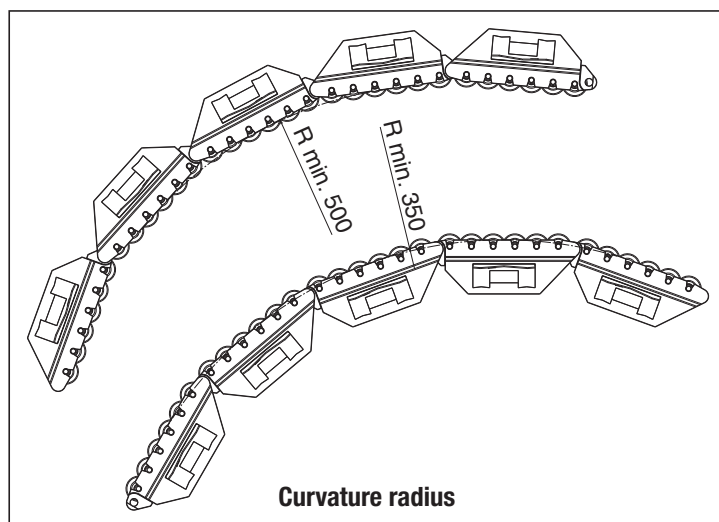


Curvature radius

Fixing with plate

- 40x8
- 40x10

Fixing with metal


Part.
117

Fixing with plate and metal profile


Materiale:	Material:	Materialien:
Resina acetallica	Acetal Resin	Azetal

Guida a rulli flessibile / Flexible roller guide / Flexible Röllchenführung


Part	Article-Nr.	Type
396	39601	A
396	39602	B

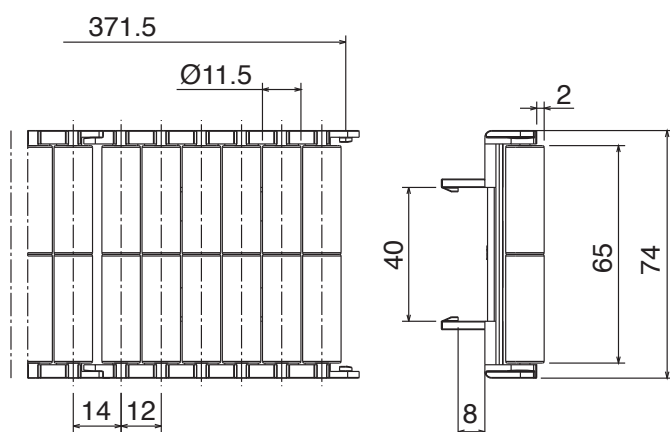

Type A

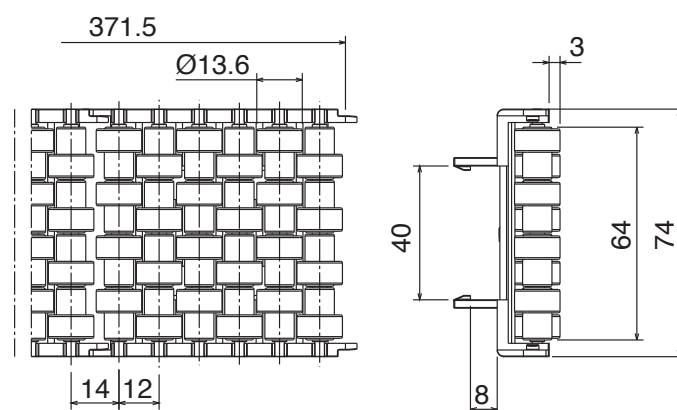

Type B

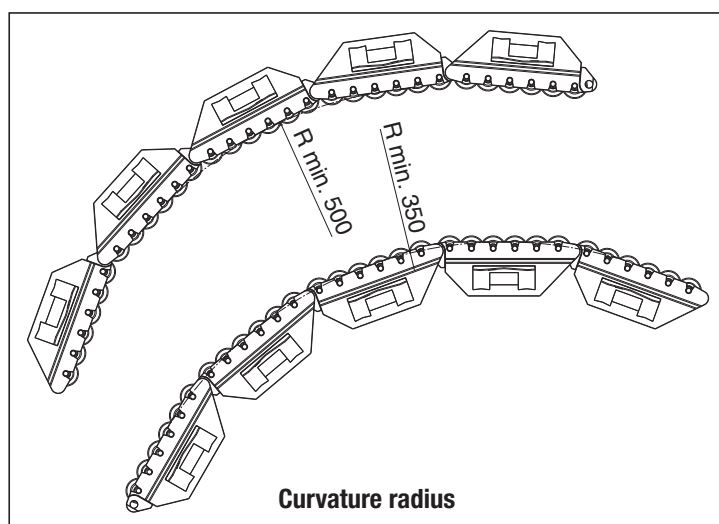


Curvature radius

Fixing with plate

40x8

Fixing with metal

Part.
117

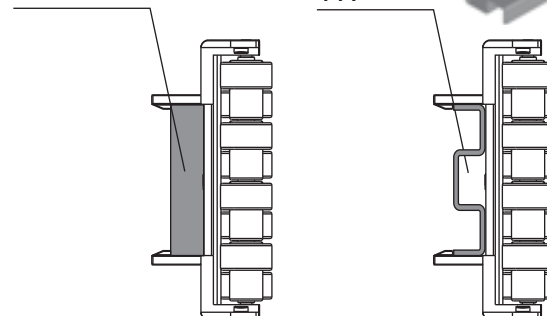


Fixing with plate and metal profile

Materiale:	Material:	Materialien:
Modulo: resina acetica	Moduls: acetal resin	Module: Azetal
Perni, viti e dadi: Acciaio inox	Pins, screws and nuts: Stainless steel	Bolzen, Schraube und Mutter: Edelstahl
Rulli: resina acetica o acciaio inox	Rollers: acetal resin or stainless steel	Rolle: Azetal oder Edelstahl



Moduli di trasferimento L=85 mm / Transfer modules L=85 mm / Überschubmodul L=85 mm

Part	Article-Nr.	Type	Roller material
368	36801	A	Acetal resin
368	36802	B	Acetal resin
368	36803	C	Acetal resin
368	36801SS	A	Stainless steel
368	36802SS	B	Stainless steel
368	36803SS	C	Stainless steel

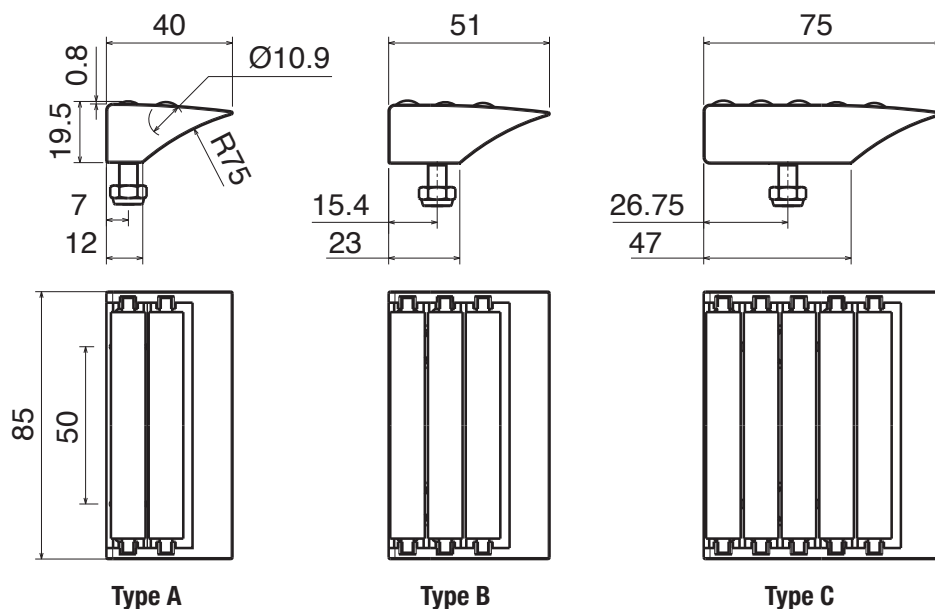


Smart Roll
with mini bearing
in stainless steel



Moduli di trasferimento L=115 mm / Transfer modules L=115 mm / Überschubmodul L=115 mm

Part	Article-Nr.	Type	Roller material
369	36901	A	Acetal resin
369	36902	B	Acetal resin
369	36903	C	Acetal resin
369	36901SS	A	Stainless steel
369	36902SS	B	Stainless steel
369	36903SS	C	Stainless steel

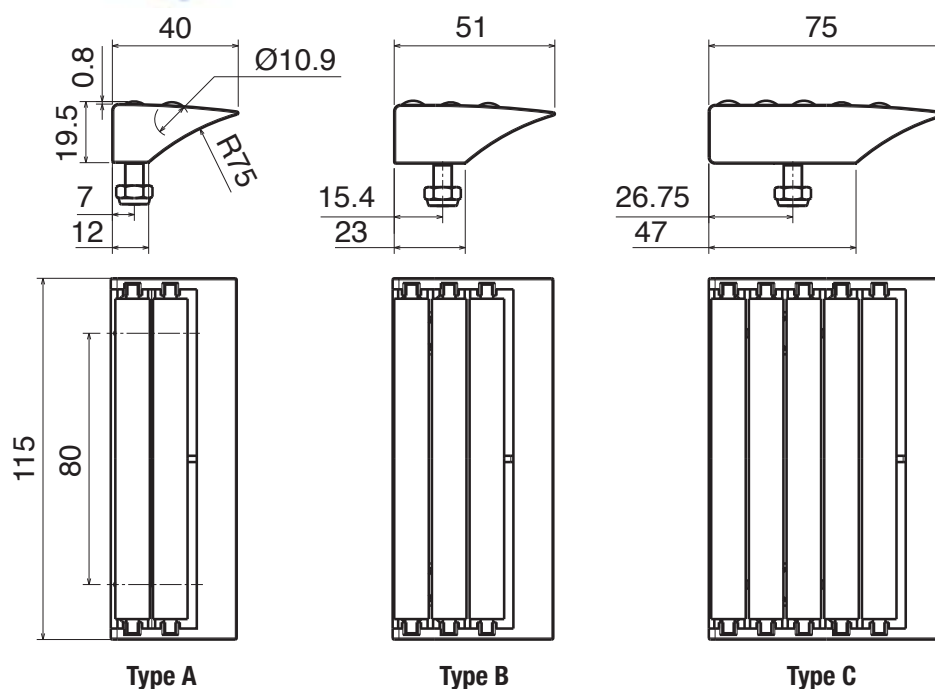


Smart Roll
with mini bearing
in stainless steel



Materiale:	Material:	Materialien:
Modulo e rulli: resina acetica	Moduls and rollers: acetal resin	Module und Rolle Azetal
Perni, viti e dadi: Acciaio inox	Pins, screws and nuts: Stainless steel	Bolzen, Schraube und Mutter: Edelstahl


Moduli di trasferimento L=85 mm / Transfer modules L=85 mm / Überschubmodul L=85 mm

Part	Article-Nr.	Type
370	37001	A
370	37002	B
370	37003	C

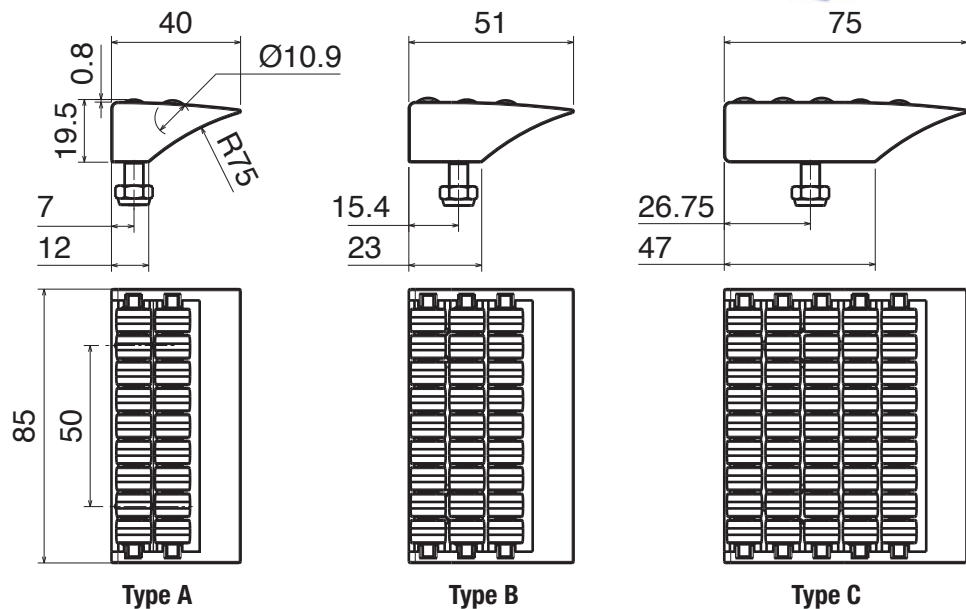

Moduli di trasferimento L=115 mm / Transfer modules L=115 mm / Überschubmodul L=115 mm

Part	Article-Nr.	Type
371	37101	A
371	37102	B
371	37103	C


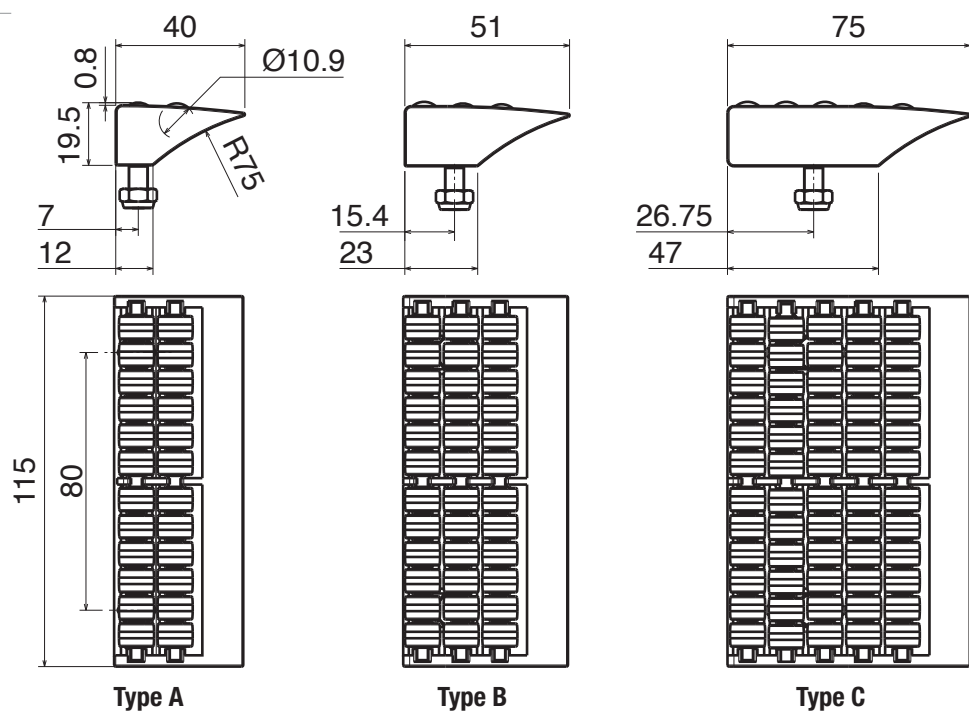


Materiale:	Material:	Materialien:
Cerniera: Poliammide	Hinges: Polyamide	Scharnier: Polyamid
Perni: Acciaio inox	Pins: Stainless steel	Bolzen: Edelstahl





Cerniera / Hinge / Scharnier

Part	Article-Nr.	A	B	C	D	E
372	37201	11	14	10,5	6,5	6
372	37202	11	14	13,5	8,5	8
372	37203	18	21	13,5	8,5	8

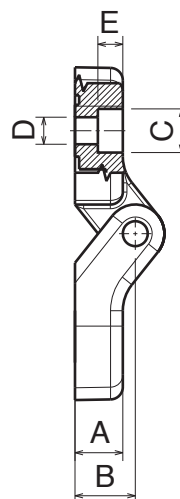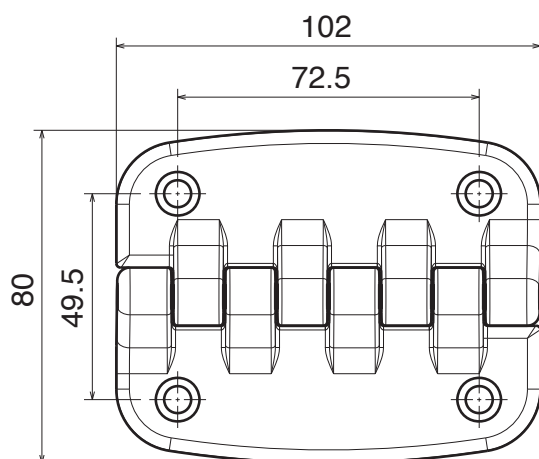

Cerniera / Hinge / Scharnier

Part	Article-Nr.	C	D	E
373	37301	10,5	6,5	6
373	37302	13,5	8,5	4

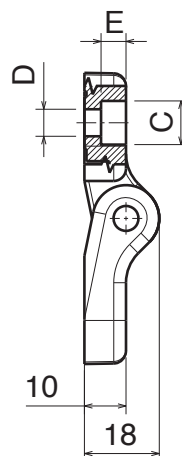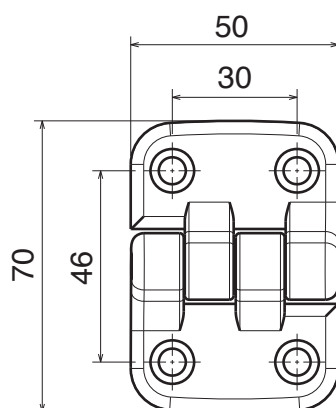


Materiale:	Material:	Materialien:
Cerniera: Poliammide o Acciaio inox	Hinges: Polyamide or Stainless steel	Scharnier: Polyamid oder Edelstahl

Cerniera / Hinge / Scharnier




Part	Article-Nr.	A	B	C	ØD	ØE	F	G
383	38301	24	25	14,5	4,5	14	44,6	41
383	38302	36	36	20,8	6,5	20	62,5	58

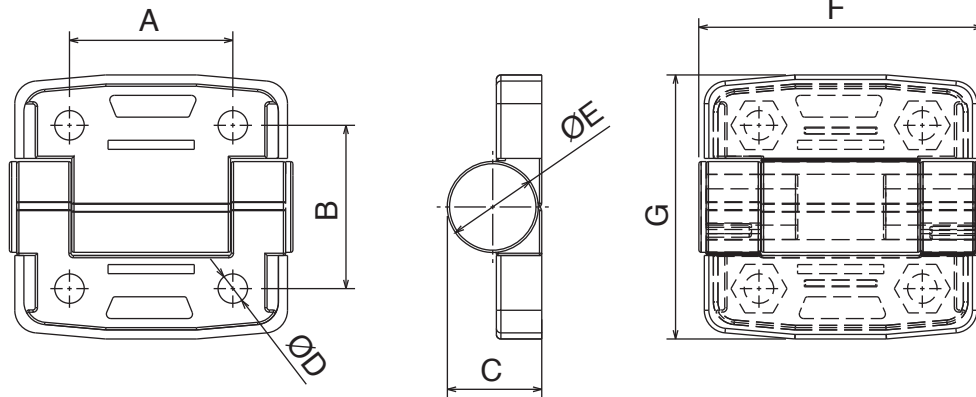

Cerniera Acciaio Inox / SS Hinge / Edelstahl Scharnier



Part	Article-Nr.	A	B	C	ØD	ØE	F	G
384	38401	20	32,5	4,3	5,5	10,5	40	51
384	38402	30	41	5	6,5	12,5	60	71

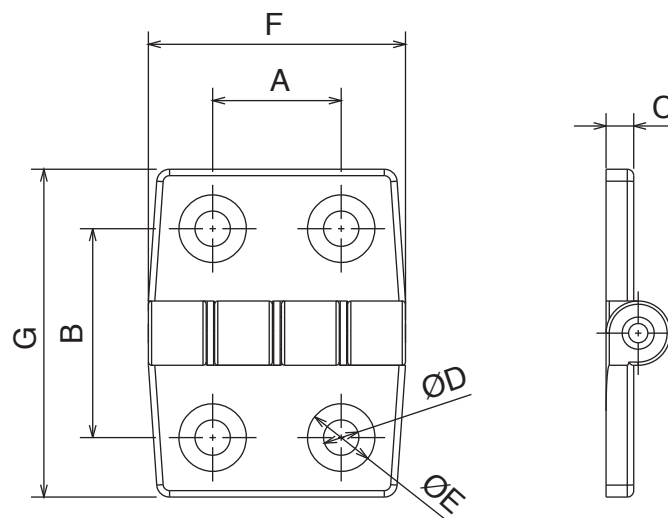


Materiale:
Poliammide
o Acciaio Inox

Material:
Polyamide
or Stainless Steel

Materialien:
Polyamid
oder Edelstahl



Maniglia ad impugnatura morbida / Soft touch handle / Handgriffe "Soft Touch"

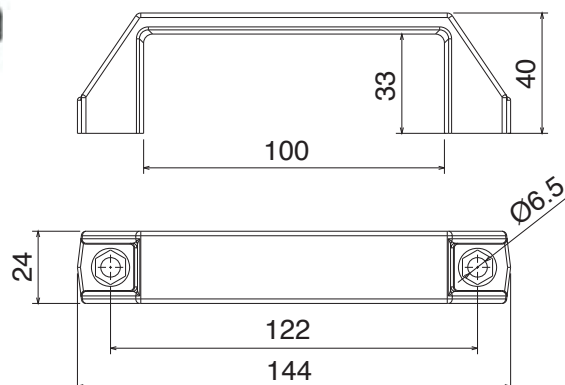


Part	Article-Nr.
385	38501




Maniglia / Handle / Handgriff

Part	Article-Nr.	A	B	C	Ød	ØD	E	F
386	38601	120	140	40	8,8	13	24,5	16
386	38602	160	185	48	8,8	15	29	16

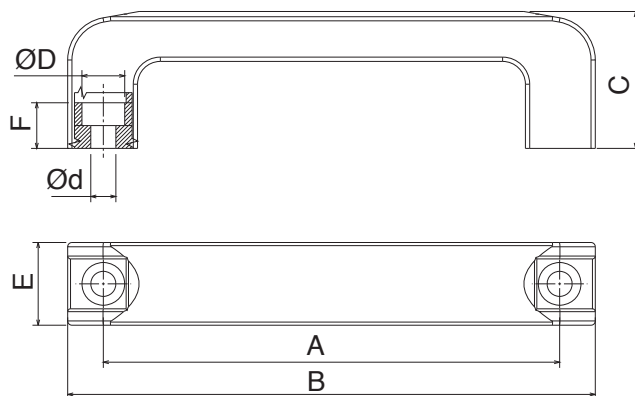

Maniglia acciaio inox / Stainless Steel handle / Handgriffe Edelstahl

Part	Article-Nr.	A
397	39701	95
397	39702	100
397	39703	110

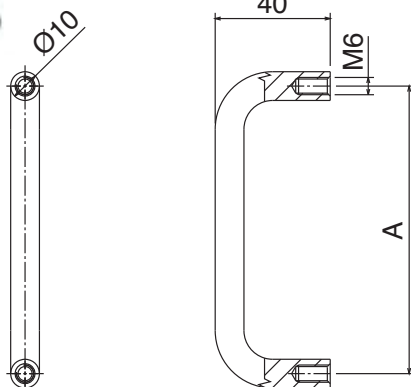


Stainless steel
AISI 304

Materiale:	Material:	Materialien:
Morsetti: Poliammide	Handels: Polyamide	Griff: Polyamid
Inserto femmina: ottone nichelato	Female insert: Nickel plated brass	Einsatz: Messing vernickelt
Inserto maschio: Acciaio inox	Male insert: Stainless steel	Aussengewinde: Edelstahl


Maniglia a ripresa / Adjustable handle / Ratschenhebel

Part	Article-Nr.	A	B	C	D	E
374	37401	75	41	13	M8	11
374	37402	92	53	16	M10	16

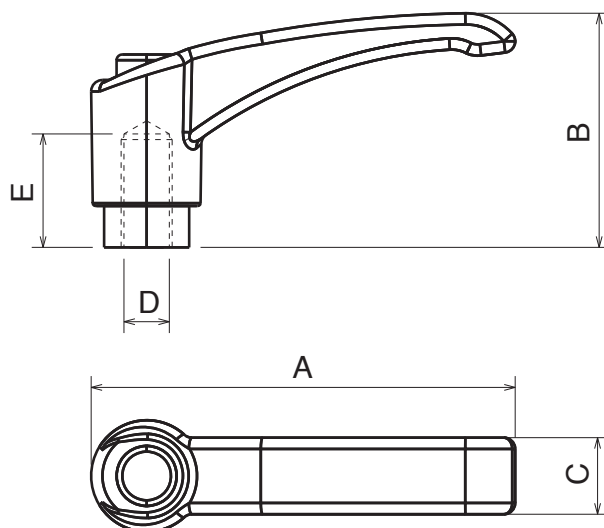

Maniglia a ripresa / Adjustable handle / Ratschenhebel


Part	Article-Nr.	A	B	C	D	E
375	37501	75	41	13	M8	20
375	37502	92	53	16	M10	25

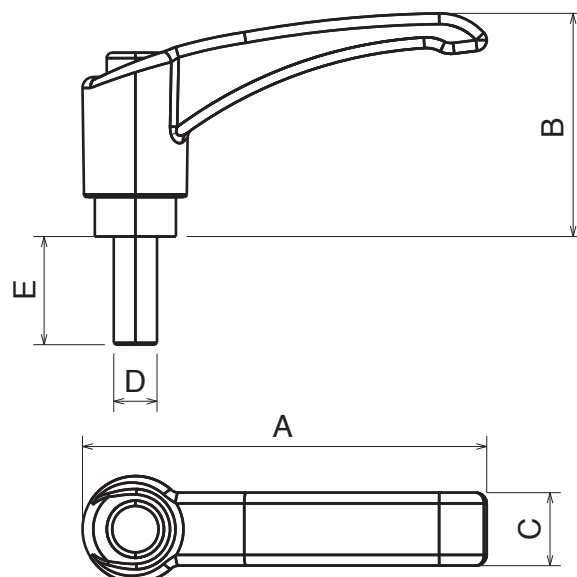

Materiale:	Material:	Materialien:
Morsetti: Poliammide	Clamps: Polyamide	Klemme: Polyamid
Viti e dadi: Acciaio inox	Screws and nuts: Stainless steel	Schraube und Mutter: Edelstahl




Morsetto standard per fotocellula o riflettore / Clamp for photocells or reflector / Klemme für Fotozelle oder Reflektor

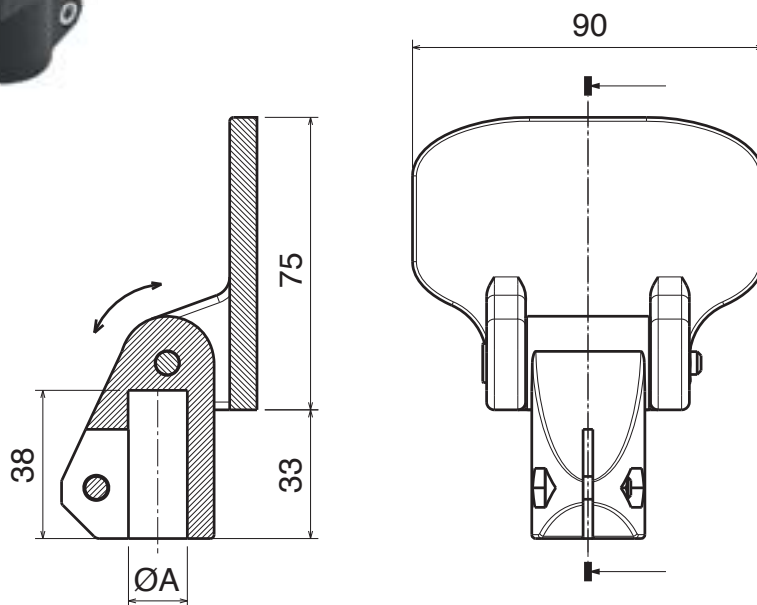

Part	Article-Nr.	ØA
377	37701	14
377	37702	16
377	37703	20



Morsetti "T" / T-clamp / T-Klemme

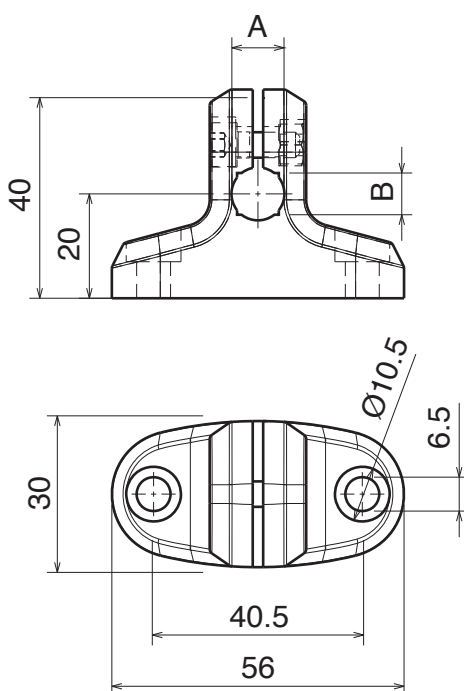


Part	Article-Nr.	A	B
378	37801	10	8
378	37802	12	10
378	37803	14	12

Materiale:	Material:	Materialien:
Morsetti: Poliammide	Clamps: Polyamide	Klemme: Polyamid
Viti e dadi: Acciaio inox	Screws and nuts: Stainless steel	Schraube und Mutter: Edelstahl


Morsetto per riflettore / Clamp for reflector / Reflektorklemme

Part	Article-Nr.	A	B
379	37901	10	8
379	37902	12	10
379	37903	14	12

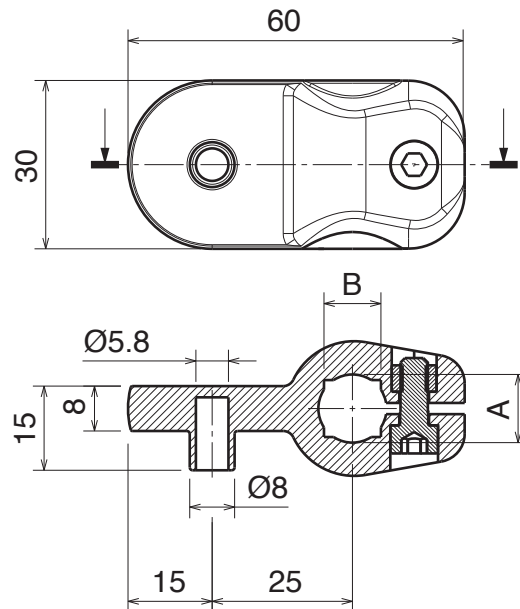

Morsetto per fotocellule o sensori / Clamp for photocells or sensors / Klemme für Lichtschranke oder Sensoren

Part	Article-Nr.	A	B
380	38001	10	8
380	38002	12	10
380	38003	14	12

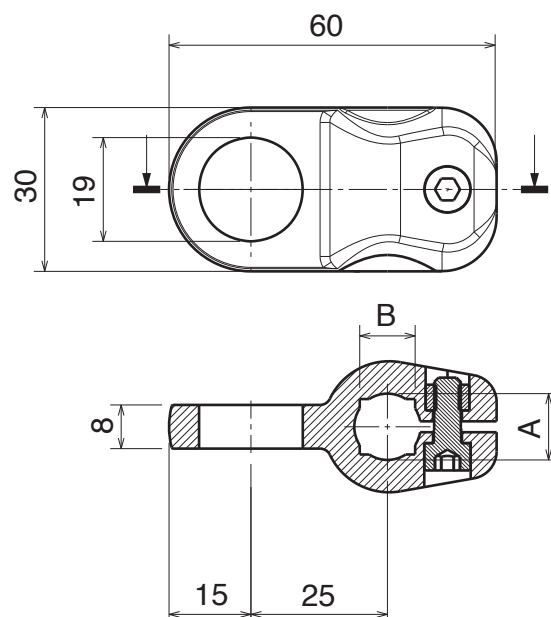


Materiale:	Material:	Materialien:
Morsetti: Poliammide	Clamps: Polyamide	Klemme: Polyamid
Viti e dadi: Acciaio inox	Screws and nuts: Stainless steel	Schraube und Mutter: Edelstahl




Morsetto a croce / Cross clamp / Kreuzklemme

Part	Article-Nr.	A	B	C	D
381	38101	14	12	14	12
381	38102	16	14	16	14
381	38103	18	—	18	—
381	38104	20	16	20	16

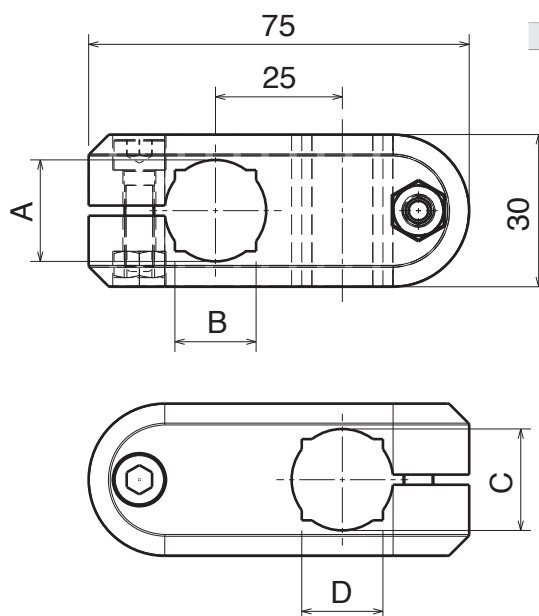

Morsetto a croce / Cross clamp / Kreuzklemme


Part	Article-Nr.	A	B	C	D
382	38201	10	8	10	8
382	38202	12	10	12	10
382	38203	14	12	14	12

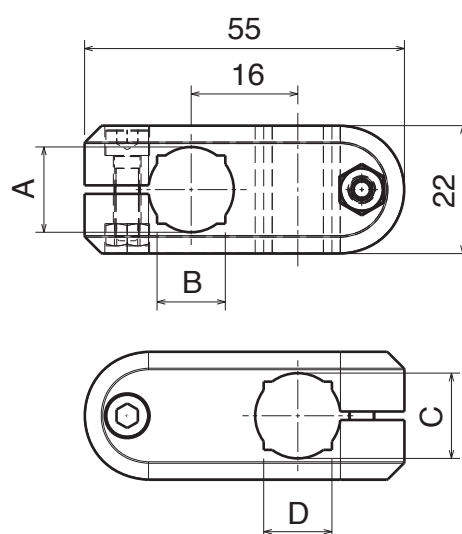

Materiale:	Material:	Materialien:
Volantino: PA+ ottone nichelato	Knob: PA+ nickel plated brass	Stengriff: PA+ messing vernickelt
Tirante e rondella: Acciaio inox	Eyebolt and washer: Stainless steel	Augenschraube und Unterlegs: Edelstahl
Corpo: PA	Body: PA	Korpus: PA

Morsetto a croce "extra" / Extra Cross Block / Kreuzklemme "Extra"


Part	Article-Nr.	A	B
376	37601	30x30	16
376	37602	40x40	16
376	37603	40x40	20

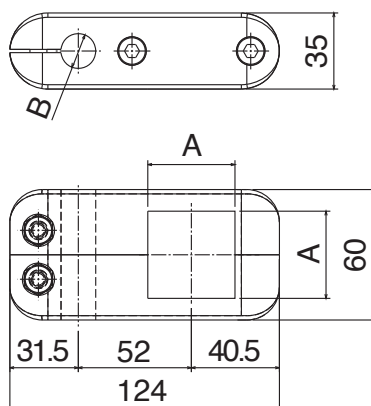

New

Morsetto a croce "extra" con maniglia / Extra Cross Block with handle / Kreuzklemme "Extra" m. Ratschenhebel


Part	Article-Nr.	A	B
376	37611	30x30	16
376	37612	40x40	16
376	37613	40x40	20

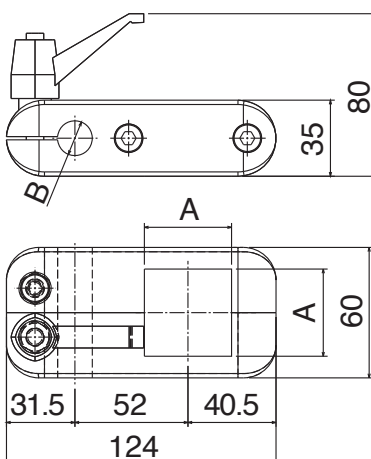

New

Morsetto a croce "extra" con maniglie / Extra Cross Block with handles / Kreuzklemme "Extra" m. Ratschenhebel

Part	Article-Nr.	A	B
376	37621	30x30	16
376	37622	40x40	16
376	37623	40x40	20

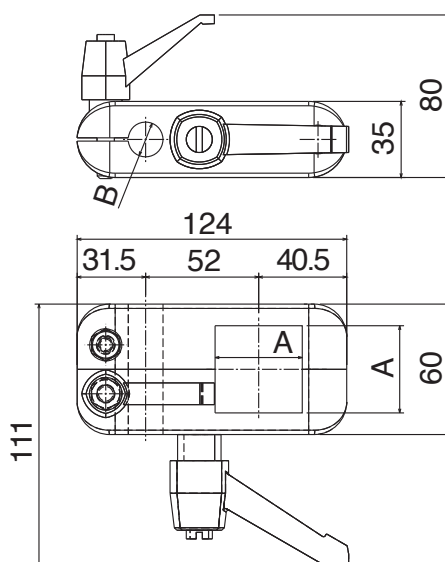


New



Materiale:	Material:	Materialien:
Volantino: PA+ ottone nichelato	Knob: PA+ nickel plated brass	Stengriff: PA+ messing vernickelt
Tirante e rondella: Acciaio inox	Eyebolt and washer: Stainless steel	Augenschraube und Unterlegs: Edelstahl
Corpo: PA	Body: PA	Korpus: PA

Morsetto a croce / Cross Block / Kreuzblock


Part	Article-Nr.	ØA	ØB
391	39101	12	12
391	39102	16	16

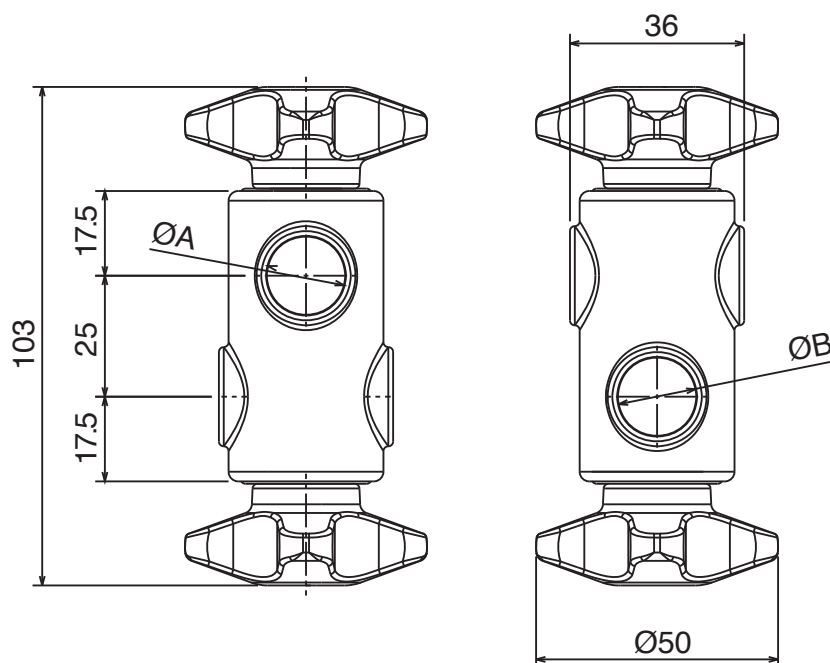


Materiale:	Material:	Materialien:
Supporto: Acciaio inox	Support: Stainless steel	Halter: Edelstahl
Morsetto: PA	Clamps: PA	Klemme: PA

Sostegno per Sgocciolatoio / Drip Tray Supports / Tropfblechhalter


Part	Article-Nr.	L	Type
387	38701	180	A
387	38702	250	A
387	38703	180	B
387	38704	250	B
387	38705	280	B
387	38706	246	C
387	38707	396	C

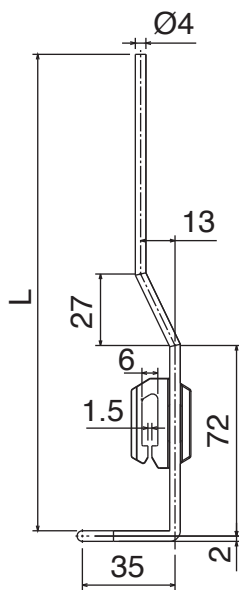


Type A

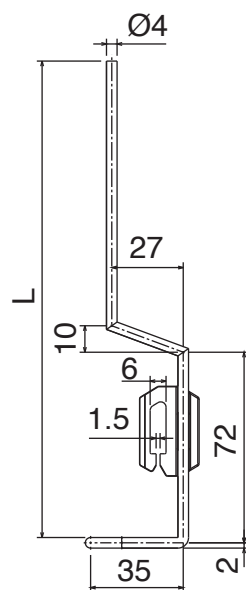

Type B

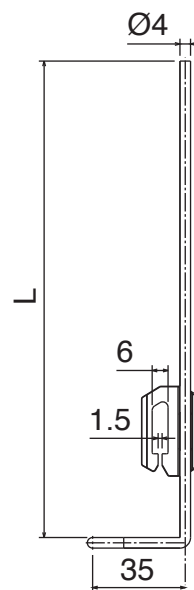


Type C



Rondella di fissaggio / Fixing washer / Fixierscheibe

Part	Article-Nr.
388	38801

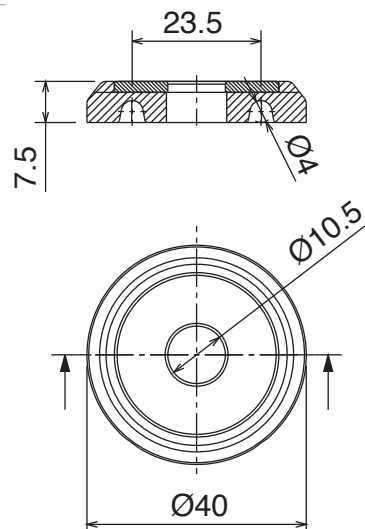







Materiale:	Material:	Materialien:
Basi: Poliammide	Base: Polyamide	Halter: Polyamid
Viti e rondelle:	Screws and washers:	Schrauben und Scheibe
Acciaio inox	Stainless steel	Edelstahl
Inserti e dadi:	Inserts nuts:	Mutter:
ottone nichelato	nickel plated brass	Messing vernickelt





Base a due braccia / Bipod / Zweibeinhalter

Part	Article-Nr.	ØA
401	40101	48,3
401	40105	50,9
401	40102	60,3

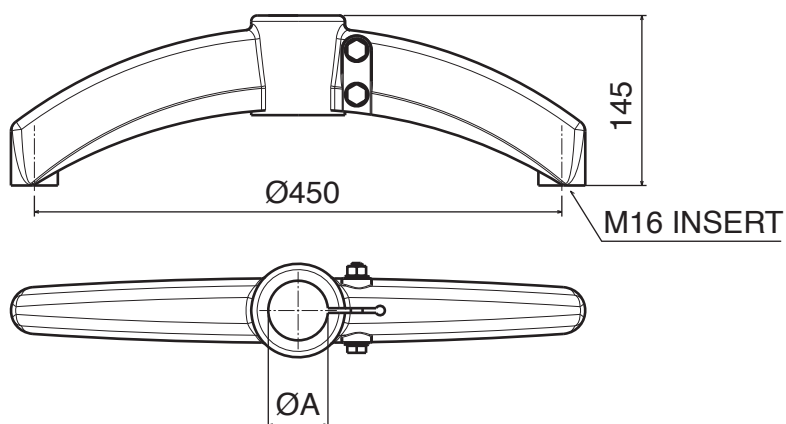

Base a due braccia 180° con giunto / Bipod 180° with connector / Zweibeinhalter 180° m. Verbinder




Part	Article-Nr.	ØA	ØB
402	40201	48,3	48,3
402	40205	50,9	48,3
402	40202	60,3	48,3
402	40203	48,3	42,4
402	40206	50,9	42,4
402	40204	60,3	42,4

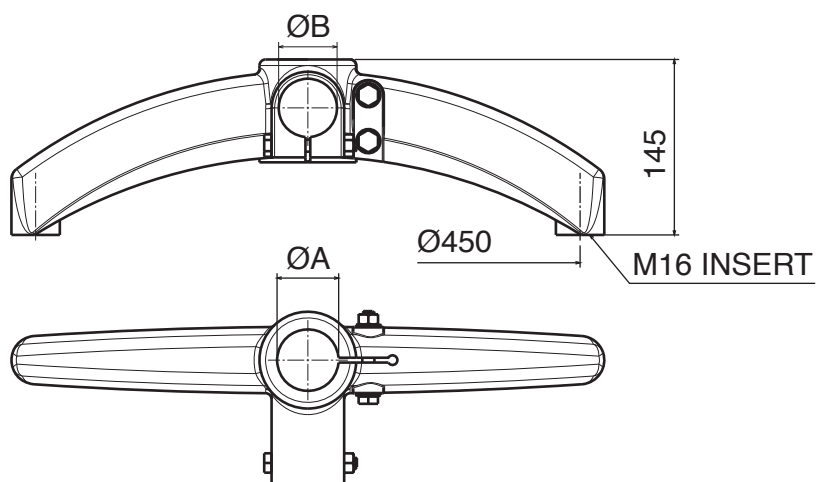

Materiale:	Material:	Materialien:
Basi: Poliammide	Base: Polyamide	Halter: Polyamid
Viti e rondelle: Acciaio inox	Screws and washers: Stainless steel	Schrauben und Scheibe Edelstahl
Inserti e dadi: ottone nichelato	Inserts nuts: nickel plated brass	Mutter: Messing vernickelt




Base a due braccia 120° con giunto / Bipod 120° with connector / Zweibeinhalter 120° m. Verbinder

Part	Article-Nr.	ØA	ØB
403	40301	48,3	48,3
403	40305	50,9	48,3
403	40302	60,3	48,3
403	40303	48,3	42,4
403	40306	50,9	42,4
403	40304	60,3	42,4

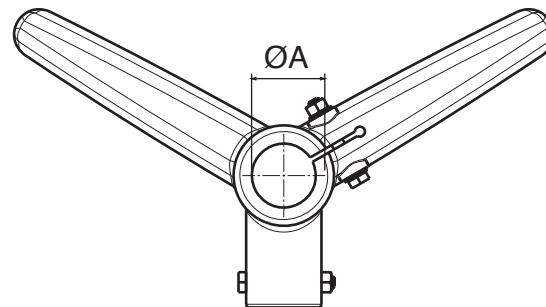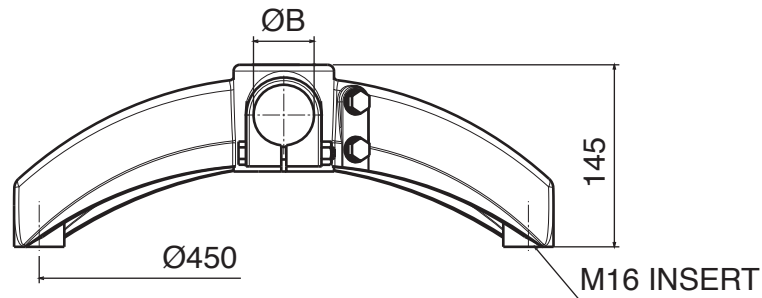

Base a tre braccia / Tripod / Dreibeinhalter


Part	Article-Nr.	ØA
404	40401	48,3
404	40405	50,9
404	40402	60,3

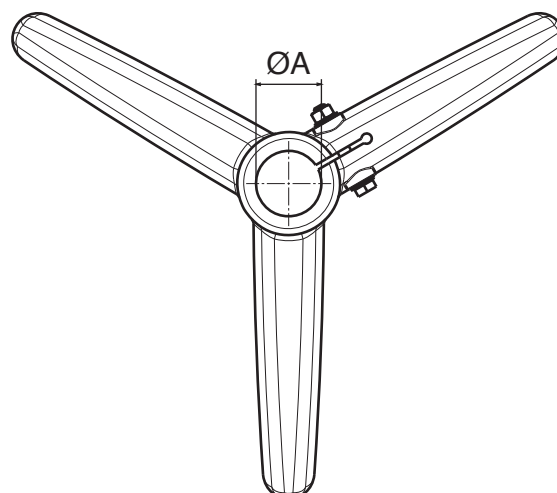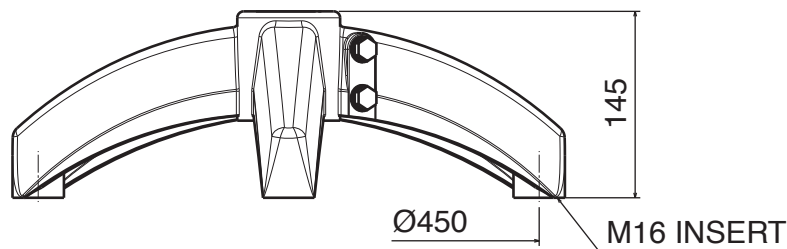

Materiale:	Material:	Materialien:
Testata: Poliammide	Side bracket: Polyamide	Halter: Polyamid
Viti e rondelle:	Screws and washers:	Schrauben und Scheibe
Acciaio inox	Stainless steel	Edelstahl
Dadi: ottone nichelato	Nuts: nickel plated brass	Mutter: Messing vernickelt




Testata laterale / Side mounting top bracket / seitlicher Stützkopf

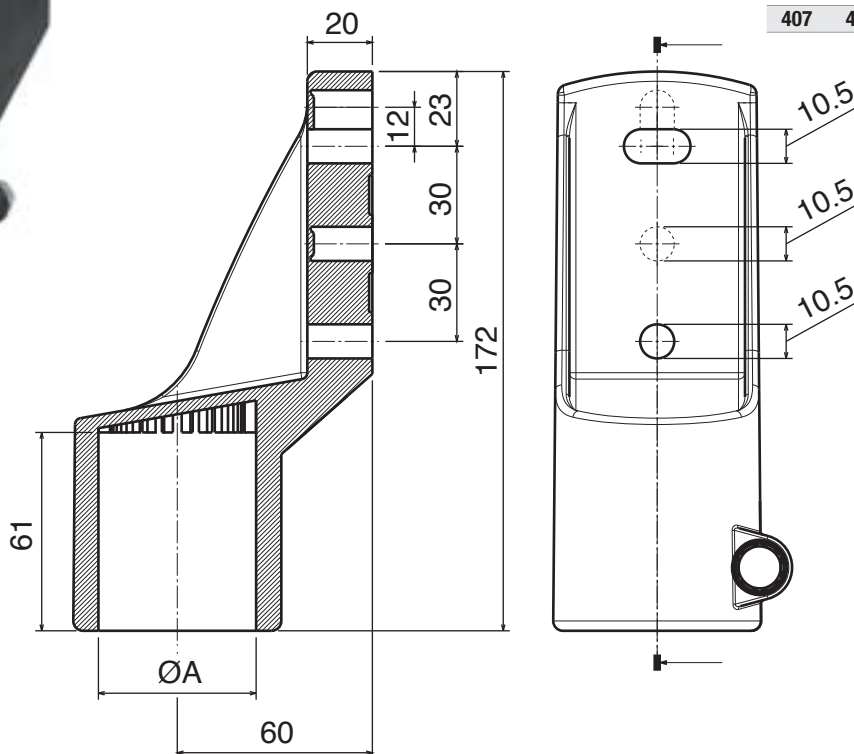

Part	Article-Nr.	ØA
407	40701	48,3
407	40702	50,9



Testata laterale / Side mounting top bracket / seitlicher Stützkopf

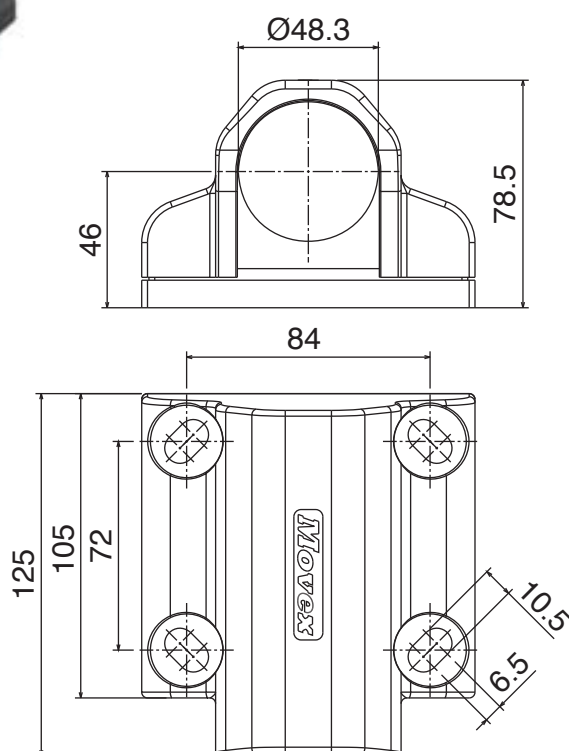


Part	Article-Nr.
408	40801

Materiale:	Material:	Materialien:
Testata: Poliammide	Support head: Polyamide	Halter: Polyamid
Viti e rondelle e dado:	Screws, washers and nut:	Schrauben, Scheibe und Mutter
Acciaio inox	Stainless steel	Edelstahl


Testata d'appoggio / Support head / Stützkopf

Part	Article-Nr.	ØA
410	41001	48,3
410	41002	60,3

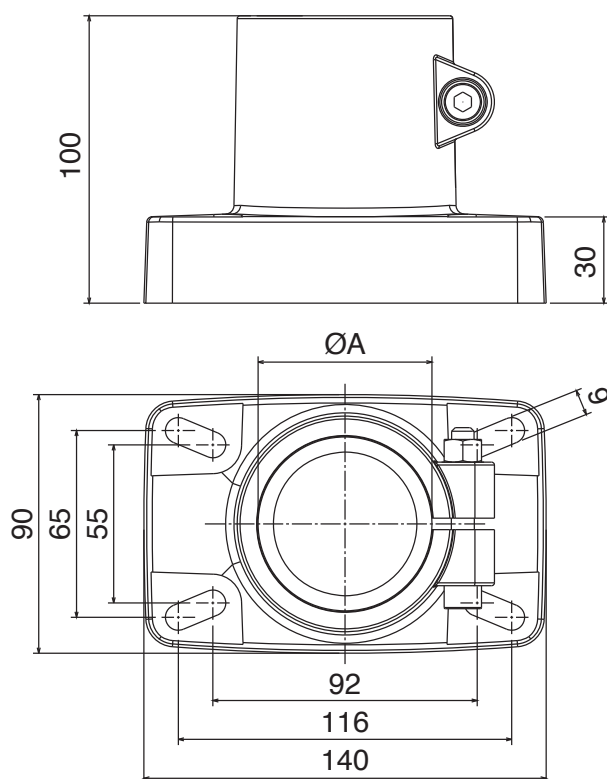

Testata d'appoggio / Support head / Stützkopf


Part	Article-Nr.	ØA
411	41101	48,3
411	41102	50,9

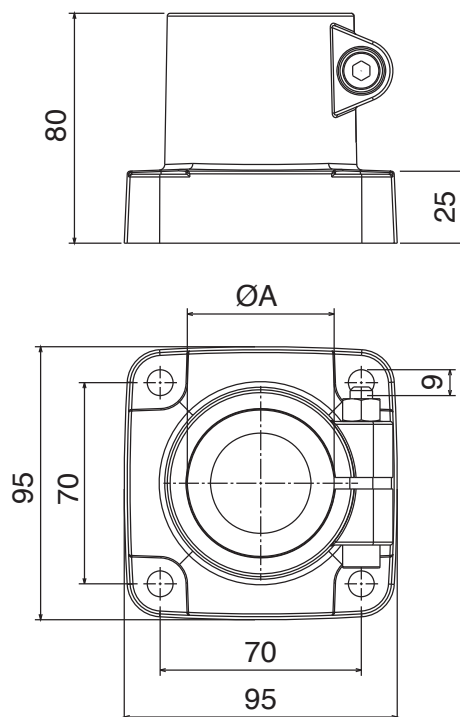



Testata d'appoggio / Support head / Stützkopf

Part	Article-Nr.
426	42601

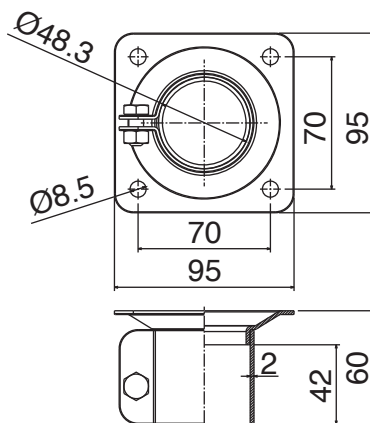


Stainless steel
AISI 304



Supporto laterale / Side bracket / Seitenhalter

Part	Article-Nr.	A
427	42701	16
427	42702	20

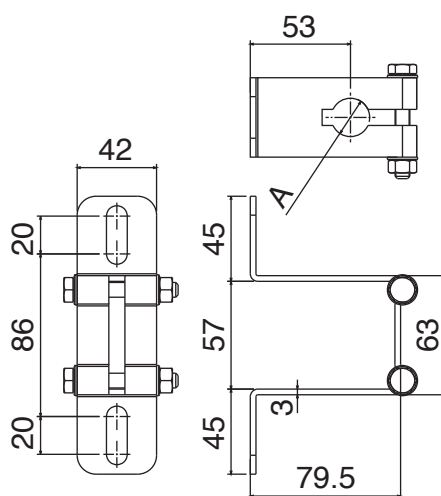


Stainless steel
AISI 304



Morsetto a collare / Clamp collar / Klemmschelle

Part	Article-Nr.
425	42501

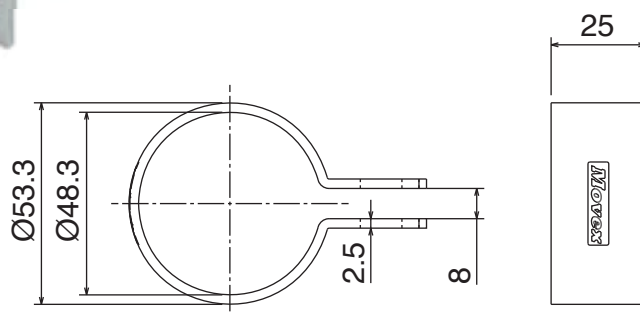


Stainless steel
AISI 304

Materiale:	Material:	Materialien:
Giunto: Poliammide	Joint: Polyamide	Verbinder: Polyamid
Viti e rondelle:	Screws and washers:	Schrauben und Scheibe:
Acciaio inox	Stainless steel	Edelstahl
Dadi: ottone nichelato	Nuts: nickel plated brass	Mutter: Messing vernickelt


Giunto di collegamento / Connecting joint / Verbindungselement

Part	Article-Nr.	ØA	ØB	C	D	E
413	41301	48,3	48,3	134	86	68
413	41302	60,3	48,3	146	98	80
413	41303	60,3	60,3	146	98	80

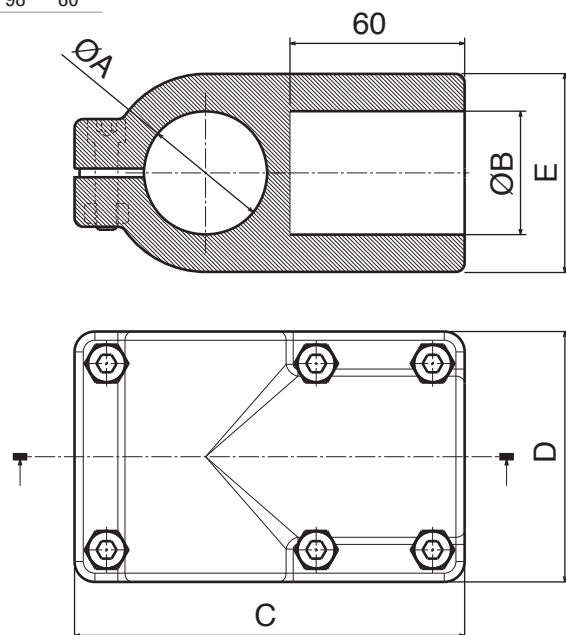

Giunto di collegamento / Connecting joint / Verbindungselement



Part	Article-Nr.	ØA
417	41701	48,3
417	41702	50,9

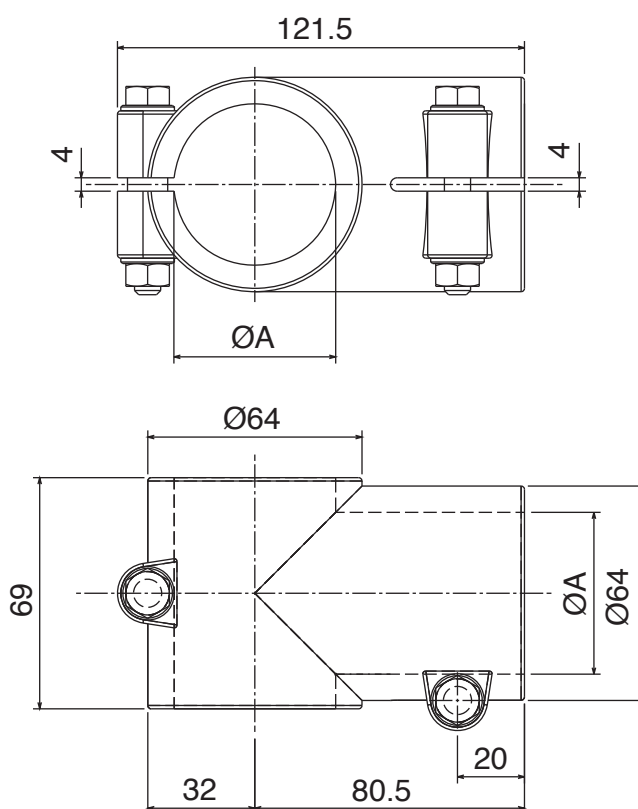

Materiale:
Acciaio inoxMaterial:
Stainless steelMaterialien:
Edelstahl

Giunto di collegamento (acciaio inox) / Connecting joint (SS) / Verbindungselement (Edelstahl)


Part	Article-Nr.	ØA	ØB	C	D	E
414	41401	48,3	48,3	100	130	72.5
414	41402	60,3	60,3	110	130	92.5

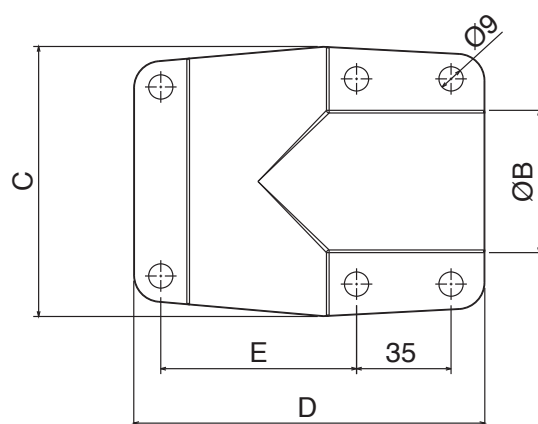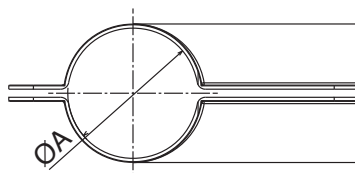Stainless steel
AISI 304

Materiale:	Material:	Materialien:
Tappo: Pollammide	Plug: Polyamide	Stopfen: Polyamid
Inserti: PA o ottone nichelato	Inserts: PA or nickel plated brass	Einsatz: PA oder Messing vernickelt


Tappi ad espansione / Expansions plugs / Gewindezapfen, Spreizbar



Part	Article-Nr.	ØA	B	C	M
Brass Bush	PA Bush				
419	41901	20	20	4	M8
419	41902	20	20	4	M10
419	41903	38	40	5	M8
419	41904	38	40	5	M10
419	41905	42,4	40	5	M8
419	41906	42,4	40	5	M10

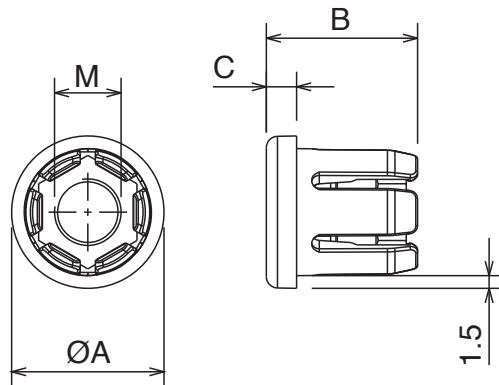

Tappi ad espansione / Expansions plugs / Gewindezapfen, Spreizbar

Part	Article-Nr.	A	B	C	D	M
Brass Bush	PA Bush					
420	42001	20	20	4	1,5	M8
420	42002	20	20	4	1,5	M10
420	42003	20	20	4	2	M8
420	42004	20	20	4	2	M10
420	42005	40	40	5	2	M8
420	42006	40	40	5	2	M10

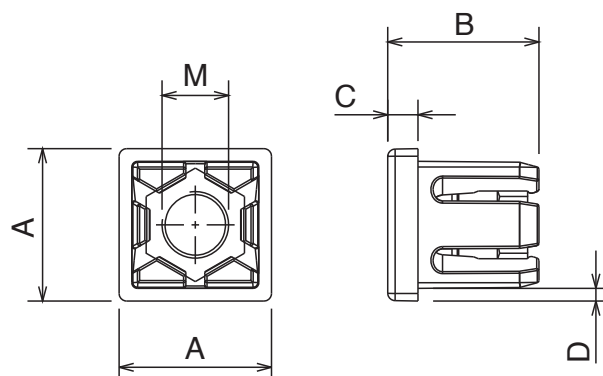

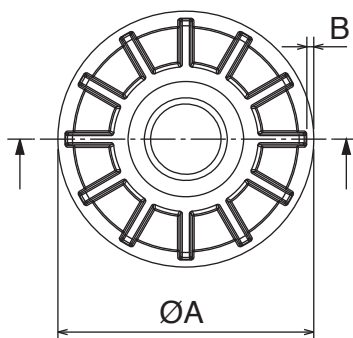

Tappi tondi filettati / Threaded bushings for round tubes / Gewindezapfen f. Rund-Rohr

Materiale:	Material:	Materialien:
Tappo: Poliammide	Plug: Polyamide	Stopfen: Polyamid
Inserti: ottone nichelato	Inserts: nickel plated brass	Einsatz: Messing vernickelt



Part	Article-Nr.	ØA	B	C	D	Part	Article-Nr.	ØA	B	C	D
415	41507			M10	33	415	41553			M10	48
415	41508			M12	33	415	41554			M12	48
415	41509		1	M14	33	415	41555		2	M14	48
415	41510			M16	33	415	41556			M16	48
415	41511			M10	33	415	41557			M20	48
415	41512			M12	33	415	41558	48,3		M10	48
415	41513		1,5	M14	33	415	41559			M12	48
415	41514			M16	33	415	41560		2,5	M14	48
415	41515	30		M10	33	415	41561			M16	48
415	41516			M12	33	415	41562			M20	48
415	41517		2	M14	33	415	41563			M10	50
415	41518			M16	33	415	41564			M12	50
415	41519			M10	33	415	41565	50	1,5	M14	50
415	41520			M12	33	415	41503			M16	50
415	41521		2,5	M14	33	415	41504			M20	50
415	41522			M16	33	415	41566			M10	50
415	41523			M10	40	415	41567			M12	50
415	41524			M12	40	415	41568		1,5	M14	50
415	41525		1,5	M14	40	415	41569			M16	50
415	41526			M16	40	415	41570			M20	50
415	41527			M10	40	415	41571			M10	50
415	41528			M12	40	415	41572			M12	50
415	41529		2	M14	40	415	41573	50,9	2	M14	50
415	41530			M16	40	415	41574			M16	50
415	41531			M10	40	415	41575			M20	50
415	41532			M12	40	415	41576			M10	50
415	41533		2,5	M14	40	415	41577			M12	50
415	41534			M16	40	415	41578		2,5	M14	50
415	41535			M10	43	415	41579			M16	50
415	41536			M12	43	415	41580			M20	50
415	41537		1,5	M14	43	415	41581			M10	55
415	41538			M16	43	415	41582			M12	55
415	41539			M20	43	415	41583		1,5	M14	55
415	41540			M10	43	415	41584			M16	55
415	41541			M12	43	415	41585			M20	55
415	41542	42,4	2	M14	43	415	41586			M10	55
415	41543			M16	43	415	41587			M12	55
415	41544			M20	43	415	41588	60,3	2	M14	55
415	41545			M10	43	415	41505			M16	55
415	41546			M12	43	415	41506			M20	55
415	41547		2,5	M14	43	415	41589			M10	55
415	41548			M16	43	415	41590			M12	55
415	41549			M20	43	415	41591		2,5	M14	55
415	41550			M10	48	415	41592			M16	55
415	41551			M12	48	415	41593			M20	55
415	41552	48,3	1,5	M14	48						
415	41501			M16	48						
415	41502			M20	48						

Materiale:	Material:	Materialien:
Tappo: Poliammide	Plug: Polyamide	Stopfen: Polyamid
Inserti: ottone nichelato	Inserts: nickel plated brass	Einsatz: Messing vernickelt

Tappi quadri filettati / Threaded bushings for square tubes / Gewindezapfen f. Vierkant-Rohr


Part	Article-Nr.	A	B	C	D
416	41601	25	1,5	M10	30
416	41602			M12	30
416	41611			M10	33
416	41603		1,5	M12	33
416	41612			M14	33
416	41604			M16	33
416	41613	30		M10	33
416	41614		2	M12	33
416	41615			M14	33
416	41616			M16	33
416	41617			M10	40
416	41618			M12	40
416	41619		1,5	M14	40
416	41620			M16	40
416	41621			M20	40
416	41622	35		M10	40
416	41623			M12	40
416	41624		2	M14	40
416	41625			M16	40
416	41626			M20	40
416	41681			M10	43
416	41682			M12	43
416	41683		1,6	M14	43
416	41684			M16	43
416	41685			M20	43
416	41686	38,1		M10	43
416	41687			M12	43
416	41688		3	M14	43
416	41689			M16	43
416	41690			M20	43
416	41627			M10	43
416	41628			M12	43
416	41629		1,2	M14	43
416	41630			M16	43
416	41631			M20	43
416	41632			M10	43
416	41605			M12	43
416	41633		1,5	M14	43
416	41606			M16	43
416	41634			M20	43
416	41635	40		M10	43
416	41636			M12	43
416	41637		2	M14	43
416	41607			M16	43
416	41608			M20	43
416	41638			M10	43
416	41639			M12	43
416	41640		2,5	M14	43
416	41641			M16	43
416	41642			M20	43

Part	Article-Nr.	A	B	C	D
416	41643			M10	45
416	41644			M12	45
416	41645	45	2	M14	45
416	41646			M16	45
416	41647			M20	45
416	41648			M10	50
416	41649			M12	50
416	41650		1,2	M14	50
416	41651			M16	50
416	41652			M20	50
416	41653			M10	50
416	41654			M12	50
416	41655		1,5	M14	50
416	41656			M16	50
416	41657			M20	50
416	41658			M10	50
416	41659			M12	50
416	41660	50	2	M14	50
416	41609			M16	50
416	41610			M20	50
416	41661			M10	50
416	41662			M12	50
416	41663		2,5	M14	50
416	41664			M16	50
416	41665			M20	50
416	41666			M10	50
416	41667			M12	50
416	41668		3	M14	50
416	41669			M16	50
416	41670			M20	50
416	41671			M10	55
416	41672			M12	55
416	41673		2	M14	55
416	41674			M16	55
416	41675			M20	55
416	41676	60		M10	55
416	41677			M12	55
416	41678		3	M14	55
416	41679			M16	55
416	41680			M20	55

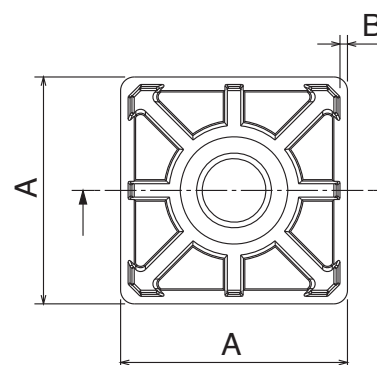



Tappi quadri filettati / Threaded bushings for square tube / Gewindezapfen f. Vierkant-Rohr

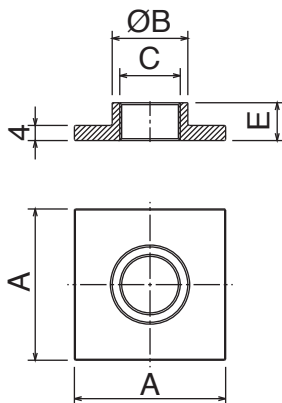


Part	Article-Nr.	A	C	ØB	E
428	42801	40	M16	20	10
428	42802	40	M20	23	11,5
428	42803	45	M16	20	10
428	42804	45	M20	23	11,5
428	42805	50	M16	20	10
428	42806	50	M20	23	11,5
428	42807	60	M16	20	10
428	42808	60	M20	23	11,5

Stainless steel
AISI 304



Tappi tondi filettati / Threaded bushings for round tube / Gewindezapfen f. Rund-Rohr

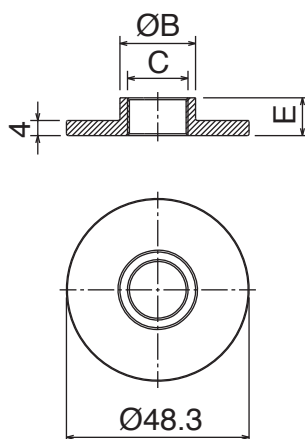


Part	Article-Nr.	C	ØB	E
429	42901	M16	20	10
429	42902	M20	23	11,5

Stainless steel
AISI 304



Tappi rettangolari filettati / Threaded bushings for rectangular tube / Gewindezapfen f. Rechteck

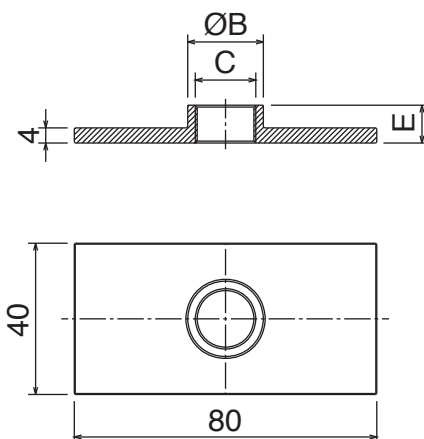

Part	Article-Nr.	C	ØB	E
430	43001	M16	20	10
430	43002	M20	23	11,5


Stainless steel
AISI 304

Materiale:	Material:	Materialien:
Poliammide	Polyamide	Polyamid

Giunto di collegamento / Connecting joint / Verbindungselement

Part	Article-Nr.	Type
418	41801	A
418	41802	B
418	41803	C
418	41804	D
418	41805	E
418	41806	F
418	41807	G
418	41808	H

For tubes
25x25x1,5 mm



Type A



Type B



Type C



Type D



Type E



Type F



Type G



Type H




Materiale:
Poliammide

Material:
Polyamide

Materialien:
Polyamid




Blocco per pannelli / Panel clamp / Panelklemme

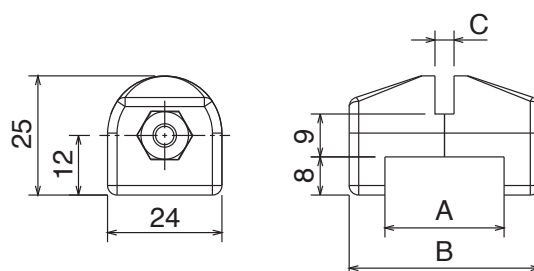

Part	Article-Nr.	A	B	C
421	42101	25	40	4
421	42102	25	40	5
421	42103	25	40	6
421	42104	30	45	4
421	42105	30	45	5
421	42106	30	45	6




Fermaporta / Door stop / Türstopper

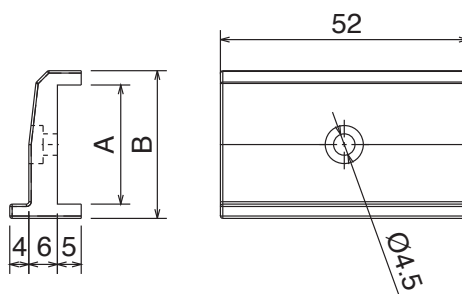

Part	Article-Nr.	A	B
422	42201	25	31
422	42202	30	36




Blocchetto di fissaggio / Fixing lock / Anschlag

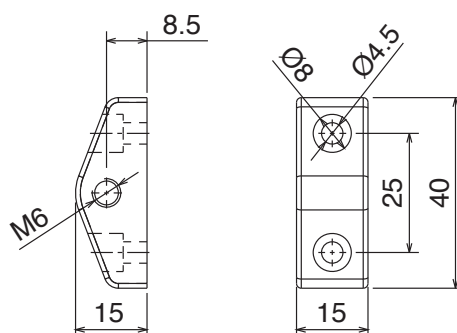

Part	Article-Nr.
423	42301



Fermaporta a molla / Spring loaded latch / Türverschluss

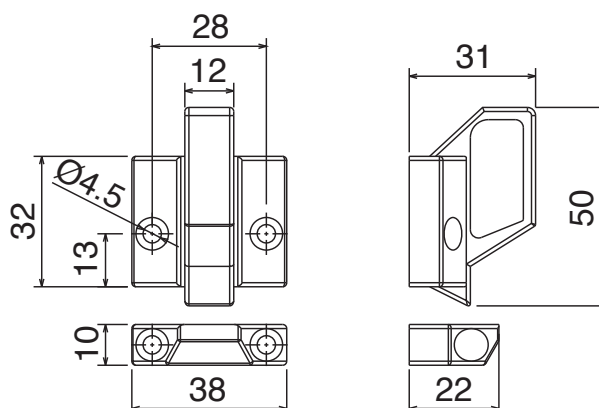

Part	Article-Nr.
424	42401

UCFL Series



pag. 186



pag. 189

UCF Series



pag. 192



pag. 195

UCF-H / UCFL-H Series



pag. 198



pag. 198

FL-L Series



pag. 200

SUCFL-SUCF-SUCFK Series



pag. 202





COMPONENTI



- Sede in poliammide rinforzato, con elevata resistenza meccanica e ottima resistenza contro agenti chimici corrosivi quali acqua, oli, benzina e liquidi contenenti alcool. Tutti i nostri cuscinetti possono essere utilizzati ad una temperatura compresa fra 0°C e +80°C
- I cuscinetti sono realizzati in acciaio al cromo, disponibili anche, su richiesta, nella versione in acciaio inox. Il cuscinetto all'interno della flangia può essere regolato di 2,5°.
- L'ingrassatore viene realizzato in ferro nichelato, o in acciaio inox nella versione con il cuscinetto in acciaio inox.
- Distanziali realizzati in ottone nichelato per rinforzare il foro di fissaggio
- Rondella in acciaio inox.

COMPONENTS


- *Housing in reinforced polyamide, with higher load capacity and good resistance to corrosive chemicals such as water, oils, petrol and alcoholic beverages. All our bearings can be used at temperatures between 0°C and +80°C.*
- *Ball bearings are made in chrome steel. They are also available, upon request, in stainless steel. Max misalignment between shaft and housing: 2.5°.*
- *Grease nipple are made in nickel plated steel, but they can also be made in stainless steel on the stainless steel bearing.*
- *Spacers from nickel plated brass to reinforce fixing holes.*
- *Washer stainless steel.*

KOMPONENTEN

- *Gehäuse gefertigt aus verstärktem Polyamid. Dies gewährleistet eine gute Widerstandsfähigkeit gegenüber mechanischen Einflüssen und eine gute Korrosionsbeständigkeit gegenüber Wasser, Ölen, Benzin, Flüssigkeiten mit Alkohol und Chemikalien. Alle unsere Gehäuse-Lagereinheiten können in einem Temperaturbereich von 0°C bis +80°C eingesetzt werden.*
- *Die Lagereinsätze sind aus Chrom-Stahl, auf Anfrage auch in Edelstahl erhältlich. Alle Lager gleichen einen Fluchtungsfehler von bis zu 2,5° selbstständig aus.*
- *Die Schmiernippel sind aus vernickeltem Stahl (aus Edelstahl wenn die Ausführung mit Edelstahl Einsatz gefragt ist).*
- *Alle Distanzstücke sind aus vernickeltem Messing und verstärken die Befestigungsbohrungen*
- *Alle Unterlegscheiben aus Edelstahl.*

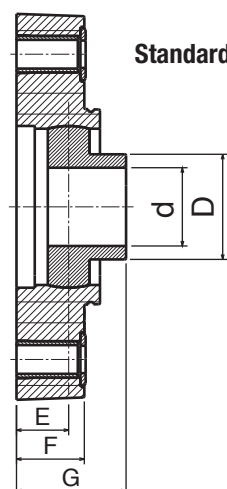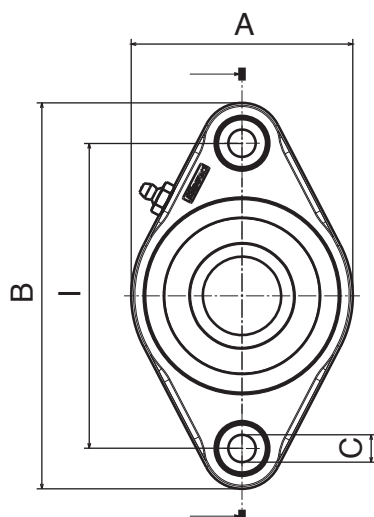

Standard

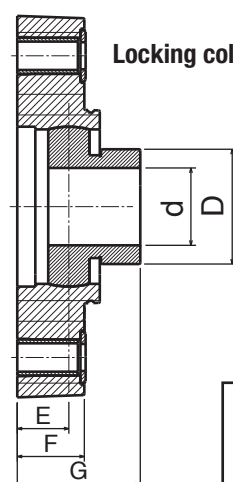

Locking collar



Safety Cap

Inserto standard / Standard insert / Standard-Flanschlager



Chrome steel	Part	Article-Nr.	Series	d	I	A	B	C	D	E	F	G	Article-Nr.
	801	80110	UCFL204	20	90	62	116	11	29	16	20	34	89004
	801	80100	UCFL204	20	90	71	130	11	29	17,5	22,5	33,5	89001
	801	80121	UCFL205/90	25	90	85	116	11	34	14,5	20	34	89005
	801	80101	UCFL205/90	25	90	71	130	11	34	16,8	22,5	36,3	89001
	801	80111	UCFL205	25	99	71	130	11	34	16,8	22,5	36,3	89001
	801	80122	UCFL206/90	30	90	85	116	11	40,3	14,5	20	36,5	89005
	801	80132	UCFL206/99	30	99	85	130	11	40,3	20	26	42	89002
	801	80102	UCFL206/99	30	99	85	148	11	40,3	20	26	42	89002
	801	80112	UCFL206	30	117	85	148	11	40,3	20	26	42	89002
	801	80103	UCFL207/117	35	117	93	148	11	48	19,5	26	43	89003
	801	80113	UCFL207	35	130	93	162	11	48	19,5	26	43	89003
	801	80104	UCFL208/117	40	117	93	148	11	53	19	26	44	89003
801	80114	UCFL208	40	130	93	162	11	53	19	26	44	89003	

Inserto standard / Standard insert / Standard-Flanschlager


Stainless steel	Part	Article-Nr.	Series	d	I	A	B	C	D	E	F	G	Article-Nr.
	801	80110SS	UCFL204	20	90	62	116	11	29	16	20	34	89004
	801	80100SS	UCFL204	20	90	71	130	11	29	17,5	22,5	33,5	89001
	801	80121SS	UCFL205/90	25	90	85	116	11	34	14,5	20	34	89005
	801	80101SS	UCFL205/90	25	90	71	130	11	34	16,8	22,5	36,3	89001
	801	80111SS	UCFL205	25	99	71	130	11	34	16,8	22,5	36,3	89001
	801	80122SS	UCFL206/90	30	90	85	116	11	40,3	14,5	20	36,5	89005
	801	80132SS	UCFL206/99	30	99	85	130	11	40,3	20	26	42	89002
	801	80102SS	UCFL206/99	30	99	85	148	11	40,3	20	26	42	89002
	801	80112SS	UCFL206	30	117	85	148	11	40,3	20	26	42	89002
	801	80103SS	UCFL207/117	35	117	93	148	11	48	19,5	26	43	89003
	801	80113SS	UCFL207	35	130	93	162	11	48	19,5	26	43	89003
	801	80104SS	UCFL208/117	40	117	93	148	11	53	19	26	44	89003
801	80114SS	UCFL208	40	130	93	162	11	53	19	26	44	89003	

Inserto con ghiera eccentrica / Insert with locking collar / Flanschlager mit Exzenter-Klemmring

Chrome steel	Part	Article-Nr.	Series	d	I	A	B	C	D	E	F	G	Article-Nr.
	802	80210	UCFL204	20	90	62	116	11	33,3	16	20	39,9	89004
	802	80200	UCFL204	20	90	71	130	11	33,3	17,5	22,5	41,4	89001
	802	80221	UCFL205/90	25	90	85	116	11	38,1	14,5	20	37,9	89005
	802	80201	UCFL205/90	25	90	71	130	11	38,1	16,8	22,5	40,2	89001
	802	80211	UCFL205	25	99	71	130	11	38,1	16,8	22,5	40,2	89001
	802	80222	UCFL206/90	30	90	85	116	11	44,5	14,5	20	42,2	89005
	802	80232	UCFL206/99	30	99	85	130	11	44,5	20	26	47,7	89002
	802	80202	UCFL206/99	30	99	85	148	11	44,5	20	26	47,7	89002
	802	80212	UCFL206	30	117	85	148	11	44,5	20	26	47,7	89002
	802	80203	UCFL207/117	35	117	93	148	11	55,6	19,5	26	49,9	89003
	802	80213	UCFL207	35	130	93	162	11	55,6	19,5	26	49,9	89003
	802	80204	UCFL208/117	40	117	93	148	11	60,3	19	26	53,7	89003
802	80214	UCFL208	40	130	93	162	11	60,3	19	26	53,7	89003	

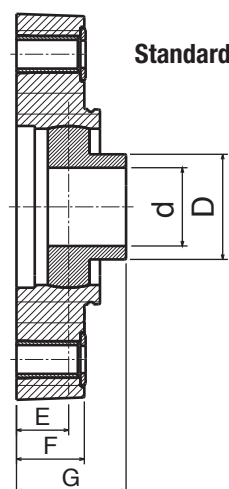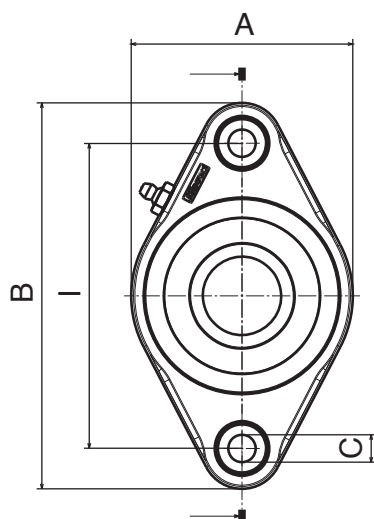

Standard

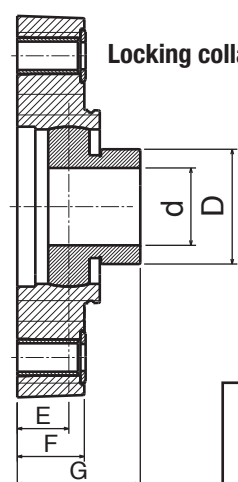

Locking collar



NEW

Inserto standard / Standard insert / Standard-Flanschlager

Part	Article-Nr.	Series	d	I	A	B	C	D	E	F	G	Article-Nr.
822	82210	UCFL204	20	90	62	116	11	29	16	20	34	89004
822	82211	UCFL205	25	99	71	130	11	34	16,8	22,5	36,3	89001
822	82212	UCFL206	30	117	85	148	11	40,3	20	26	42	89002
822	82213	UCFL207	35	130	93	162	11	48	19,5	26	43	89003
822	82204	UCFL208/117	40	117	93	148	11	53	19	26	44	89003

NEW

Inserto standard / Standard insert / Standard-Flanschlager

Part	Article-Nr.	Series	d	I	A	B	C	D	E	F	G	Article-Nr.
822	82210SS	UCFL204	20	90	62	116	11	29	16	20	34	89004
822	82211SS	UCFL205	25	99	71	130	11	34	16,8	22,5	36,3	89001
822	82212SS	UCFL206	30	117	85	148	11	40,3	20	26	42	89002
822	82213SS	UCFL207	35	130	93	162	11	48	19,5	26	43	89003
822	82204SS	UCFL208/117	40	117	93	148	11	53	19	26	44	89003

NEW

Inserto con ghiera eccentrica / Insert with locking collar / Flanschlager mit Exzenter-Klemmring

Part	Article-Nr.	Series	d	I	A	B	C	D	E	F	G	Article-Nr.
823	82310	UCFL204	20	90	62	116	11	33,3	16	20	39,9	89004
823	82311	UCFL205	25	99	71	130	11	38,1	16,8	22,5	40,2	89001
823	82312	UCFL206	30	117	85	148	11	44,5	20	26	47,7	89002
823	82313	UCFL207	35	130	93	162	11	55,6	19,5	26	49,9	89003
822	82304	UCFL208/117	40	117	93	148	11	60,3	19	26	53,7	89003



COMPONENTI


- Sede in poliammide rinforzato, con elevata resistenza meccanica e ottima resistenza contro agenti chimici corrosivi quali acqua, oli, benzina e liquidi contenenti alcool. Tutti i nostri cuscinetti possono essere utilizzati ad una temperatura compresa fra 0°C e +80°C.
- I cuscinetti sono realizzati in acciaio al cromo, disponibili anche, su richiesta, nella versione in acciaio inox. Il cuscinetto all'interno della flangia può essere regolato di 2,5°.
- L'ingrassatore viene realizzato in ferro nichelato, o in acciaio inox nella versione con il cuscinetto in acciaio inox.
- Distanziali realizzati in ottone nichelato per rinforzare il foro di fissaggio.
- Rondella in acciaio inox.
- Coperchio di sicurezza in Polietilene.
- Anello di tenuta in gomma NBR.
- O-ring in NBR rubber.

COMPONENTS

- *Housing in reinforced polyamide, with higher load capacity and good resistance to corrosive chemicals such as water, oils, petrol and alcoholic beverages. All our bearings can be used at temperatures between 0°C and +80°C.*
- *Ball bearings are made in chrome steel. They are also available, upon request, in stainless steel. Max misalignment between shaft and housing: 2.5°.*
- *Grease nipple are made in nickel plated steel, but they can also be made in stainless steel on the stainless steel bearing.*
- *Spacers from nickel plated brass to reinforce fixing holes.*
- *Washer stainless steel.*
- *Clip-on safety cap in Polyethylene.*
- *Rotary shaft seal ring in NBR rubber.*
- *O-ring in NBR rubber.*

KOMPONENTEN

- *Gehäuse gefertigt aus verstärktem Polyamid. Dies gewährleistet eine gute Widerstandsfähigkeit gegenüber mechanischen Einflüssen und eine gute Korrosionsbeständigkeit gegenüber Wasser, Ölen, Benzin, Flüssigkeiten mit Alkohol und Chemikalien. Alle unsere Gehäuse-Lagereinheiten können in einem Temperaturbereich von 0°C bis +80°C eingesetzt werden.*
- *Die Lagereinsätze sind aus Chrom-Stahl, auf Anfrage auch in Edelstahl erhältlich. Alle Lager gleichen eine Fluchtungsfehler von bis zu 2,5° selbstständig aus.*
- *Die Schmiernippel sind aus vernickeltem Stahl (aus Edelstahl wenn die Ausführung mit Edelstahl Einsatz gefragt ist).*
- *Alle Distanzstücke sind aus vernickeltem Messing und verstärken die Befestigungsbohrungen.*
- *Alle Unterlegscheiben aus Edelstahl.*
- *Schutzkappe aus Polyäthylen.*
- *Dichtringe aus NBR-Gummi.*
- *O-Ringe aus NBR-Gummi.*

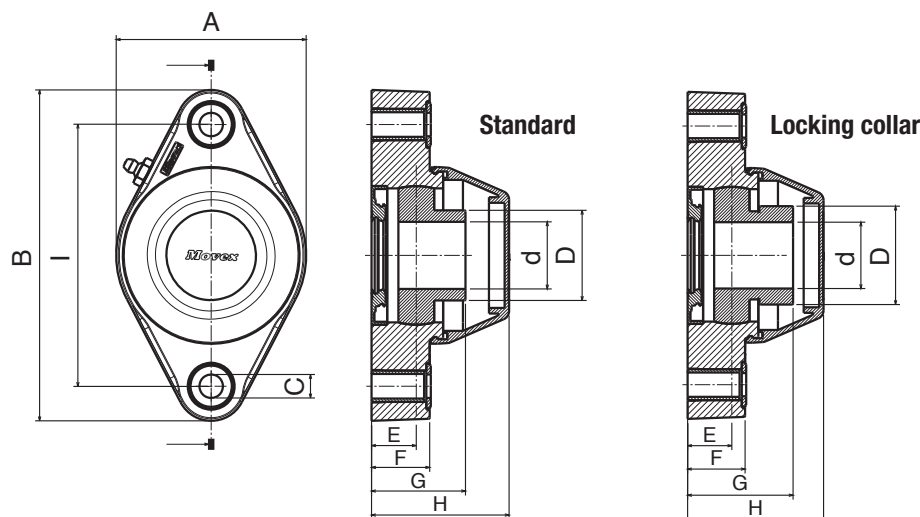

Inserto standard, con guarnizioni, versione aperta e chiusa / Standard insert, sealed, open and close version / Standard-Flanschlager, abgedichtet, offene und geschlossene Version

	Part	Art-close	Part	Art-open	Series	d	l	A	B	C	D	E	F	G	H
Chrome steel	803	80310	804	80410	UCFL204	20	90	62	116	11	29	16	20	34	51,5
	803	80300	804	80400	UCFL204	20	90	71	130	11	29	17,5	22,5	35,5	52
	803	80321	804	80421	UCFL205/90	25	90	85	116	11	34	14,5	20	34	55,5
	803	80301	804	80401	UCFL205/90	25	90	71	130	11	34	16,8	22,5	36,3	52
	803	80311	804	80411	UCFL205	25	99	71	130	11	34	16,8	22,5	36,3	52
	803	80322	804	80422	UCFL206/90	30	90	85	116	11	40,3	14,5	20	36,5	55,5
	803	80332	804	80432	UCFL206/99	30	99	85	130	11	40,3	20	26	42	61,5
	803	80302	804	80402	UCFL206/99	30	99	85	148	11	40,3	20	26	42	61,5
	803	80312	804	80412	UCFL206	30	117	85	148	11	40,3	20	26	42	61,5
	803	80303	804	80403	UCFL207/117	35	117	93	148	11	48	19,5	26	43	66,5
	803	80313	804	80413	UCFL207	35	130	93	162	11	48	19,5	26	43	66,5
	803	80304	804	80404	UCFL208/117	40	117	93	148	11	53	19	26	44	66,5
	803	80314	804	80414	UCFL208	40	130	93	162	11	53	19	26	44	66,5

Inserto standard, con guarnizioni, versione aperta e chiusa / Standard insert, sealed, open and close version / Standard-Flanschlager, abgedichtet, offene und geschlossene Version



NEW Stainless steel	Part	Art-close	Part	Art-open	Series	d	l	A	B	C	D	E	F	G	H
	803	80310SS	804	80410SS	UCFL204	20	90	62	116	11	29	16	20	34	51,5
	803	80300SS	804	80400SS	UCFL204	20	90	71	130	11	29	17,5	22,5	35,5	52
	803	80321SS	804	80421SS	UCFL205/90	25	90	85	116	11	34	14,5	20	34	55,5
	803	80301SS	804	80401SS	UCFL205/90	25	90	71	130	11	34	16,8	22,5	36,3	52
	803	80311SS	804	80411SS	UCFL205	25	99	71	130	11	34	16,8	22,5	36,3	52
	803	80322SS	804	80422SS	UCFL206/90	30	90	85	116	11	40,3	14,5	20	36,5	55,5
	803	80332SS	804	80432SS	UCFL206/99	30	99	85	130	11	40,3	20	26	42	61,5
	803	80302SS	804	80402SS	UCFL206/99	30	99	85	148	11	40,3	20	26	42	61,5
	803	80312SS	804	80412SS	UCFL206	30	117	85	148	11	40,3	20	26	42	61,5
	803	80303SS	804	80403SS	UCFL207/117	35	117	93	148	11	48	19,5	26	43	66,5
	803	80313SS	804	80413SS	UCFL207	35	130	93	162	11	48	19,5	26	43	66,5
	803	80304SS	804	80404SS	UCFL208/117	40	117	93	148	11	53	19	26	44	66,5
	803	80314SS	804	80414SS	UCFL208	40	130	93	162	11	53	19	26	44	66,5

Inserto "long life", con guarnizioni, versione aperta e chiusa / "Long life" insert, sealed, open and close version / "Long Life"-Flanschlager, abgedichtet, offene und geschlossene Version


NEW Chrome steel - "Long life"	Part	Art-close	Part	Art-open	Series	d	l	A	B	C	D	E	F	G	H
	803	80310L	804	80410L	UCFL204	20	90	62	116	11	29	16	20	34	51,5
	803	80300L	804	80400L	UCFL204	20	90	71	130	11	29	17,5	22,5	35,5	52
	803	80321L	804	80421L	UCFL205/90	25	90	85	116	11	34	14,5	20	34	55,5
	803	80301L	804	80401L	UCFL205/90	25	90	71	130	11	34	16,8	22,5	36,3	52
	803	80311L	804	80411L	UCFL205	25	99	71	130	11	34	16,8	22,5	36,3	52
	803	80322L	804	80422L	UCFL206/90	30	90	85	116	11	40,3	14,5	20	36,5	55,5
	803	80332L	804	80432L	UCFL206/99	30	99	85	130	11	40,3	20	26	42	61,5
	803	80302L	804	80402L	UCFL206/99	30	99	85	148	11	40,3	20	26	42	61,5
	803	80312L	804	80412L	UCFL206	30	117	85	148	11	40,3	20	26	42	61,5
	803	80303L	804	80403L	UCFL207/117	35	117	93	148	11	48	19,5	26	43	66,5
	803	80313L	804	80413L	UCFL207	35	130	93	162	11	48	19,5	26	43	66,5
	803	80304L	804	80404L	UCFL208/117	40	117	93	148	11	53	19	26	44	66,5
	803	80314L	804	80414L	UCFL208	40	130	93	162	11	53	19	26	44	66,5

Inserto con ghiera eccentrica, guarnizioni, versione aperta e chiusa / Insert with locking collar, sealed, open and close version / Flanschlager mit Exzenter-Klemmring, abgedichtet, offene und geschlossene Version

	Part	Art-close	Part	Art-open	Series	d	l	A	B	C	D	E	F	G	H
Chrome steel	805	80510	806	80610	UCFL204	20	90	62	116	11	33,3	16	20	39,9	51,5
	805	80500	806	80600	UCFL204	20	90	71	130	11	33,3	17,5	22,5	41,4	52
	805	80521	806	80621	UCFL205/90	25	90	85	116	11	38,1	14,5	20	37,9	55,5
	805	80501	806	80601	UCFL205/90	25	90	71	130	11	38,1	16,8	22,5	40,2	52
	805	80511	806	80611	UCFL205	25	99	71	130	11	38,1	16,8	22,5	40,2	52
	805	80522	806	80622	UCFL206/90	30	90	85	116	11	44,5	14,5	20	42,2	55,5
	805	80532	806	80632	UCFL206/99	30	99	85	130	11	44,5	20	26	47,7	61,5
	805	80502	806	80602	UCFL206/99	30	99	85	148	11	44,5	20	26	47,7	61,5
	805	80512	806	80612	UCFL206	30	117	85	148	11	44,5	20	26	47,7	61,5
	805	80503	806	80603	UCFL207/117	35	117	93	148	11	55,6	19,5	26	49,9	66,5
	805	80513	806	80613	UCFL207	35	130	93	162	11	55,6	19,5	26	49,9	66,5
	805	80504	806	80604	UCFL208/117	40	117	93	148	11	60,3	19	26	53,7	66,5
	805	80514	806	80614	UCFL208	40	130	93	162	11	60,3	19	26	53,7	66,5

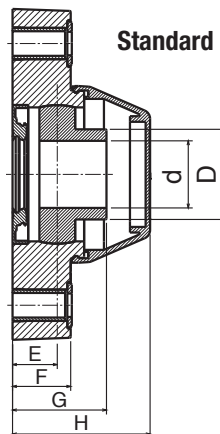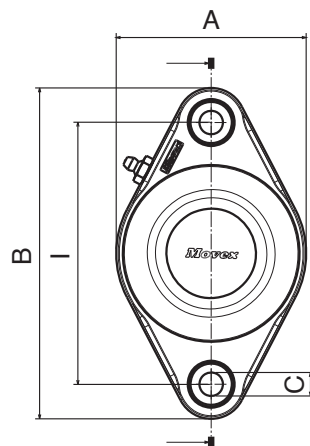

Standard

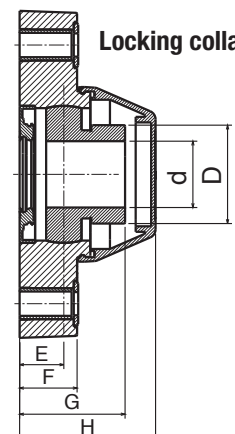

Locking collar

Solid
Housing

NEW

Inserto standard, con guarnizioni, versione aperta e chiusa / Standard insert, sealed, open and close version / Standard-Flanschlag, abgedichtet, offene und geschlossene Version

Part	Art-close	Part	Art-open	Series	d	l	A	B	C	D	E	F	G	H
824	82410	825	82510	UCFL204	20	90	62	116	11	29	16	20	34	51,5
824	82411	825	82511	UCFL205	25	99	71	130	11	34	16,8	22,5	36,3	52
824	82412	825	82512	UCFL206	30	117	85	148	11	40,3	20	26	42	61,5
824	82412	825	82513	UCFL207	35	130	93	162	11	48	19,5	26	43	66,5
824	82404	825	82504	UCFL208/117	40	117	93	148	11	53	19	26	44	66,5

NEW

Inserto standard, con guarnizioni, versione aperta e chiusa / Standard insert, sealed, open and close version / Standard-Flanschlag, abgedichtet, offene und geschlossene Version

Part	Art-close	Part	Art-open	Series	d	l	A	B	C	D	E	F	G	H
824	82410SS	825	82510SS	UCFL204	20	90	62	116	11	29	16	20	34	51,5
824	82411SS	825	82511SS	UCFL205	25	99	71	130	11	34	16,8	22,5	36,3	52
824	82412SS	825	82512SS	UCFL206	30	117	85	148	11	40,3	20	26	42	61,5
824	82413SS	825	82513SS	UCFL207	35	130	93	162	11	48	19,5	26	43	66,5
824	82404SS	825	82504SS	UCFL208/117	40	117	93	148	11	53	19	26	44	66,5

NEW

Inserto "long life", con guarnizioni, versione aperta e chiusa / "Long life" insert, sealed, open and close version / "Long Life"-Flanschlag, abgedichtet, offene und geschlossene Version

Part	Art-close	Part	Art-open	Series	d	l	A	B	C	D	E	F	G	H
824	82410L	825	82510L	UCFL204	20	90	62	116	11	29	16	20	34	51,5
824	82411L	825	82511L	UCFL205	25	99	71	130	11	34	16,8	22,5	36,3	52
824	82412L	825	82512L	UCFL206	30	117	85	148	11	40,3	20	26	42	61,5
824	82413L	825	82513L	UCFL207	35	130	93	162	11	48	19,5	26	43	66,5
824	82404L	825	82504L	UCFL208/117	40	117	93	148	11	53	19	26	44	66,5

NEW

Inserto con ghiera eccentrica, guarnizioni, versione aperta e chiusa / Insert with locking collar, sealed, open and close version / Flanschlag mit Exzenter-Klemmring, abgedichtet, offene und geschlossene Version

Part	Art-close	Part	Art-open	Series	d	l	A	B	C	D	E	F	G	H
826	82610	827	82710	UCFL204	20	90	62	116	11	33,3	16	20	39,9	51,5
826	82611	827	82711	UCFL205	25	99	71	130	11	38,1	16,8	22,5	40,2	52
826	82612	827	82712	UCFL206	30	117	85	148	11	44,5	20	26	47,7	61,5
826	82613	827	82713	UCFL207	35	130	93	162	11	55,6	19,5	26	49,9	66,5
826	82604	827	82704	UCFL208/117	40	117	93	148	11	60,3	19	26	53,7	66,5



COMPONENTI


- Sede in poliammide rinforzato, con elevata resistenza meccanica e ottima resistenza contro agenti chimici corrosivi quali acqua, oli, benzina e liquidi contenenti alcool. Tutti i nostri cuscinetti possono essere utilizzati ad una temperatura compresa fra 0°C e +80°C
- I cuscinetti sono realizzati in acciaio al cromo, disponibili anche, su richiesta, nella versione in acciaio inox. Il cuscinetto all'interno della flangia può essere regolato di 2,5°.
- L'ingrassatore viene realizzato in ferro nichelato, o in acciaio inox nella versione con il cuscinetto in acciaio inox.
- Distanziali realizzati in ottone nichelato per rinforzare il foro di fissaggio
- Rondella in acciaio inox.

COMPONENTS

- *Housing in reinforced polyamide, with higher load capacity and good resistance to corrosive chemicals such as water, oils, petrol and alcoholic beverages. All our bearings can be used at temperatures between 0°C and +80°C.*
- *Ball bearings are made in chrome steel. They are also available, upon request, in stainless steel. Max misalignment between shaft and housing: 2.5°.*
- *Grease nipple are made in nickel plated steel, but they can also be made in stainless steel on the stainless steel bearing.*
- *Spacers from nickel plated brass to reinforce fixing holes.*
- *Washer stainless steel.*

KOMPONENTEN

- *Gehäuse gefertigt aus verstärktem Polyamid. Dies gewährleistet eine gute Widerstandsfähigkeit gegenüber mechanischen Einflüssen und eine gute Korrosionsbeständigkeit gegenüber Wasser, Ölen, Benzin, Flüssigkeiten mit Alkohol und Chemikalien. Alle unsere Gehäuse-Lagereinheiten können in einem Temperaturbereich von 0°C bis +80°C eingesetzt werden.*
- *Die Lagereinsätze sind aus Chrom-Stahl, auf Anfrage auch in Edelstahl erhältlich. Alle Lager gleichen einen Fluchtungsfehler von bis zu 2,5° selbstständig aus.*
- *Die Schmiernippel sind aus vernickeltem Stahl (aus Edelstahl wenn die Ausführung mit Edelstahl Einsatz gefragt ist).*
- *Alle Distanzstücke sind aus vernickeltem Messing und verstärken die Befestigungsbohrungen*
- *Alle Unterlegscheiben aus Edelstahl.*

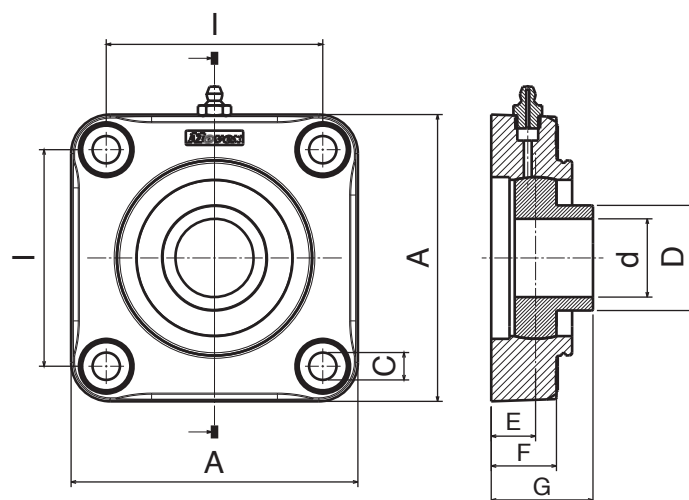


Safety Cap

Inserto standard / Standard insert / Standard-Flanschlager

Chrome steel	Part	Article-Nr.	Series	d	I	A	C	D	E	F	G	Article-Nr.
	807	80701	UCF205	25	70	98	11	34	16	22	35,5	89001
	807	80702	UCF206	30	83	110	11	40,3	17	25	39	89002
	807	80703	UCF207/83	35	83	110	11	48	20	25	43,5	89003
	807	80713	UCF207	35	92	118	11	48	20	25	43,5	89003
	807	80704	UCF208/83	40	83	110	11	53	19,5	25	44,5	89003
	807	80714	UCF208	40	102	130	11	53	19	25	44	89003

Inserto standard / Standard insert / Standard-Flanschlager


Stainless steel	Part	Article-Nr.	Series	d	I	A	C	D	E	F	G	Article-Nr.
	807	80701SS	UCF205	25	70	98	11	34	16	22	35,5	89001
	807	80702SS	UCF206	30	83	110	11	40,3	17	25	39	89002
	807	80703SS	UCF207/83	35	83	110	11	48	20	25	43,5	89003
	807	80713SS	UCF207	35	92	118	11	48	20	25	43,5	89003
	807	80704SS	UCF208/83	40	83	110	11	53	19,5	25	44,5	89003
	807	80714SS	UCF208	40	102	130	11	53	19	25	44	89003

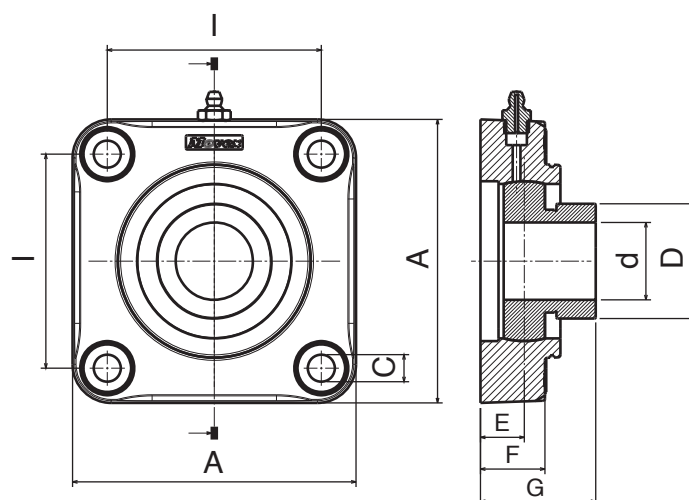

Safety Cap

Inserto con ghiera eccentrica / Insert with locking collar / Flanschlager mit Exzenter-Klemmring

Chrome steel	Part	Article-Nr.	Series0	d	I	A	C	D	E	F	G	Article-Nr.
	808	80801	UCF205	25	70	98	11	38,1	16	22	39,4	89001
	808	80802	UCF206	30	83	110	11	44,5	17	25	44,7	89002
	808	80803	UCF207/83	35	83	110	11	55,6	20	25	50,4	89003
	808	80813	UCF207	35	92	118	11	55,6	20	25	50,4	89003
	808	80804	UCF208/83	40	83	110	11	60,3	19,5	25	54,2	89003
	808	80814	UCF208	40	102	130	11	60,3	19	25	53,7	89003

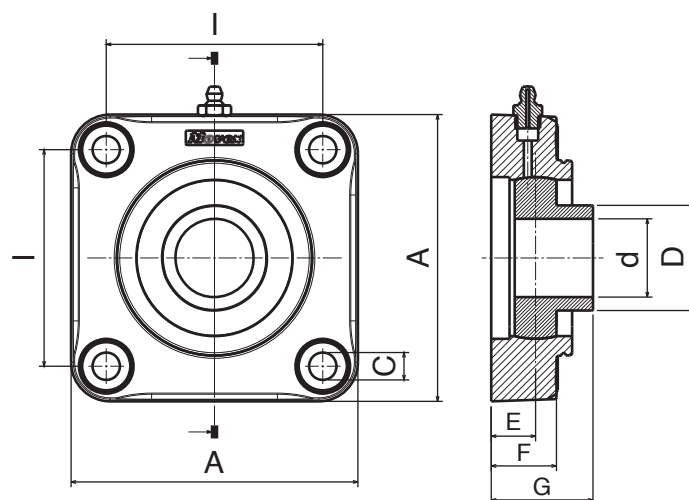

NEW


Inserto standard / Standard insert / Standard-Flanschlager

Chrome steel	Part	Article-Nr.	Series	d	I	A	C	D	E	F	G	Article-Nr.
	828	82801	UCF205	25	70	98	11	34	16	22	35,5	89001
	828	82802	UCF206	30	83	110	11	40,3	17	25	39	89002
	828	82813	UCF207	35	92	118	11	48	20	25	43,5	89003
	828	82804	UCF208/83	40	83	110	11	53	19,5	25	44,5	89003

NEW

Inserto standard / Standard insert / Standard-Flanschlager

Stainless steel	Part	Article-Nr.	Series	d	I	A	C	D	E	F	G	Article-Nr.
	828	82801SS	UCF205	25	70	98	11	34	16	22	35,5	89001
	828	82802SS	UCF206	30	83	110	11	40,3	17	25	39	89002
	828	82813SS	UCF207	35	92	118	11	48	20	25	43,5	89003
	828	82804SS	UCF208/83	40	83	110	11	53	19,5	25	44,5	89003

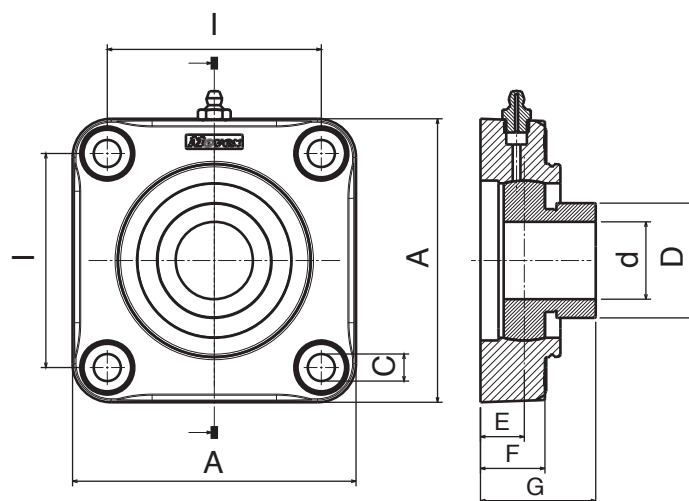

NEW

Inserto con ghiera eccentrica / Insert with locking collar / Flanschlager mit Exzenter-Klemmring

Chrome steel	Part	Article-Nr.	Series	d	I	A	C	D	E	F	G	Article-Nr.
	829	82901	UCF205	25	70	98	11	38,1	16	22	39,4	89001
	829	82902	UCF206	30	83	110	11	44,5	17	25	44,7	89002
	829	82913	UCF207	35	92	118	11	55,6	20	25	50,4	89003
	829	82904	UCF208/83	40	83	110	11	60,3	19,5	25	54,2	89003



COMPONENTI


- Sede in poliammide rinforzato, con elevata resistenza meccanica e ottima resistenza contro agenti chimici corrosivi quali acqua, oli, benzina e liquidi contenenti alcool. Tutti i nostri cuscinetti possono essere utilizzati ad una temperatura compresa fra 0°C e +80°C.
- I cuscinetti sono realizzati in acciaio al cromo, disponibili anche, su richiesta, nella versione in acciaio inox. Il cuscinetto all'interno della flangia può essere regolato di 2,5°.
- L'ingrassatore viene realizzato in ferro nichelato, o in acciaio inox nella versione con il cuscinetto in acciaio inox.
- Distanziali realizzati in ottone nichelato per rinforzare il foro di fissaggio.
- Rondella in acciaio inox.
- Coperchio di sicurezza in Polietilene.
- Anello di tenuta in gomma NBR.
- O-ring in NBR rubber.

COMPONENTS

- *Housing in reinforced polyamide, with higher load capacity and good resistance to corrosive chemicals such as water, oils, petrol and alcoholic beverages. All our bearings can be used at temperatures between 0°C and +80°C.*
- *Ball bearings are made in chrome steel. They are also available, upon request, in stainless steel. Max misalignment between shaft and housing: 2.5°.*
- *Grease nipple are made in nickel plated steel, but they can also be made in stainless steel on the stainless steel bearing.*
- *Spacers from nickel plated brass to reinforce fixing holes.*
- *Washer stainless steel.*
- *Clip-on safety cap in Polyethylene.*
- *Rotary shaft seal ring in NBR rubber.*
- *O-ring in NBR rubber.*

KOMPONENTEN

- *Gehäuse gefertigt aus verstärktem Polyamid. Dies gewährleistet eine gute Widerstandsfähigkeit gegenüber mechanischen Einflüssen und eine gute Korrosionsbeständigkeit gegenüber Wasser, Ölen, Benzin, Flüssigkeiten mit Alkohol und Chemikalien. Alle unsere Gehäuse-Lagereinheiten können in einem Temperaturbereich von 0°C bis +80°C eingesetzt werden.*
- *Die Lagereinsätze sind aus Chrom-Stahl, auf Anfrage auch in Edelstahl erhältlich. Alle Lager gleichen eine Fluchtungsfehler von bis zu 2,5° selbstständig aus.*
- *Die Schmiernippel sind aus vernickeltem Stahl (aus Edelstahl wenn die Ausführung mit Edelstahl Einsatz gefragt ist).*
- *Alle Distanzstücke sind aus vernickeltem Messing und verstärken die Befestigungsbohrungen.*
- *Alle Unterlegscheiben aus Edelstahl.*
- *Schutzkappe aus Polyäthylen.*
- *Dichtringe aus NBR-Gummi.*
- *O-Ringe aus NBR-Gummi.*

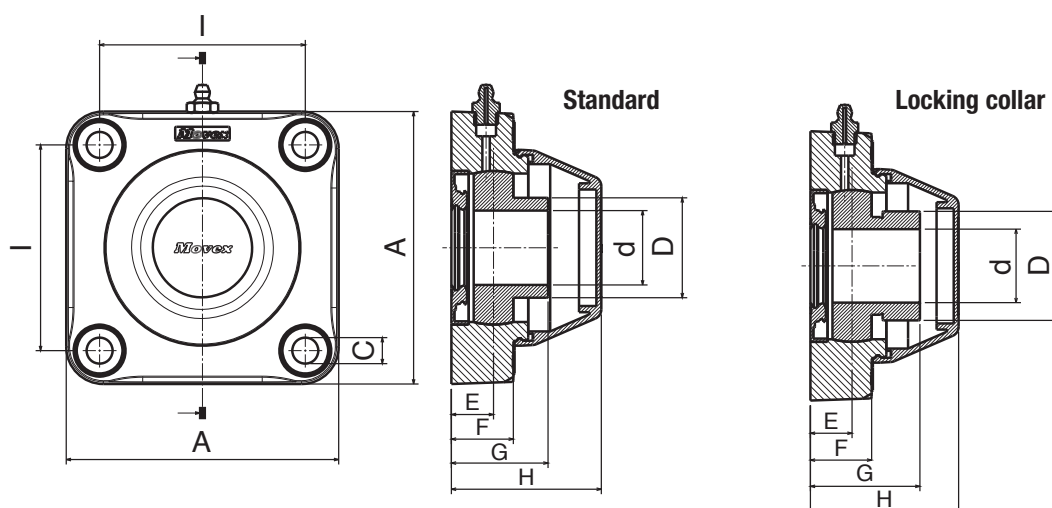

Inserto standard, con guarnizioni, versione aperta e chiusa / *Standard insert, sealed, open and close version,*
Standard-Flanschlager, abgedichtet, offene und geschlossene Version

Chrome steel	Part	Art-close	Part	Art-open	Series	d	I	A	C	D	E	F	G	H
	809	80901	810	81001	UCF205	25	70	98	11	34	16	22	35,5	51,5
	809	80902	810	81002	UCF206	30	83	110	11	40,3	17	25	39	60,5
	809	80903	810	81003	UCF207/83	35	83	110	11	48	20	25	43,5	65,5
	809	80913	810	81013	UCF207	35	92	118	11	48	20	25	43,5	65,5
	809	80904	810	81004	UCF208/83	40	83	110	11	53	19,5	25	44,5	65,5
	809	80914	810	81014	UCF208	40	102	130	11	53	19	25	44	65,5

Inserto standard, con guarnizioni, versione aperta e chiusa / *Standard insert, sealed, open and close version,*
Standard-Flanschlager, abgedichtet, offene und geschlossene Version


Stainless steel	Part	Art-close	Part	Art-open	Series	d	I	A	C	D	E	F	G	H
	809	80901SS	810	81001SS	UCF205	25	70	98	11	34	16	22	35,5	51,5
	809	80902SS	810	81002SS	UCF206	30	83	110	11	40,3	17	25	39	60,5
	809	80903SS	810	81003SS	UCF207/83	35	83	110	11	48	20	25	43,5	65,5
	809	80913SS	810	81013SS	UCF207	35	92	118	11	48	20	25	43,5	65,5
	809	80904SS	810	81004SS	UCF208/83	40	83	110	11	53	19,5	25	44,5	65,5
	809	80914SS	810	81014SS	UCF208	40	102	130	11	53	19	25	44	65,5

Inserto "Long life", con guarnizioni, versione aperta e chiusa / *"Long life" insert, sealed, open and close version,*
"Long life"-Flanschlager, abgedichtet, offene und geschlossene Version

Chrome steel - "Long life"	Part	Art-close	Part	Art-open	Series	d	I	A	C	D	E	F	G	H
	809	80901L	810	81001L	UCF205	25	70	98	11	34	16	22	35,5	51,5
	809	80902L	810	81002L	UCF206	30	83	110	11	40,3	17	25	39	60,5
	809	80903L	810	81003L	UCF207/83	35	83	110	11	48	20	25	43,5	65,5
	809	80913L	810	81013L	UCF207	35	92	118	11	48	20	25	43,5	65,5
	809	80904L	810	81004L	UCF208/83	40	83	110	11	53	19,5	25	44,5	65,5
	809	80914L	810	81014L	UCF208	40	102	130	11	53	19	25	44	65,5

Inserto con ghiera eccentrica, guarnizioni, versione aperta e chiusa / *Insert with locking collar, sealed, open and close version*
Flanschlager mit Exzenter-Klemmring, abgedichtet, offene und geschlossene Version

Chrome steel	Part	Art-close	Part	Art-open	Series	d	I	A	C	D	E	F	G	H
	811	81101	812	81201	UCF205	25	70	98	11	38,1	16	22	39,4	51,5
	811	81102	812	81202	UCF206	30	83	110	11	44,5	17	25	44,7	60,5
	811	81103	812	81203	UCF207/83	35	83	110	11	55,6	20	25	50,4	65,5
	811	81113	812	81213	UCF207	35	92	118	11	55,6	20	25	50,4	65,5
	811	81104	812	81204	UCF208/83	40	83	110	11	60,3	19,5	25	54,2	65,5
	811	81114	812	81214	UCF208	40	102	130	11	60,3	19	25	53,7	65,5

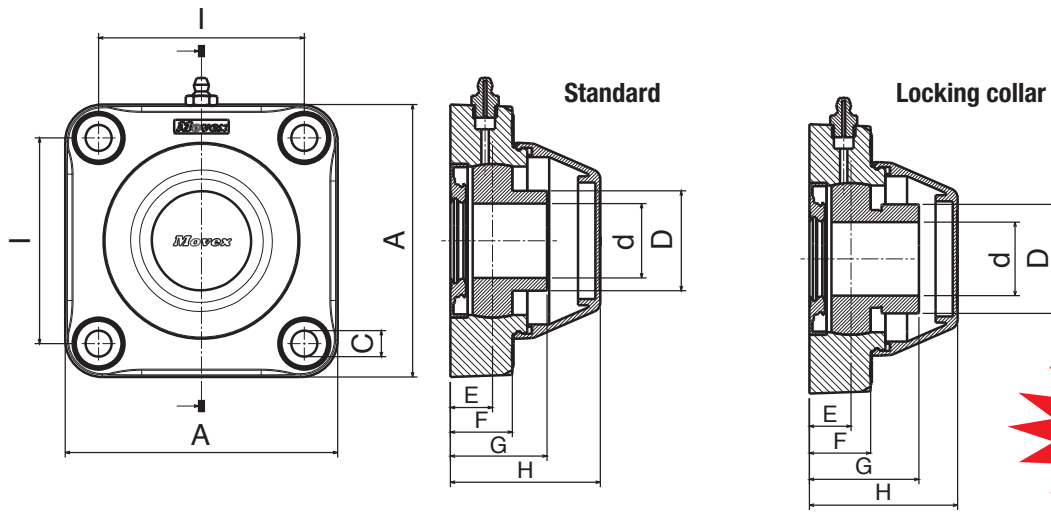

Inserto standard, con guarnizioni, versione aperta e chiusa / *Standard insert, sealed, open and close version, Standard-Flanschlager, abgedichtet, offene und geschlossene Version*

NEW

Chrome steel	Part	Art-close	Part	Art-open	Series	d	I	A	C	D	E	F	G	H
	830	83001	831	83101	UCF205	25	70	98	11	34	16	22	35,5	51,5
	830	83002	831	83102	UCF206	30	83	110	11	40,3	17	25	39	60,5
	830	83013	831	83113	UCF207	35	92	118	11	48	20	25	43,5	65,5
	830	83004	831	83104	UCF208/83	40	83	110	11	53	19,5	25	44,5	65,5

Inserto standard, con guarnizioni, versione aperta e chiusa / *Standard insert, sealed, open and close version, Standard-Flanschlager, abgedichtet, offene und geschlossene Version*

NEW

Stainless steel	Part	Art-close	Part	Art-open	Series	d	I	A	C	D	E	F	G	H
	830	83001SS	831	83101SS	UCF205	25	70	98	11	34	16	22	35,5	51,5
	830	83002SS	831	83102SS	UCF206	30	83	110	11	40,3	17	25	39	60,5
	830	83013SS	831	83113SS	UCF207	35	92	118	11	48	20	25	43,5	65,5
	830	83004SS	831	83104SS	UCF208/83	40	83	110	11	53	19,5	25	44,5	65,5

Inserto "Long life", con guarnizioni, versione aperta e chiusa / *"Long life" insert, sealed, open and close version, "Long life"-Flanschlager, abgedichtet, offene und geschlossene Version*

NEW

Chrome steel	Part	Art-close	Part	Art-open	Series	d	I	A	C	D	E	F	G	H
	830	83001L	831	83101L	UCF205	25	70	98	11	34	16	22	35,5	51,5
	830	83002L	831	83102L	UCF206	30	83	110	11	40,3	17	25	39	60,5
	830	83013L	831	83113L	UCF207	35	92	118	11	48	20	25	43,5	65,5
	830	83004L	831	83104L	UCF208/83	40	83	110	11	53	19,5	25	44,5	65,5

Inserto con ghiera eccentrica, guarnizioni, versione aperta e chiusa / *Insert with locking collar, sealed, open and close version Flanschlager mit Exzenter-Klemmring, abgedichtet, offene und geschlossene Version*

NEW

Chrome steel	Part	Art-close	Part	Art-open	Series	d	I	A	C	D	E	F	G	H
	832	83201	833	83301	UCF205	25	70	98	11	38,1	16	22	39,4	51,5
	832	83202	833	83302	UCF206	30	83	110	11	44,5	17	25	44,7	60,5
	832	83213	833	83313	UCF207	35	92	118	11	55,6	20	25	50,4	65,5
	832	83204	833	83304	UCF208/83	40	83	110	11	60,3	19,5	25	54,2	65,5



New

**COVER IN
STAINLESS STEEL**



COMPONENTI

- Sede in poliammide rinforzato, con elevata resistenza meccanica e ottima resistenza contro agenti chimici corrosivi quali acqua, oli, benzina e liquidi contenenti alcool. Tutti i nostri cuscinetti possono essere utilizzati ad una temperatura compresa fra 0°C e +80°C
- I cuscinetti sono realizzati in acciaio al cromo, disponibili anche, su richiesta, nella versione in acciaio inox. Il cuscinetto all'interno della flangia può essere regolato di 2,5°.
- L'ingrassatore viene realizzato in ferro nichelato, o in acciaio inox nella versione con il cuscinetto in acciaio inox.
- Distanziali realizzati in ottone nichelato per rinforzare il foro di fissaggio
- Rondella in acciaio inox.
- **"Cover"** in acciaio inox.



COMPONENTS

- *Housing in reinforced polyamide, with higher load capacity and good resistance to corrosive chemicals such as water, oils, petrol and alcoholic beverages. All our bearings can be used at temperatures between 0°C and +80°C.*
- *Ball bearings are made in chrome steel. They are also available, upon request, in stainless steel. Max misalignment between shaft and housing: 2.5°.*
- *Grease nipple are made in nickel plated steel, but they can also be made in stainless steel on the stainless steel bearing.*
- *Spacers from nickel plated brass to reinforce fixing holes.*
- *Washer stainless steel.*
- **"Cover"** in stainless steel


KOMPONENTEN

- *Gehäuse gefertigt aus verstärktem Polyamid. Dies gewährleistet eine gute Widerstandsfähigkeit gegenüber mechanischen Einflüssen und eine gute Korrosionsbeständigkeit gegenüber Wasser, Ölen, Benzin, Flüssigkeiten mit Alkohol und Chemikalien. Alle unsere Gehäuse-Lagereinheiten können in einem Temperaturbereich von 0°C bis +80°C eingesetzt werden.*
- *Die Lagereinsätze sind aus Chrom-Stahl, auf Anfrage auch in Edelstahl erhältlich. Alle Lager gleichen einen Fluchtungsfehler von bis zu 2,5° selbstständig aus.*
- *Die Schmiernippel sind aus vernickeltem Stahl (aus Edelstahl wenn die Ausführung mit Edelstahl Einsatz gefragt ist).*
- *Alle Distanzstücke sind aus vernickeltem Messing und verstärken die Befestigungsbohrungen*
- *Alle Unterlegscheiben aus Edelstahl.*
- **"Cover"** aus Edelstahl.

COVER IN
STAINLESS STEEL

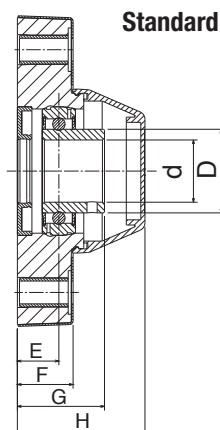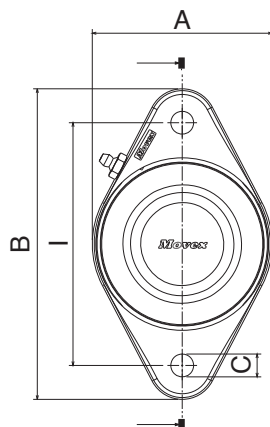

Standard



Locking collar

Solid
Housing

NEW Inserto standard, con guarnizioni, versione aperta e chiusa / Standard insert, sealed, open and close version / Standard-Flanschlager, abgedichtet, offene und geschlossene Version

Chrome steel	Part	Art-close	Part	Art-open	Series	d	l	A	B	C	D	E	F	G	H
	824	82412H	825	82512H	UCFL206	30	117	86,7	149,7	11	40,3	20	26,85	42	61,5
	824	82404H	825	82504H	UCFL208/117	40	117	94,7	149,7	11	53	19	26,85	44	67



NEW Inserto "long life", con guarnizioni, versione aperta e chiusa / "Long life" insert, sealed, open and close version / "Long Life"-Flanschlager, abgedichtet, offene und geschlossene Version

Chrome steel	Part	Art-close	Part	Art-open	Series	d	l	A	B	C	D	E	F	G	H
	824	82412LH	825	82512LH	UCFL206	30	117	86,7	149,7	11	40,3	20	26,85	42	61,5
	824	82404LH	825	82504LH	UCFL208/117	40	117	94,7	149,7	11	53	19	26,85	44	67


NEW Inserto con ghiera eccentrica, guarnizioni, versione aperta e chiusa / Insert with locking collar, sealed, open and close version / Flanschlager mit Exzenter-Klemmring, abgedichtet, offene und geschlossene Version

Chrome steel	Part	Art-close	Part	Art-open	Series	d	l	A	B	C	D	E	F	G	H
	826	82612H	827	82712H	UCFL206	30	117	86,7	149,7	11	44,5	20	26,85	47,7	61,5
	826	82604H	827	82704H	UCFL208/117	40	117	94,7	149,7	11	60,3	19	26,85	54	67

COVER IN
STAINLESS STEEL

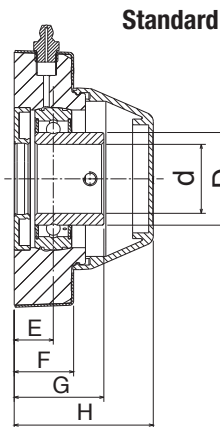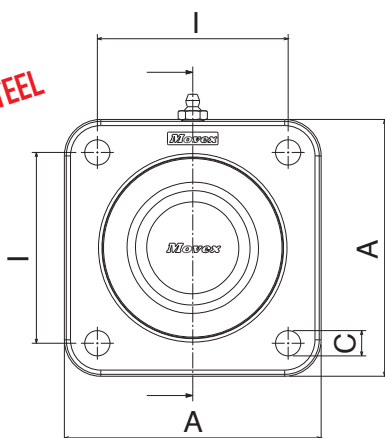

Standard



Locking collar

Solid
Housing

NEW Inserto standard, con guarnizioni, versione aperta e chiusa / Standard insert, sealed, open and close version / Standard-Flanschlager, abgedichtet, offene und geschlossene Version

Chrome steel	Part	Art-close	Part	Art-open	Series	d	l	A	C	D	E	F	G	H
	830	83002H	831	83102H	UCFL206	30	83	111,7	11	40,3	17	25	39	60,5
	830	83004H	831	83104H	UCFL208/83	40	83	111,7	11	53	19,5	25	44,5	65,5

NEW Inserto "long life", con guarnizioni, versione aperta e chiusa / "Long life" insert, sealed, open and close version / "Long Life"-Flanschlager, abgedichtet, offene und geschlossene Version

Chrome steel	Part	Art-close	Part	Art-open	Series	d	l	A	C	D	E	F	G	H
	830	83002LH	831	83102LH	UCFL206	30	83	111,7	11	40,3	17	25	39	60,5
	830	83004LH	831	83104LH	UCFL208/83	40	83	111,7	11	53	19,5	25	44,5	65,5

NEW Inserto con ghiera eccentrica, guarnizioni, versione aperta e chiusa / Insert with locking collar, sealed, open and close version / Flanschlager mit Exzenter-Klemmring, abgedichtet, offene und geschlossene Version

Chrome steel	Part	Art-close	Part	Art-open	Series	d	l	A	C	D	E	F	G	H
	832	83202H	833	83302H	UCFL206	30	83	111,7	11	44,5	17	25	47,7	60,5
	832	83204H	833	83304H	UCFL208/83	40	83	111,7	11	60,3	19,5	25	54,2	65,5



CUSCINETTI BIANCHI

- Sede in Poliammide Bianco.
- I cuscinetti sono realizzati in Acciaio Inox, è possibile regolarli di 2.5° all'interno della flangia.
- L'ingrassatore viene realizzato in Acciaio Inox.
- Distanziali realizzati in Acciaio Inox.
- Rondella per ingrassatore realizzata in Polietilene.

BEARING UNITS –WHITE–


- *Housing in reinforced Polyamide, white*
- *Ball bearings are made in stainless steel, they allow a misalignment between shaft and housing of max. 2.5°.*
- *Grease nipple made in stainless steel.*
- *Spacers in stainless steel to reinforce fixing holes.*
- *Washer for grease nipple in PE.*

FLANSCHLAGER –WEISS–

- *Lagergehäuse gefertigt aus verstärktem Polyamid, weiß.*
- *Lagereinsatz aus Edelstahl, alle Lager gleichen einen Fluchtungsfehler von bis zu 2,5° selbständig aus.*
- *Schmiernippel aus Edelstahl.*
- *Distanzstücke aus Edelstahl und verstärken die Befestigungsbohrungen.*
- *Unterlegscheibe für Schmiernippel aus Edelstahl.*



Series	Article-Nr.
FL204	89801
FL205	89802
FL206	89803
FL207	89804
FL208	89805

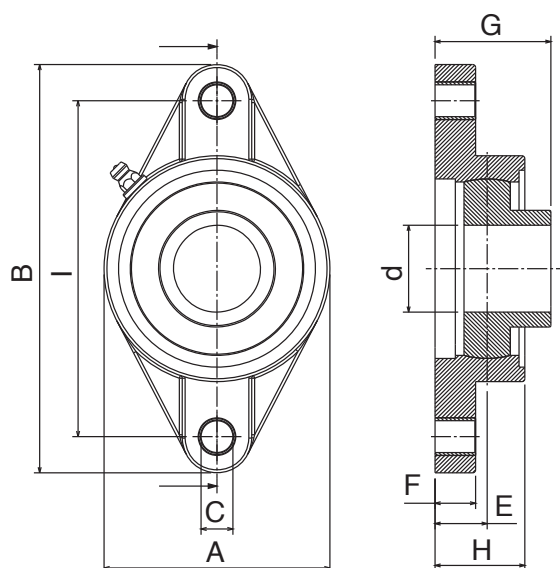


SS insert

FL

Inserto standard / Standard insert / Standard-Flanschlager

Part	Art.-Nr.	Series	d	I	A	B	C	E	F	G	H
813	81300	FL204	20	90	64	113	11	15,4	11,4	33,7	26,5
813	81301	FL205	25	99	70	131	11	17	13,5	36,7	29,1
813	81302	FL206	30	117	80	148	11	19	13,3	41,2	30,5
813	81303	FL207	35	130	90	164	13	18	16,1	43,4	32,8
813	81304	FL208	40	144	100	176	14	21,5	20	51,7	37,5

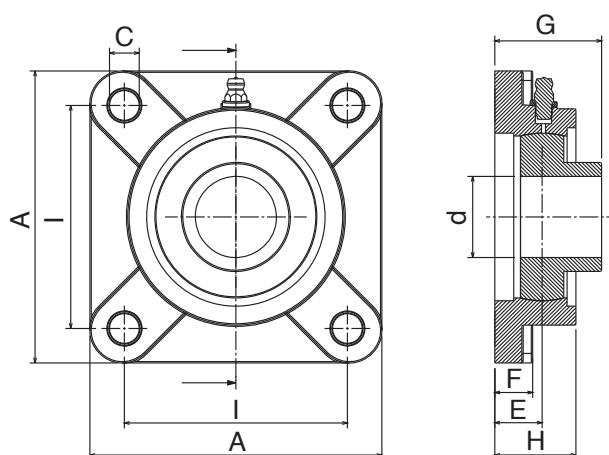


SS insert

F

Inserto standard / Standard insert / Standard-Flanschlager

Part	Art.-Nr.	Series	d	I	A	C	E	F	G	H
814	81400	F204	20	63,5	86	11	18	13,4	36,3	27,8
814	81401	F205	25	70	95	11	17	14	36,7	28,0
814	81402	F206	30	83	107	11	19,2	14,3	41,4	31,5
814	81403	F207	35	92	118	13	21,5	15,5	46,9	34,8
814	81404	F208	40	102	130	14	23	17	53,2	37,5

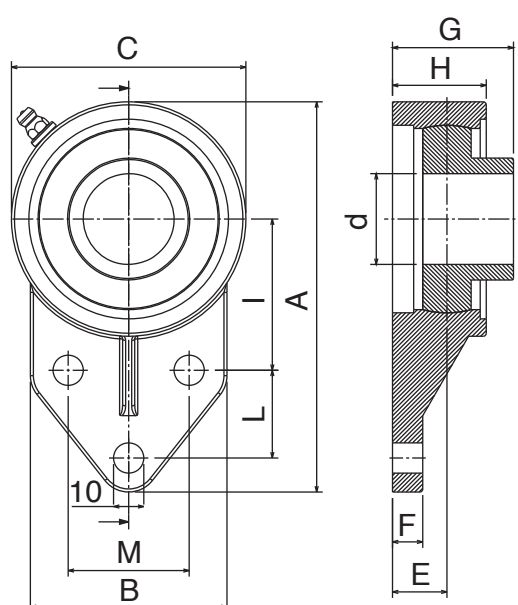

SS insert

FB-Stainless steel

Inserto standard / Standard insert / Standard-Flanschlager

Part	Art.-Nr.	Series	d	A	I	L	M	B	C	E	F	G	H
815	81500	FB204	20	108,5	42,9	22,2	38,1	62	62		12		26,2
815	81501	FB205	25	120,6	46	20,6	41,3	63,5	68,5		12		33,5
815	81502	FB206	30	140	52,4	31,8	47,6	75	83		14		31,5
815	81503	FB207	35	157	60,3	31,8	50,8	89	95		16		36,5
815	81504	FB208	40	164	60,3	41,3	50	78	100		18		35,7

FB-Chrome steel

Inserto standard / Standard insert / Standard-Flanschlager

Part	Art.-Nr.	Series	d	A	I	L	M	B	C	E	F	G	H
816	81600	FB204	20	108,5	42,9	22,2	38,1	62	62		12		26,2
816	81601	FB205	25	120,6	46	20,6	41,3	63,5	68,5		12		33,5
816	81602	FB206	30	140	52,4	31,8	47,6	75	83		14		31,5
816	81603	FB207	35	157	60,3	31,8	50,8	89	95		16		36,5
816	81604	FB208	40	164	60,3	41,3	50	78	100		18		35,7



CUSCINETTI ACCIAIO INOX

- Sede in Acciaio Inox, ottimale per l'utilizzo nei processi alimentari e farmaceutici.
- I cuscinetti sono realizzati in Acciaio inox, è possibile regolarli di 2.5° all'interno della flangia.
- Ingrassatore realizzato in Acciaio inox.
- Rondella per ingrassatore realizzata in Polietilene.


BEARING UNITS IN STAINLESS STEEL

- *Housing in stainless steel, best choice for processes in food or pharmaceutical industries.*
- *Ball bearings are made in stainless steel, they allow a misalignment between shaft and housing of max. 2.5°.*
- *Grease nipple made in stainless steel.*
- *Washer for grease nipple in PE.*

FLANSCHLAGER AUS EDELSTAHL

Flanschlager aus Edelstahl


- *Lagergehäuse aus Edelstahl, optimal für den Einsatz in der Lebensmittel- oder Pharmaindustrie.*
- *Lagereinsatz aus Edelstahl, alle Lager gleichen einen Fluchtungsfehler von bis zu 2,5° selbständig aus.*
- *Schmiernippel aus Edelstahl.*
- *Unterlegscheibe für Schmiernippel aus PE.*

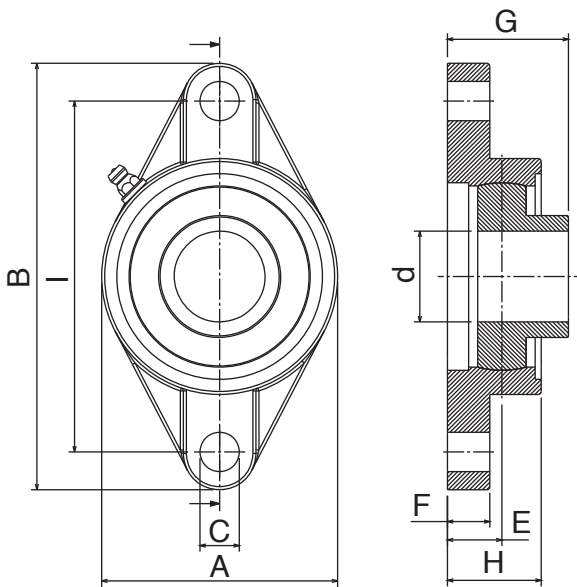

SUCFL

Inserto standard / Standard insert / Standard-Flanschlager


Part	Art.-Nr.	Series	d	I	A	B	C	E	F	G	H
817	81700	SUCFL 204	20	90	60	113	12	15	11	33,3	25,5
817	81701	SUCFL 205	25	99	68	130	16	16	13	35,8	27
817	81702	SUCFL 206	30	117	80	148	16	18	13	40,2	31
817	81703	SUCFL 207	35	130	90	161	16	19	15	44,4	34
817	81704	SUCFL 208	40	144	100	175	16	21	15	51,2	36

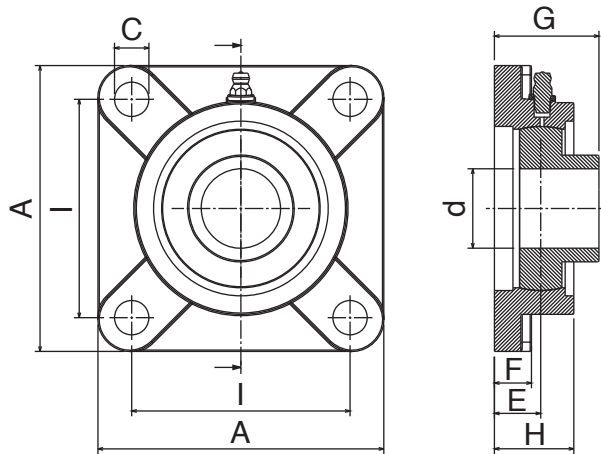

SUCF

Inserto standard / Standard insert / Standard-Flanschlager



Part	Art.-Nr.	Series	d	I	A	C	E	F	G	H
819	81900	SUCF 204	20	64	86	12	15	12	33,3	25,5
819	81901	SUCF 205	25	70	95	12	16	14	35,8	27
819	81902	SUCF 206	30	83	108	12	18	14	40,2	31
819	81903	SUCF 207	35	92	117	14	19	15	44,4	34
819	81904	SUCF 208	40	102	130	16	21	15	51,2	36

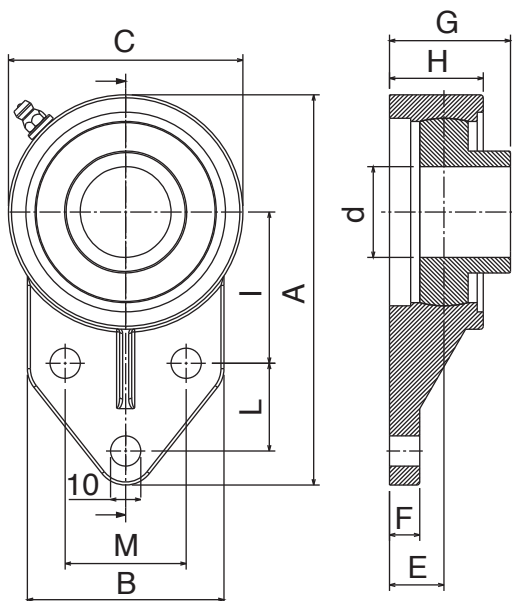

SUCFK

Inserto standard / Standard insert / Standard-Flanschlager

Part	Art.-Nr.	Series	d	A	I	L	M	B	C	E	F	G	H
821	82100	SUCFK 204	20	110	42	27	32	52	62	15	13	33,3	25,5
821	82101	SUCFK 205	25	116	45	27	34	56	68	16	13	35,7	27
821	82102	SUCFK 206	30	130	50	29	40	65	78	18	13	40,2	31
821	82103	SUCFK 207	35	144	55	32	46	70	90	19	15	44,4	34
821	82104	SUCFK 208	40	164	60	41	50	78	100	21	16	51,2	36

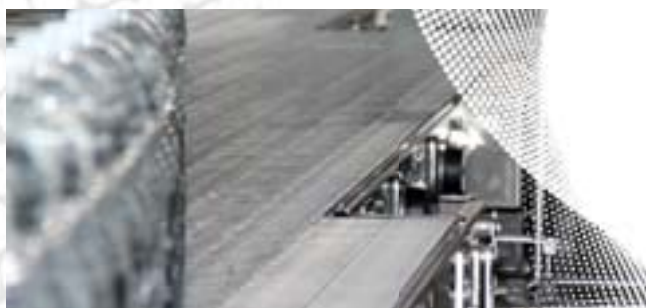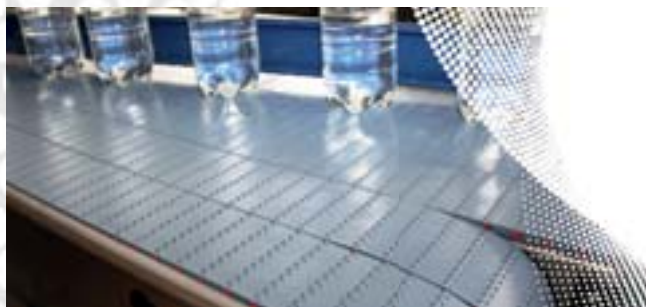

leveling pads

Ø40-Ø50-Ø60



pag. 206

Ø80-Ø100



pag. 208

Ø80-Ø100-Ø120



pag. 210

Ø110



pag. 212

Ø123



pag. 214

Ø123



pag. 216

Ø50-Ø75-Ø100-Ø125



pag. 218

Ø75-Ø100



pag. 220



Ø123



pag. 222



Materiale:	Material:	Materialien:
Basi: Poliammide	Base plate: Polyamide	Fussplatte: Polyamid
Stelo: Acciaio inox o Ferro zincato	Spindle: Stainless steel or Zinc plated steel	Spindel: Edelstahl oder Stahl Verzinkt

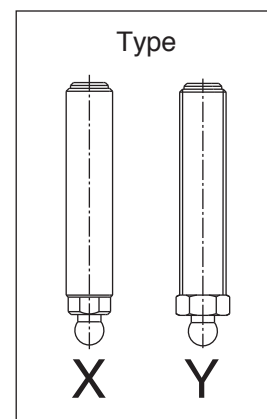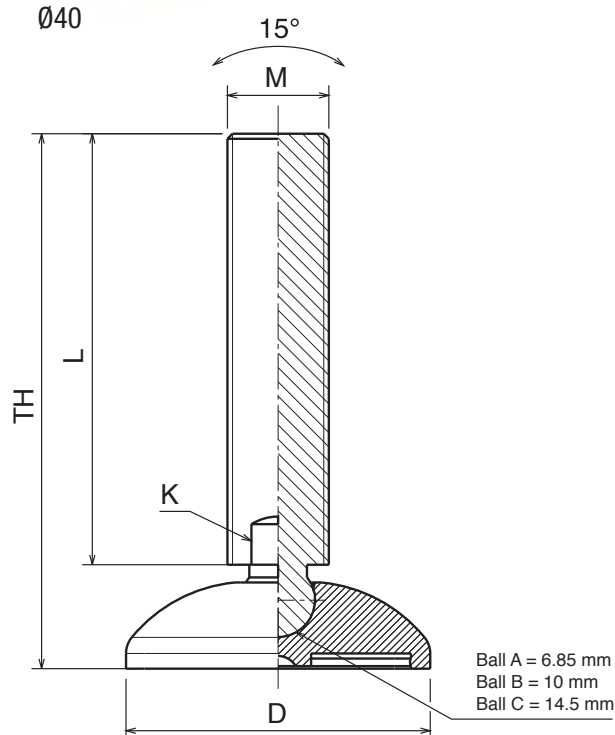

ACCESSORI / ACCESSORIES / ZUBEHÖR

Gomma anti-scivolo / Anti-slip pad / Gummiplatte



Part	Article-Nr.	For base
996	99601	Ø40
996	99602	Ø50
996	99603	Ø60

Dadi acciaio inox / Stainless steel nuts / Mutter Edelstahl




Part	Article-Nr.	Spindle
998	99801	M10
998	99802	M12
998	99804	M16
998	99805	M20

Piede diam. 40 mm / Leveller diam. 40 mm / Gelenkfuss Diam. 40 mm

Spindle material										
Part	Art.-Nr. SS	Art.-Nr. FeZn	D	Spindle	K	TH	L	Ball	Type	N
901	90101	90101Z	40	M10	7	50	35	A	X	10.000
901	90102	90102Z	40	M10	7	100	85	A	X	10.000
901	90103	90103Z	40	M10	7	150	135	A	X	10.000
902	90201	90201Z	40	M12	9	75	60	B	X	12.000
902	90202	90202Z	40	M12	9	100	85	B	X	12.000
902	90203	90203Z	40	M12	9	150	135	B	X	12.000
903	90301	90301Z	40	M16	13	75	60	B	X	15.000
903	90302	90302Z	40	M16	13	100	85	B	X	15.000
903	90303	90303Z	40	M16	13	150	135	B	X	15.000
903	90301H	90301ZH	40	M16	16	75	60	B	Y	15.000
903	90302H	90302ZH	40	M16	16	100	85	B	Y	15.000
903	90303H	90303ZH	40	M16	16	150	135	B	Y	15.000

SS: Acciaio inox / Stainless steel / Edelstahl

FeZn: Ferro zincato / Zinc plated steel / Stahl Verzinkt

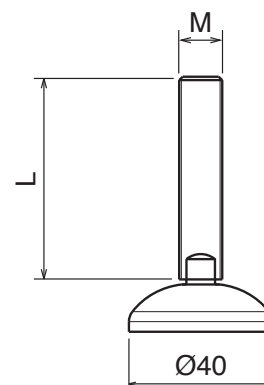


Piede diam. 50 mm / Leveller diam. 50 mm / Gelenkfuss Diam. 50 mm

Spindle material										
Part	Art.-Nr. SS	Art.-Nr. FeZn	D	Spindle	K	TH	L	Ball	Type	N
904	90401	90401Z	50	M10	7	50	35	A	X	10.000
904	90402	90402Z	50	M10	7	100	85	A	X	10.000
904	90403	90403Z	50	M10	7	150	135	A	X	10.000
905	90501	90501Z	50	M12	9	75	60	B	X	12.000
905	90502	90502Z	50	M12	9	100	85	B	X	12.000
905	90503	90503Z	50	M12	9	150	135	B	X	12.000
906	90601	90601Z	50	M16	13	75	60	B	X	15.000
906	90602	90602Z	50	M16	13	100	85	B	X	15.000
906	90603	90603Z	50	M16	13	150	135	B	X	15.000
906	90601H	90601ZH	50	M16	16	75	60	B	Y	15.000
906	90602H	90602ZH	50	M16	16	100	85	B	Y	15.000
906	90603H	90603ZH	50	M16	16	150	135	B	Y	15.000

SS: Acciaio inox / Stainless steel / Edelstahl

FeZn: Ferro zincato / Zinc plated steel / Stahl Verzinkt

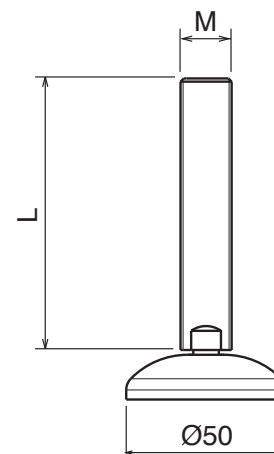


Piede diam. 60 mm / Leveller diam. 60 mm / Gelenkfuss Diam. 60 mm


Spindle material										
Part	Art.-Nr. SS	Art.-Nr. FeZn	D	Spindle	K	TH	L	Ball	Type	N
907	90701	90701Z	60	M12	9	80	60	B	X	12.000
907	90702	90702Z	60	M12	9	105	85	B	X	12.000
907	90703	90703Z	60	M12	9	155	135	B	X	12.000
908	90801	90801Z	60	M16	13	105	85	B	X	15.000
908	90802	90802Z	60	M16	13	155	135	B	X	15.000
908	90803	90803Z	60	M16	13	205	185	B	X	15.000
908	90801H	90801ZH	60	M16	16	105	85	B	Y	15.000
908	90802H	90802ZH	60	M16	16	155	135	B	Y	15.000
908	90803H	90803ZH	60	M16	16	205	185	B	Y	15.000
909	90901	90901Z	60	M20	16	105	85	C	X	16.000
909	90902	90902Z	60	M20	16	155	135	C	X	16.000
909	90903	90903Z	60	M20	16	205	185	C	X	16.000
909	90901H	90901ZH	60	M20	20	105	85	C	Y	16.000
909	90902H	90902ZH	60	M20	20	155	135	C	Y	16.000
909	90903H	90903ZH	60	M20	20	205	185	C	Y	16.000

SS: Acciaio inox / Stainless steel / Edelstahl

FeZn: Ferro zincato / Zinc plated steel / Stahl Verzinkt

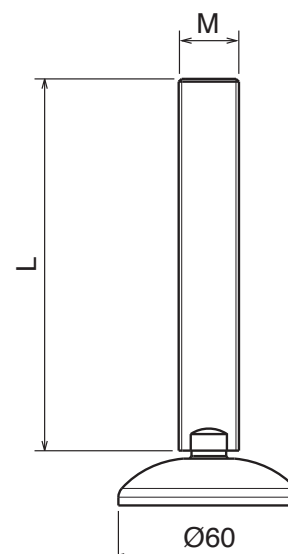

Materiale:	Material:	Materialien:
Basi: Poliammide	<i>Base plate: Polyamide</i>	<i>Fussplatte: Polyamid</i>
Stelo: Acciaio inox o Ferro zincato	<i>Spindle: Stainless steel or Zinc plated steel</i>	<i>Spindel: Edelstahl oder Stahl Verzinkt</i>

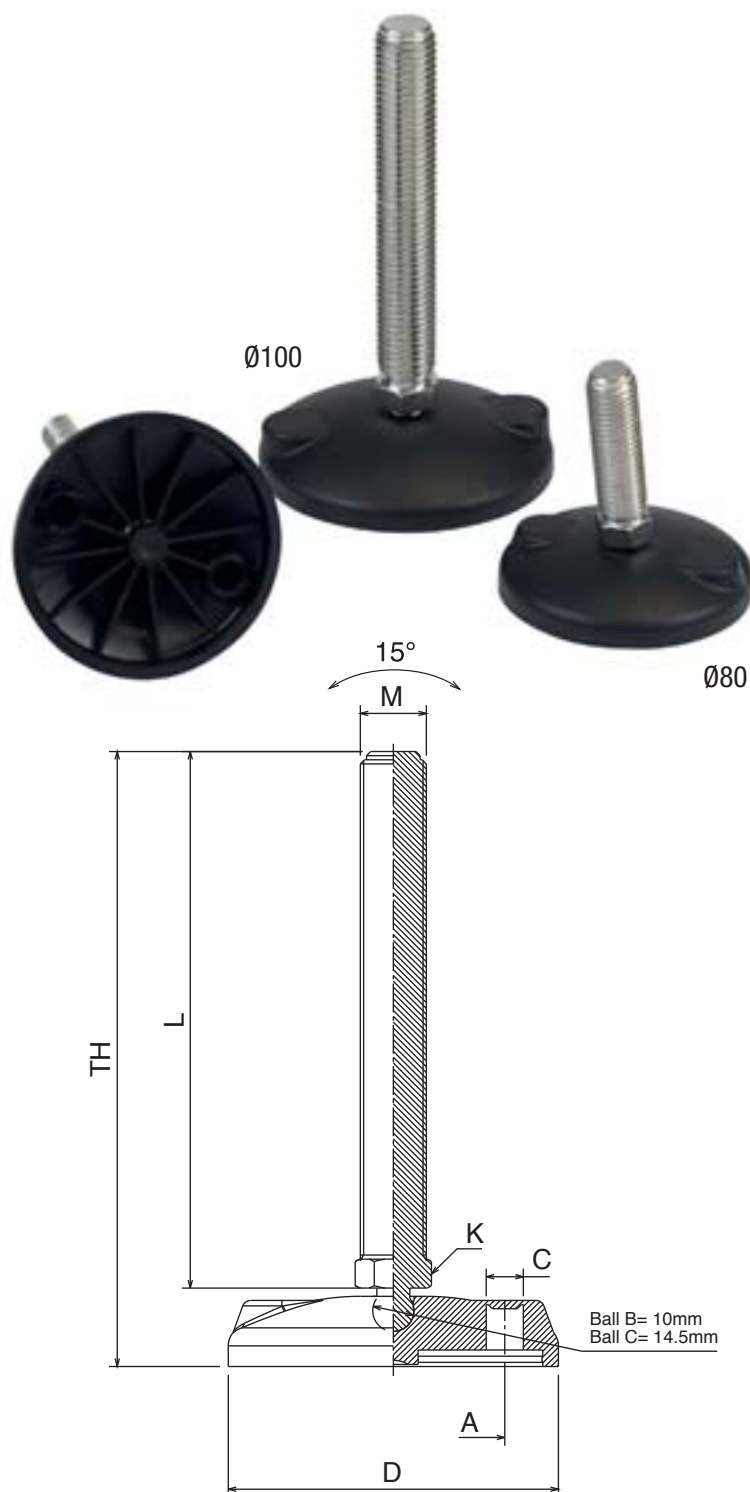

ACCESSORI / ACCESSORIES / ZUBEHÖR

Gomma anti-scivolo / Anti-slip pad / Gummiplatte



Part	Article-Nr.	For base
996	99604	Ø80
996	99605	Ø100

Dadi acciaio inox / *Stainless steel nuts* / Mutter Edelstahl




Part	Article-Nr.	Spindle
998	99802	M12
998	99804	M16
998	99805	M20

Piede diam. 80 mm / Leveller diam. 80 mm / Gelenkfuss Diam. 80 mm

Spindle material 										
Part	Art.-Nr. SS	Art.-Nr. FeZn	D	Spindle	K	TH	L	Ball	Type	N
953	95301	95301Z	80	M12	9	80	60	B	X	12.000
953	95302	95302Z	80	M12	9	105	85	B	X	12.000
953	95303	95303Z	80	M12	9	155	135	B	X	12.000
954	95401	95401Z	80	M16	13	105	85	B	X	15.000
954	95402	95402Z	80	M16	13	155	135	B	X	15.000
954	95403	95403Z	80	M16	13	205	185	B	X	15.000
954	95401H	95401ZH	80	M16	16	105	85	B	Y	15.000
954	95402H	95402ZH	80	M16	16	155	135	B	Y	15.000
954	95403H	95403ZH	80	M16	16	205	185	B	Y	15.000
955	95501	95501Z	80	M20	16	105	85	C	X	18.000
955	95502	95502Z	80	M20	16	155	135	C	X	18.000
955	95503	95503Z	80	M20	16	205	185	C	X	18.000
955	95501H	95501ZH	80	M20	20	105	85	C	Y	18.000
955	95502H	95502ZH	80	M20	20	155	135	C	Y	18.000
955	95503H	95503ZH	80	M20	20	205	185	C	Y	18.000

SS: Acciaio inox / Stainless steel / Edelstahl

FeZn: Ferro zincato / Zinc plated steel / Stahl Verzinkt

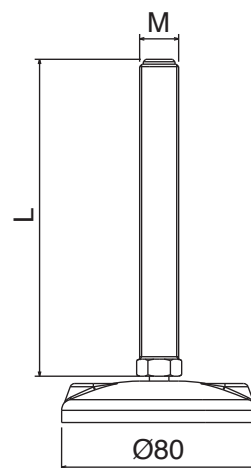


Piede diam. 100 mm / Leveller diam. 100 mm / Gelenkfuss Diam. 100 mm

Spindle material 										
Part	Art.-Nr. SS	Art.-Nr. FeZn	D	Spindle	K	TH	L	Ball	Type	N
956	95601	95601Z	100	M16	13	108	85	B	X	15.000
956	95602	95602Z	100	M16	13	158	135	B	X	15.000
956	95603	95603Z	100	M16	13	208	185	B	X	15.000
956	95601H	95601ZH	100	M16	16	108	85	B	Y	15.000
956	95602H	95602ZH	100	M16	16	158	135	B	Y	15.000
956	95603H	95603ZH	100	M16	16	208	185	B	Y	15.000
957	95701	95701Z	100	M20	16	108	85	C	X	18.000
957	95702	95702Z	100	M20	16	158	135	C	X	18.000
957	95703	95703Z	100	M20	16	208	185	C	X	18.000
957	95701H	95701ZH	100	M20	20	108	85	C	Y	18.000
957	95702H	95702ZH	100	M20	20	158	135	C	Y	18.000
957	95703H	95703ZH	100	M20	20	208	185	C	Y	18.000

SS: Acciaio inox / Stainless steel / Edelstahl


FeZn: Ferro zincato / Zinc plated steel / Stahl Verzinkt

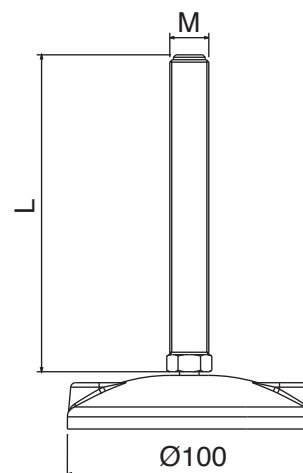

Piede diam. 60-80-100 mm / Leveller diam. 60-80-100 mm / Gelenkfuss Diam. 60-80-100 mm

						
Part	Art.-Nr.	D	Spindle	K	Type	N
908	90810PH	60	M16	24	C	13.000
954	95410PH	80	M16	24	C	13.000
957	95710PH	100	M16	24	C	13.000



Base and spindle: Poliammide / Polyamide / Polyamid

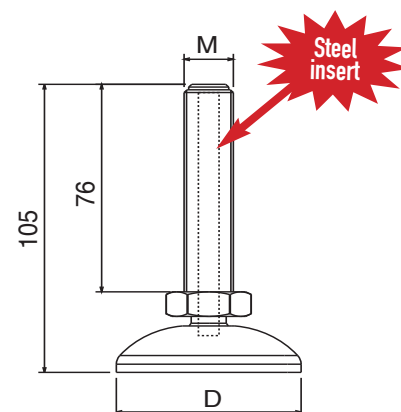

910-918 STANDARD

Piede snodato
Adjustable leveller
Gelenkfuss

Materiale:	Material:	Materialien:
Basi: Poliammide	Base plate: Polyamide	Fussplatte: Polyamid
Stelo: Acciaio inox o Ferro zincato	Spindle: Stainless steel or Zinc plated steel	Spindel: Edelstahl oder Stahl Verzinkt

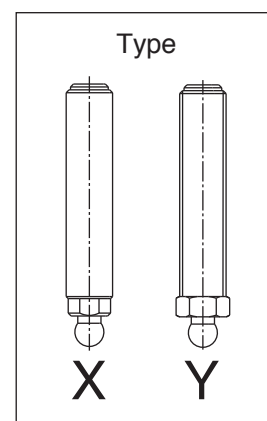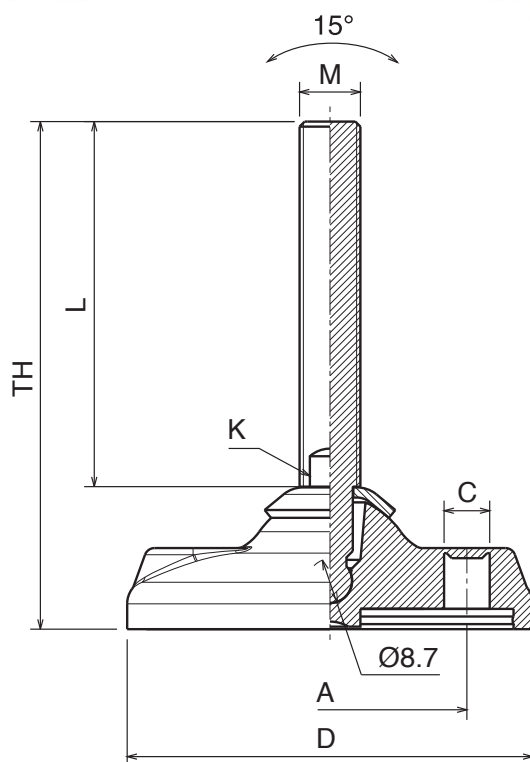

ACCESSORI / ACCESSORIES / ZUBEHÖR

Gomma anti-scivolo / Anti-slip pad / Gummiplatte



Part	Article-Nr.	For base
996	99604	Ø80
996	99605	Ø100
996	99606	Ø120

Dadi acciaio inox / Stainless steel nuts / Mutter Edelstahl



Part	Article-Nr.	Spindle
998	99802	M12
998	99804	M16
998	99805	M20
998	99806	M24

Piede diam. 80 mm / Leveller diam. 80 mm / Gelenkfuss Diam. 80 mm

Spindle material											N
Part	Art.-Nr. SS	Art.-Nr. FeZn	D	Spindle	K	TH	L	A	C	Type	
910	91001	91001Z	80	M12	9	100	72	54	9	X	12.000
910	91002	91002Z	80	M12	9	150	122	54	9	X	12.000
910	91003	91003Z	80	M12	9	200	172	54	9	X	12.000
911	91101	91101Z	80	M16	13	95	67	54	9	X	15.000
911	91102	91102Z	80	M16	13	145	117	54	9	X	15.000
911	91103	91103Z	80	M16	13	195	167	54	9	X	15.000
911	91101H	91101ZH	80	M16	16	95	67	54	9	Y	15.000
911	91102H	91102ZH	80	M16	16	145	117	54	9	Y	15.000
911	91103H	91103ZH	80	M16	16	195	167	54	9	Y	15.000
912	91201	91201Z	80	M20	16	120	92	54	9	X	16.000
912	91202	91202Z	80	M20	16	170	142	54	9	X	16.000
912	91203	91203Z	80	M20	16	220	192	54	9	X	16.000
912	91201H	91201ZH	80	M20	20	120	92	54	9	Y	16.000
912	91202H	91202ZH	80	M20	20	170	142	54	9	Y	16.000
912	91203H	91203ZH	80	M20	20	220	192	54	9	Y	16.000

SS: Acciaio inox / Stainless steel / Edelstahl

FeZn: Ferro zincato / Zinc plated steel / Stahl Verzinkt

Piede diam. 100 mm / Leveller diam. 100 mm / Gelenkfuss Diam. 100 mm

Spindle material											N
Part	Art.-Nr. SS	Art.-Nr. FeZn	D	Spindle	K	TH	L	A	C	Type	
913	91301	91301Z	100	M16	13	100	67	74	13	X	15.000
913	91302	91302Z	100	M16	13	150	117	74	13	X	15.000
913	91303	91303Z	100	M16	13	200	167	74	13	X	15.000
913	91301H	91301ZH	100	M16	16	100	67	74	13	Y	15.000
913	91302H	91302ZH	100	M16	16	150	117	74	13	Y	15.000
913	91303H	91303ZH	100	M16	16	200	167	74	13	Y	15.000
914	91401	91401Z	100	M20	16	125	92	74	13	X	16.000
914	91402	91402Z	100	M20	16	175	142	74	13	X	16.000
914	91403	91403Z	100	M20	16	225	192	74	13	X	16.000
914	91401H	91401ZH	100	M20	20	125	92	74	13	Y	16.000
914	91402H	91402ZH	100	M20	20	175	142	74	13	Y	16.000
914	91403H	91403ZH	100	M20	20	225	192	74	13	Y	16.000
915	91501	91501Z	100	M24	19	125	92	74	13	X	18.000
915	91502	91502Z	100	M24	19	175	142	74	13	X	18.000
915	91503	91503Z	100	M24	19	225	192	74	13	X	18.000

SS: Acciaio inox / Stainless steel / Edelstahl




FeZn: Ferro zincato / Zinc plated steel / Stahl Verzinkt

Piede diam. 120 mm / Leveller diam. 120 mm / Gelenkfuss Diam. 120 mm


Spindle material											N
Part	Art.-Nr. SS	Art.-Nr. FeZn	D	Spindle	K	TH	L	A	C	Type	
916	91601	91601Z	120	M16	13	100	67	90	13	X	15.000
916	91602	91602Z	120	M16	13	150	117	90	13	X	15.000
916	91603	91603Z	120	M16	13	200	167	90	13	X	15.000
916	91601H	91601ZH	120	M16	16	100	67	90	13	Y	15.000
916	91602H	91602ZH	120	M16	16	150	117	90	13	Y	15.000
916	91603H	91603ZH	120	M16	16	200	167	90	13	Y	15.000
917	91701	91701Z	120	M20	16	125	92	90	13	X	16.000
917	91702	91702Z	120	M20	16	175	142	90	13	X	16.000
917	91703	91703Z	120	M20	16	225	192	90	13	X	16.000
917	91701H	91701ZH	120	M20	20	125	92	90	13	Y	16.000
917	91702H	91702ZH	120	M20	20	175	142	90	13	Y	16.000
917	91703H	91703ZH	120	M20	20	225	192	90	13	Y	16.000
918	91801	91801Z	120	M24	19	125	92	90	13	X	18.000
918	91802	91802Z	120	M24	19	175	142	90	13	X	18.000
918	91803	91803Z	120	M24	19	225	192	90	13	X	18.000

SS: Acciaio inox / Stainless steel / Edelstahl

FeZn: Ferro zincato / Zinc plated steel / Stahl Verzinkt

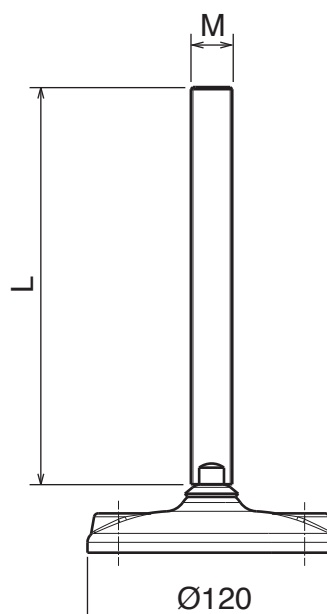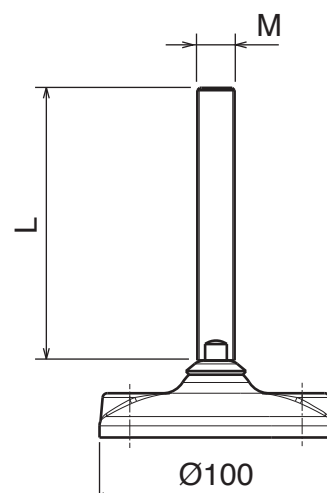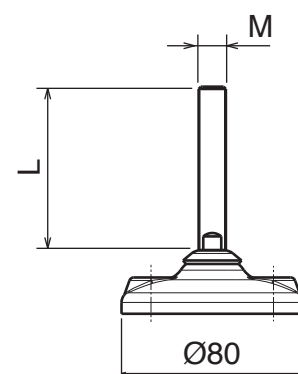

Materiale:	Material:	Materialien:
Basi: Poliammide	Base plate: Polyamide	Fussplatte: Polyamid
Stelo: Acciaio inox o Ferro zincato	Spindle: Stainless steel or Zinc plated steel	Spindel: Edelstahl oder Stahl Verzinkt

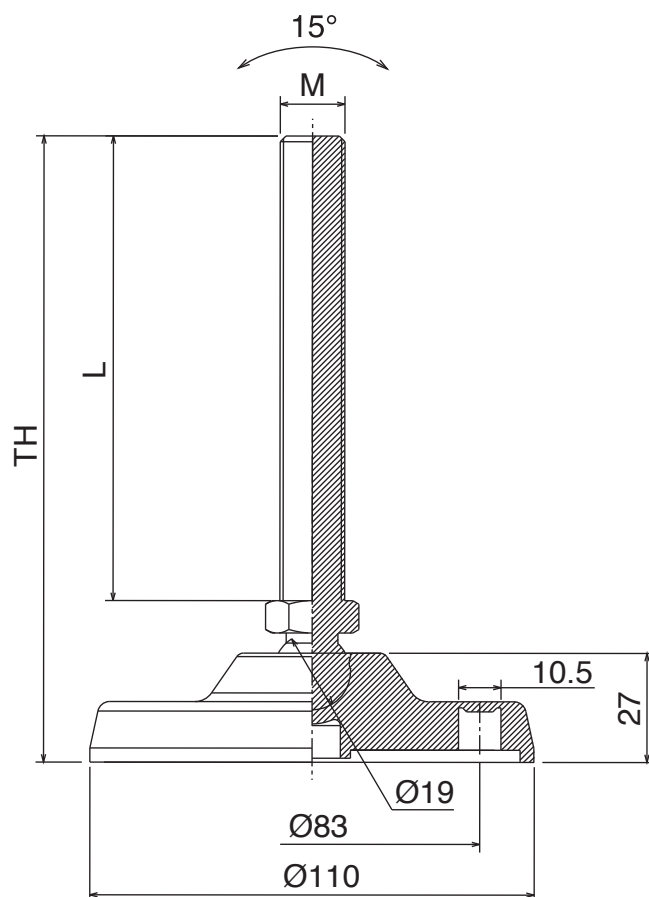

ACCESSORI / ACCESSORIES / ZUBEHÖR

Gomma anti-scivolo / Anti-slip pad / Gummiplatte



Part	Article-Nr.	For base
996	99607	Ø110

Dadi acciaio inox / Stainless steel nuts / Mutter Edelstahl




Part	Article-Nr.	Spindle
998	99804	M16
998	99805	M20
998	99806	M24

Piede diam. 110 mm / Leveller diam. 110 mm / Gelenkfuss Diam. 110 mm

Spindle material							
Part	Art.-Nr. SS	Art.-Nr. FeZn	Spindle	K	TH	L	N
943	94301H	94301ZH	M16	20	155	115	15.000
943	94302H	94302ZH	M16	20	185	145	15.000
943	94303H	94303ZH	M16	20	235	195	15.000
944	94401H	94401ZH	M20	20	155	115	15.000
944	94402H	94402ZH	M20	20	185	145	15.000
944	94403H	94403ZH	M20	20	235	195	15.000
945	94501H	94501ZH	M24	24	155	115	18.000
945	94502H	94502ZH	M24	24	185	145	18.000
945	94503H	94503ZH	M24	24	235	195	18.000

SS: Acciaio inox / Stainless steel / Edelstahl

FeZn: Ferro zincato / Zinc plated steel / Stahl Verzinkt

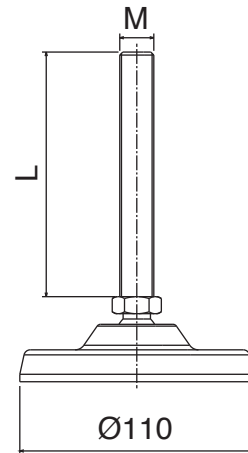


Piede diam. 110 mm / Leveller diam. 110 mm / Gelenkfuss Diam. 110 mm


Spindle material							
Part	Art.-Nr. SS	Art.-Nr. FeZn	Spindle	K	TH	L	N
946	94601H	94601ZH	M16	20	155	115	12.000
946	94602H	94602ZH	M16	20	185	145	12.000
946	94603H	94603ZH	M16	20	235	195	12.000
947	94701H	94701ZH	M20	20	155	115	12.000
947	94702H	94702ZH	M20	20	185	145	12.000
947	94703H	94703ZH	M20	20	235	195	12.000

SS: Acciaio inox / Stainless steel with PA sphere / Edelstahl

FeZn: Ferro zincato / Zinc plated steel with PA sphere / Stahl Verzinkt

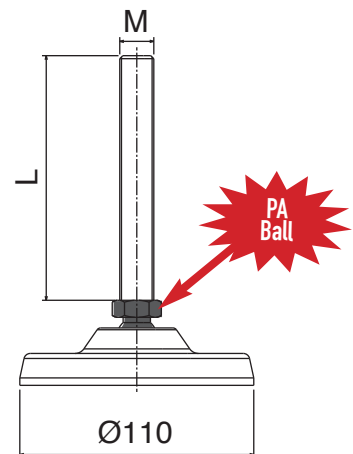

Materiale:	Material:	Materialien:
Basi: Poliammide	Base plate: Polyamide	Fussplatte: Polyamid
Stelo: Acciaio inox o Ferro zincato	Spindle: Stainless steel or Zinc plated steel	Spindel: Edelstahl oder Stahl Verzinkt

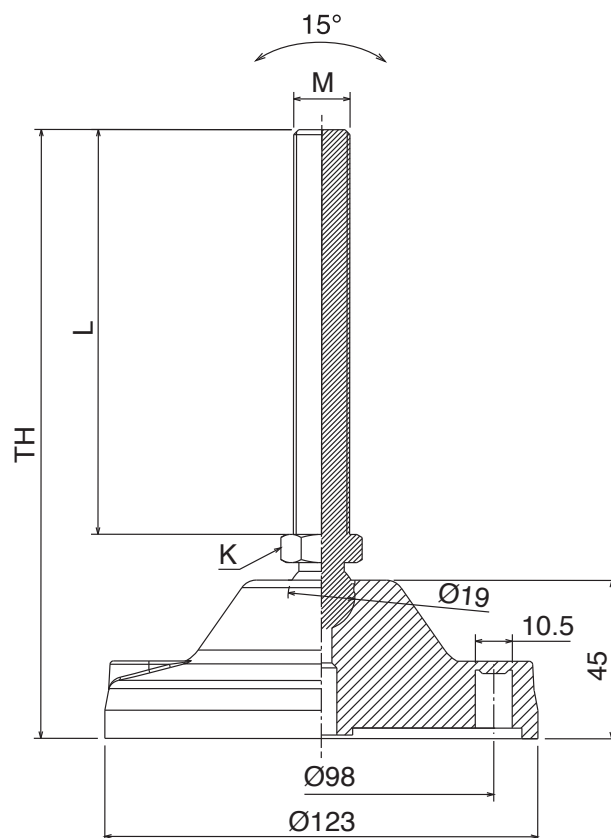

ACCESSORI / ACCESSORIES / ZUBEHÖR

Gomma anti-scivolo / Anti-slip pad / Gummiplatte



Part	Article-Nr.	For base
996	99608	Ø123

Dadi acciaio inox / Stainless steel nuts / Mutter Edelstahl




Part	Article-Nr.	Spindle
998	99804	M16
998	99805	M20
998	99806	M24

Piede diam. 123 mm / Leveller diam. 123 mm / Gelenkfuss Diam. 123 mm

Spindle material							
Part	Art.-Nr. SS	Art.-Nr. FeZn	Spindle	K	TH	L	N
948	94801H	94801ZH	M16	20	175	115	25.000
948	94802H	94802ZH	M16	20	205	145	25.000
948	94803H	94803ZH	M16	20	255	195	25.000
949	94901H	94901ZH	M20	20	175	115	25.000
949	94902H	94902ZH	M20	20	205	145	25.000
949	94903H	94903ZH	M20	20	255	195	25.000
950	95001H	95001ZH	M24	24	175	115	25.000
950	95002H	95002ZH	M24	24	205	145	25.000
950	95003H	95003ZH	M24	24	255	195	25.000

SS: Acciaio inox / Stainless steel / Edelstahl

FeZn: Ferro zincato / Zinc plated steel / Stahl Verzinkt

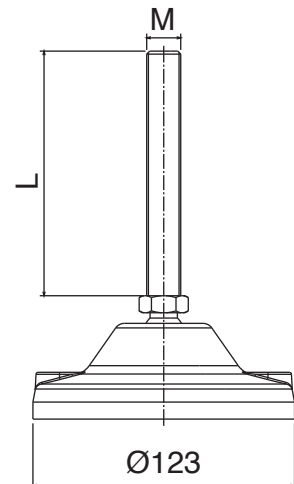


Piede diam. 123 mm / Leveller diam. 123 mm / Gelenkfuss Diam. 123 mm

Spindle material							
Part	Art.-Nr. SS	Art.-Nr. FeZn	Spindle	K	TH	L	N
951	95101H	95101ZH	M16	20	175	115	20.000
951	95102H	95102ZH	M16	20	205	145	20.000
951	95103H	95103ZH	M16	20	255	195	20.000
952	95201H	95201ZH	M20	20	175	115	20.000
952	95202H	95202ZH	M20	20	205	145	20.000
952	95203H	95203ZH	M20	20	255	195	20.000

SS: Acciaio inox / Stainless steel with PA sphere / Edelstahl


FeZn: Ferro zincato / Zinc plated steel with PA sphere / Stahl Verzinkt

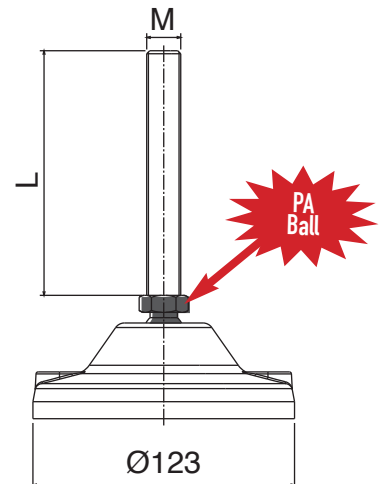

Materiale:	Material:	Materialien:
Basi: Poliammide	Base plate: Polyamide	Fussplatte: Polyamid
Stelo: Acciaio inox o Ferro zincato	Spindle: Stainless steel or Zinc plated steel	Spindel: Edelstahl oder Stahl Verzinkt



Ø123

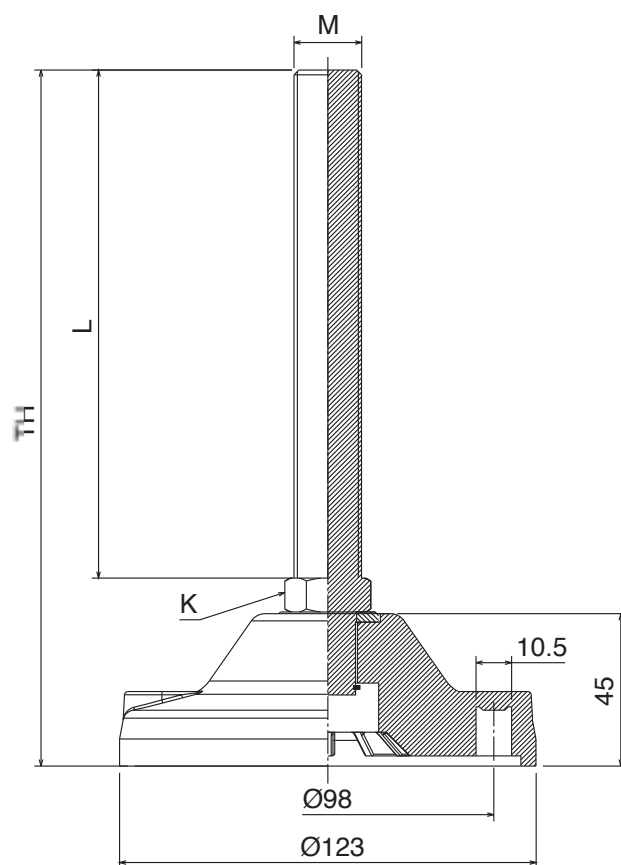

ACCESSORI / ACCESSORIES / ZUBEHÖR

Gomma anti-scivolo / Anti-slip pad / Gummiplatte



Part	Article-Nr.	For base
996	99608	Ø123

Dadi acciaio inox / Stainless steel nuts / Mutter Edelstahl




Part	Article-Nr.	Spindle
998	99804	M16
998	99805	M20
998	99806	M24

Piede diam. 123 mm / Leveller diam. 123 mm / Gelenkfuss Diam. 123 mm

Spindle material								
Part	Art.-Nr. SS	Art.-Nr. FeZn	Spindle	K	TH	L	N	
958	95801H	95801ZH	M20	20	150	98	30.000	
958	95802H	95802ZH	M20	20	200	148	30.000	
958	95803H	95803ZH	M20	20	250	198	30.000	
959	95901H	95901ZH	M24	24	150	98	30.000	
959	95902H	95902ZH	M24	24	200	148	30.000	
959	95903H	95903ZH	M24	24	250	198	30.000	

SS: Acciaio inox / Stainless steel / Edelstahl

FeZn: Ferro zincato / Zinc plated steel / Stahl Verzinkt

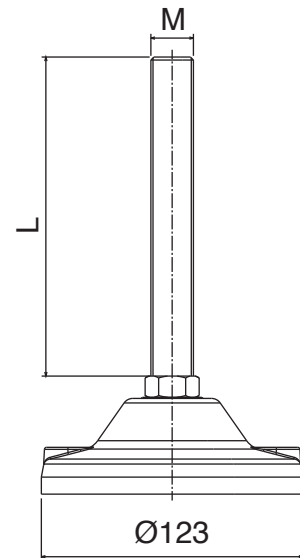

Materiale:


Basi, stelo e rondella:
Acciaio inox

Material:

Base plate, spindle and
washer: Stainless steel

Materialien:

Fussplatte, Spindel und
Scheibe: Edelstahl

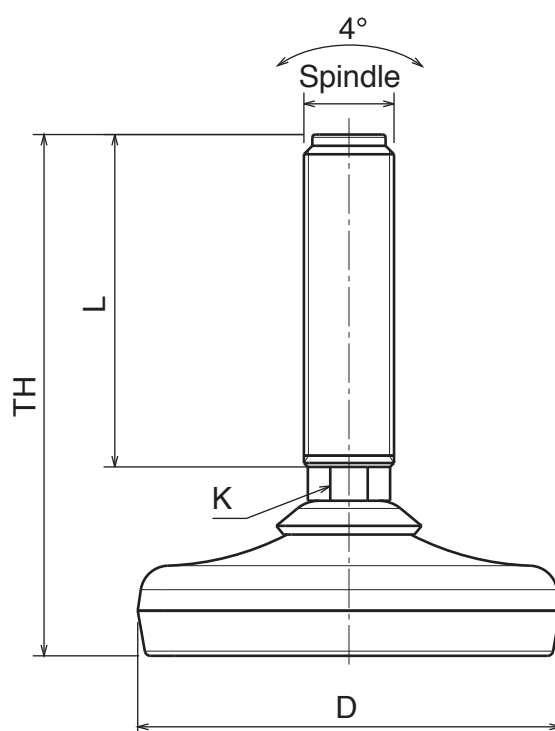

ACCESSORI / ACCESSORIES / ZUBEHÖR


Dadi acciaio inox / Stainless steel nuts / Mutter Edelstahl



Part	Article-Nr.	Spindle
998	99802	M12
998	99804	M16
998	99805	M20
998	99806	M24
998	99807	M30


Piede diam. 50 mm / Leveller diam. 50 mm / Stellfuss Diam. 50 mm

Part	Article-Nr.	D	Spindle	K	TH	L	N
919	91901	50	M12	9	75	50	3.000
919	91902	50	M12	9	100	75	3.000
919	91903	50	M12	9	150	125	3.000
920	92001	50	M16	13	90	65	3.000
920	92002	50	M16	13	140	115	3.000
920	92003	50	M16	13	190	165	3.000
921	92101	50	M20	16	90	65	3.000
921	92102	50	M20	16	115	90	3.000
921	92103	50	M20	16	165	140	3.000




Piede diam. 75 mm / Leveller diam. 75 mm / Stellfuss Diam. 75 mm

Part	Article-Nr.	D	Spindle	K	TH	L	N
922	92201	75	M12	9	80	50	8.000
922	92202	75	M12	9	105	75	8.000
922	92203	75	M12	9	155	125	8.000
923	92301	75	M16	13	95	65	8.000
923	92302	75	M16	13	145	115	8.000
923	92303	75	M16	13	195	165	8.000
924	92401	75	M20	16	95	65	8.000
924	92402	75	M20	16	120	90	8.000
924	92403	75	M20	16	170	140	8.000

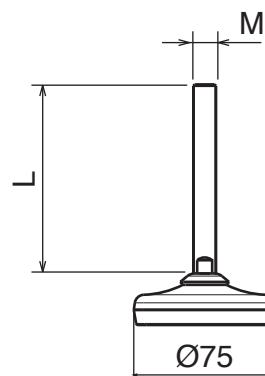


Piede diam. 100 mm / Leveller diam. 100 mm / Stellfuss Diam. 100 mm

Part	Article-Nr.	D	Spindle	K	TH	L	N
925	92501	100	M16	13	100	65	20.000
925	92502	100	M16	13	150	115	20.000
925	92503	100	M16	13	200	165	20.000
926	92601	100	M20	16	125	90	20.000
926	92602	100	M20	16	175	140	20.000
926	92603	100	M20	16	225	190	20.000
927	92701	100	M24	19	125	90	20.000
927	92702	100	M24	19	175	140	20.000
927	92703	100	M24	19	225	190	20.000

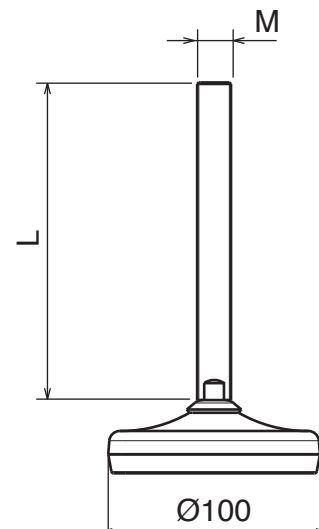

Piede diam. 125 mm / Leveller diam. 125 mm / Stellfuss Diam. 125 mm

Part	Article-Nr.	D	Spindle	K	TH	L	N
928	92801	125	M20	16	130	90	30.000
928	92802	125	M20	16	180	140	30.000
928	92803	125	M20	16	230	190	30.000
929	92901	125	M24	19	130	90	30.000
929	92902	125	M24	19	180	140	30.000
929	92903	125	M24	19	230	190	30.000
930	93001	125	M30	24	155	115	30.000
930	93002	125	M30	24	205	165	30.000
930	93003	125	M30	24	255	215	30.000

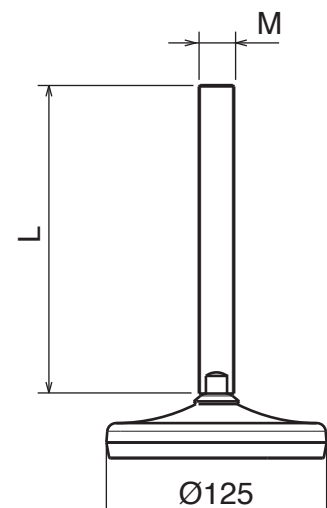


934-939

EASY CLEAN


Piede con Foro Fissaggio
Leveller with Fixing Hole
 Stellfuss mit Befestigungsbohrung

Materiale:	Material:	Materialien:
Basi, stelo e rondella: Acciaio inox	Base plate, spindle and washer: Stainless steel	Fussplatte, Spindel und Scheibe: Edelstahl

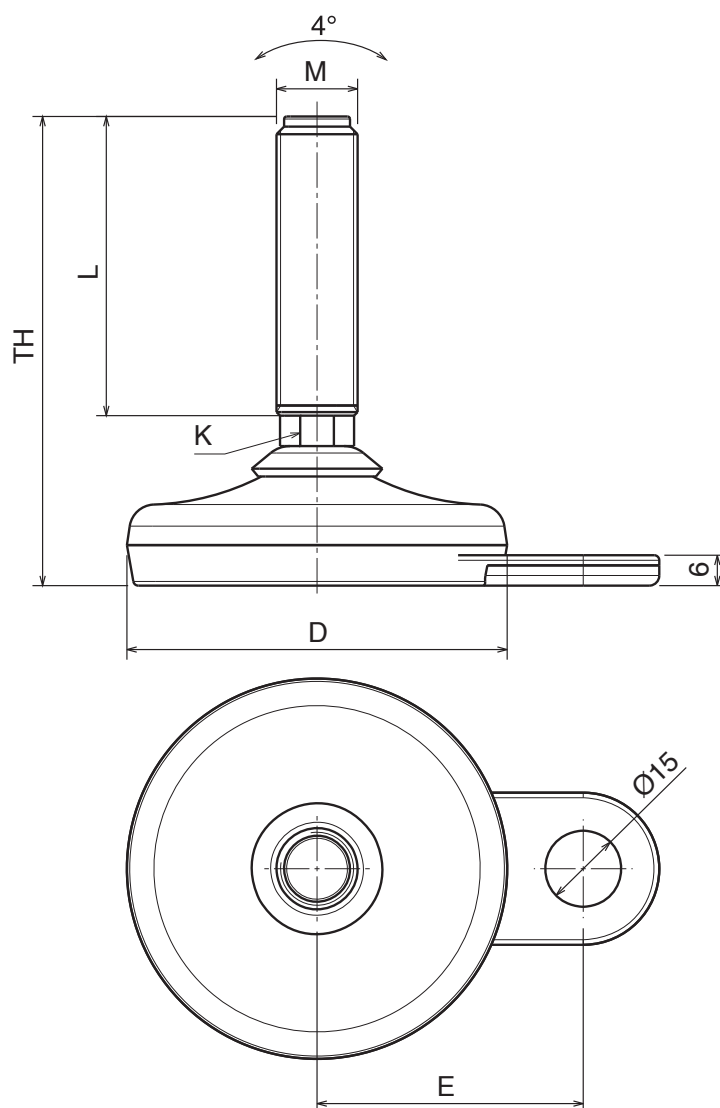


Piede diam. 75 mm con fori fissaggio / Leveller diam. 75 mm with fixing holes
 Stellfuss diam. 75 mm mit Befestigungsbohrung

Part	Article-Nr.	D	E	Spindle	K	TH	L	N
934	93401	75	52,5	M12	9	80	50	8.000
934	93402	75	52,5	M12	9	105	75	8.000
934	93403	75	52,5	M12	9	155	125	8.000
935	93501	75	52,5	M16	13	95	65	8.000
935	93502	75	52,5	M16	13	145	115	8.000
935	93503	75	52,5	M16	13	195	165	8.000
936	93601	75	52,5	M20	16	95	65	8.000
936	93602	75	52,5	M20	16	120	90	8.000
936	93603	75	52,5	M20	16	170	140	8.000

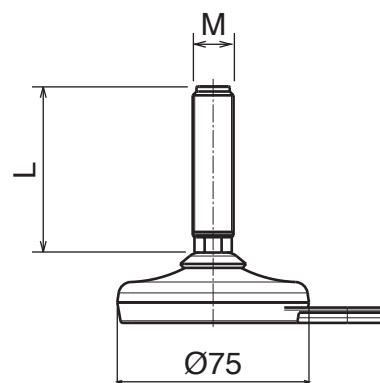

Piede diam. 100 mm con fori fissaggio / Leveller diam. 100 mm with fixing holes
 Stellfuss diam. 100 mm mit Befestigungsbohrung

Part	Article-Nr.	D	E	Spindle	K	TH	L	N
937	93701	100	65	M16	13	100	65	20.000
937	93702	100	65	M16	13	150	115	20.000
937	93703	100	65	M16	13	200	165	20.000
938	93801	100	65	M20	16	125	90	20.000
938	93802	100	65	M20	16	175	140	20.000
938	93803	100	65	M20	16	225	190	20.000
939	93901	100	65	M24	19	125	90	20.000
939	93902	100	65	M24	19	175	140	20.000
939	93903	100	65	M24	19	225	190	20.000

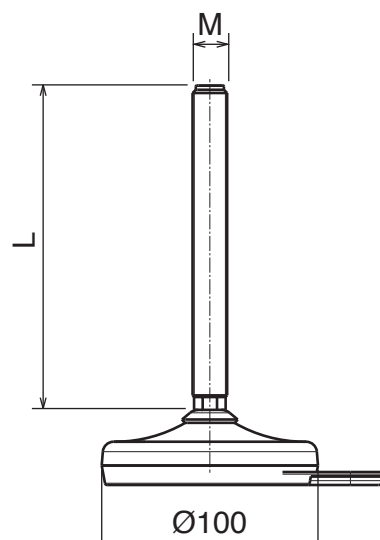

ACCESSORI / ACCESSORIES / ZUBEHÖR

Dadi acciaio inox / Stainless steel nuts / Mutter Edelstahl




Part	Article-Nr.	Spindle
998	99802	M12
998	99804	M16
998	99805	M20
998	99806	M24

Materiale:	Material:	Materialien:
Acciaio inox o Ferro zincato	Stainless steel or Zinc plated steel	Edelstahl oder Stahl Verzinkt



Ø123

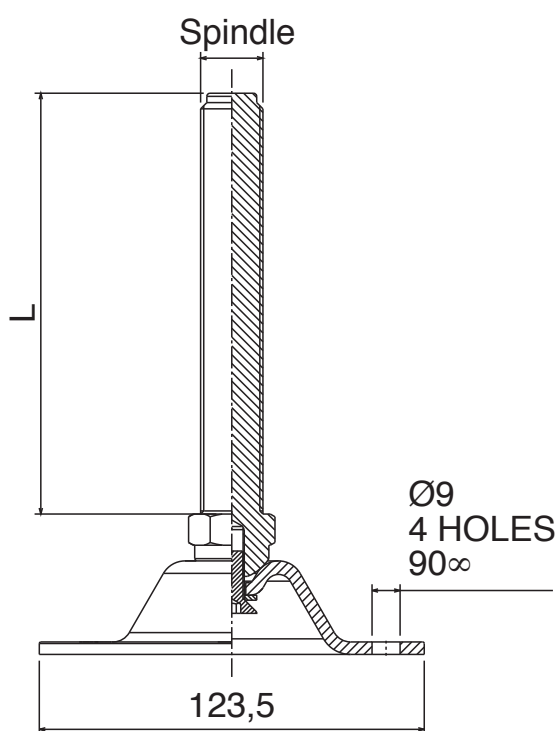

ACCESSORI / ACCESSORIES / ZUBEHÖR

Dadi acciaio inox / Stainless steel nuts / Mutter Edelstahl




Part	Article-Nr.	Spindle
998	99804	M16
998	99805	M20
998	99806	M24
998	99807	M30

Piede diam. 123 mm con 4 fori 90° / Leveller diam. 123 mm with 4 holes 90°
Stellfuss diam. 123 mm mit 4 Befestigungsbohrung 90°

Spindle material							
Part	Art.-Nr. SS	Art.-Nr. FeZn	Spindle	K	TH	L	N
960	P96001H	P96001ZH	M16	20	155	115	10.000
960	P96002H	P96002ZH	M16	20	175	135	10.000
961	P96101H	P96101ZH	M20	24	155	115	10.000
961	P96102H	P96102ZH	M20	24	175	135	10.000
962	P96201H	P96201ZH	M24	24	170	125	10.000
962	P96202H	P96202ZH	M24	24	230	185	10.000
963	P96301H	P96301ZH	M30	30	170	125	10.000
963	P96302H	P96302ZH	M30	30	230	185	10.000

SS: Acciaio inox / Stainless steel / Edelstahl

FeZn: Ferro zincato / Zinc plated steel / Stahl Verzinkt

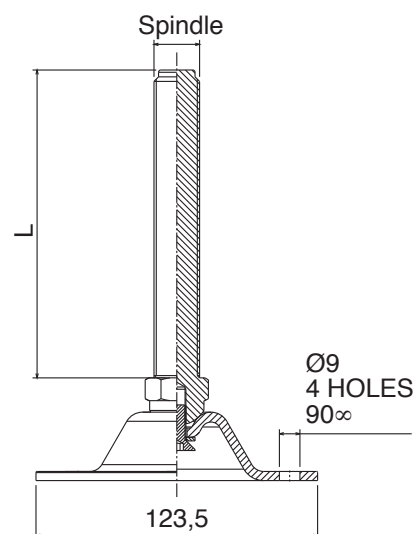


Piede diam. 123 mm con 2 fori 180° / Leveller diam. 123 mm with 2 holes 180°
Stellfuss diam. 123 mm mit 2 Befestigungsbohrung 180°

Spindle material							
Part	Art.-Nr. SS	Art.-Nr. FeZn	Spindle	K	TH	L	N
964	P96401H	P96401ZH	M16	20	155	115	10.000
964	P96402H	P96402ZH	M16	20	175	135	10.000
965	P96501H	P96501ZH	M20	24	155	115	10.000
965	P96502H	P96502ZH	M20	24	175	135	10.000
966	P96601H	P96601ZH	M24	24	170	125	10.000
966	P96602H	P96602ZH	M24	24	230	185	10.000
967	P96701H	P96701ZH	M30	30	170	125	10.000
967	P96702H	P96702ZH	M30	30	230	185	10.000

SS: Acciaio inox / Stainless steel / Edelstahl

FeZn: Ferro zincato / Zinc plated steel / Stahl Verzinkt

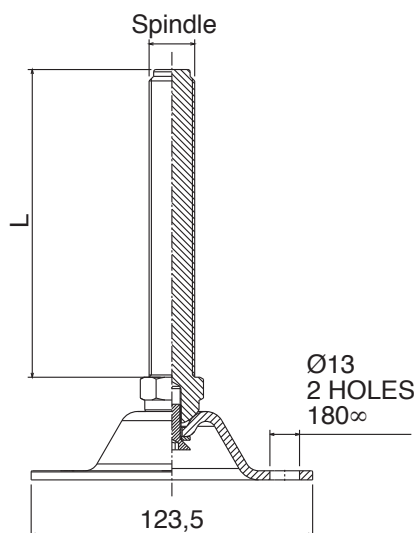


Piede diam. 123 mm senza fori / Leveller diam. 123 mm without holes
Stellfuss diam. 123 mm ohne Befestigungsbohrung

Spindle material							
Part	Art.-Nr. SS	Art.-Nr. FeZn	Spindle	K	TH	L	N
968	P96801H	P96801ZH	M16	20	155	115	10.000
968	P96802H	P96802ZH	M16	20	175	135	10.000
969	P96901H	P96901ZH	M20	24	155	115	10.000
969	P96902H	P96902ZH	M20	24	175	135	10.000
970	P97001H	P97001ZH	M24	24	170	125	10.000
970	P97002H	P97002ZH	M24	24	230	185	10.000
971	P97101H	P97101ZH	M30	30	170	125	10.000
971	P97102H	P97102ZH	M30	30	230	185	10.000

SS: Acciaio inox / Stainless steel / Edelstahl

FeZn: Ferro zincato / Zinc plated steel / Stahl Verzinkt

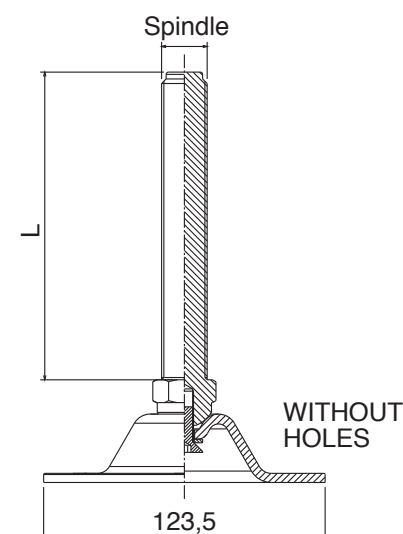



www.moveexii.com

CHEMICAL RESISTANCES

Chemical Agent up to 65°C	Polyamide	Steel	Stainless Steel Aisi 304	Stainless Steel Aisi 430	<i>LF</i>	<i>MK</i>	<i>MX</i>	UHMW PE	PP
Acetone	G	U	G	G	G	G	A	G	G
Acetic acid (max. 5%)	U	U	G	U	U	U	G	G	G
Alcohol	G	G	G	G	G	G	G	G	G
Ammonia	G	A	G	G	U	U	A	G	G
Beer	G	G	G	G	G	G	G	G	G
Benzene	G	G	G	G	G	G	U	A	G
Benzol	G	G	G	G	G	G	G	G	A
Carbon tetrachloride	G	A	A	A	G	G	/	A	U
Chocolat	A	G	G	G	G	G	G	A	G
Citric acid	A	U	G	A	A	A	G	G	G
Formic acid	U	G	G	G	G	G	A	G	\
Fresh water	G	U	G	G	G	G	G	G	G
Fruit juices	G	U	G	A	G	G	G	G	G
Hydrochloric acid (max.2%)	U	U	U	U	U	U	A	A	G
Hydrogen peroxide	U	U	G	A	U	U	/	A	\
Iodine	U	A	A	A	A	A	/	A	\
Lactic acid	G	U	G	U	G	G	G	G	G
Milk	G	G	G	G	G	G	G	G	G
Mustard	A	G	G	G	A	A	/	A	G
Nitric acid	U	U	G	A	U	U	U	A	G
Oil (vegetable or mineral)	G	G	G	G	G	G	U	G	G
Paraffin	G	G	G	G	G	G	G	G	\
Petrol	G	G	G	G	G	G	G	A	G
Phosphoric acid (max10%)	U	U	G	U	U	U	U	G	G
Sea water	U	A	G	A	G	G	G	G	G
Soap and water	G	A	G	G	G	G	G	G	G
Sodium hydrochloride	G	U	A	U	G	G	A	G	G
Sodium hydroxide (max.25%)	G	U	G	G	U	U	U	G	\
Sodium hypochlorite	G	U	U	U	U	U	A	G	G
Soft Drinks	G	G	G	G	G	G	G	G	G
Spirits	G	G	G	G	G	G	G	G	G
Sulphide acid	U	U	U	U	U	U	G	U	G
Toluene	U	U	U	U	G	G	G	A	G
Turpentine	U	G	G	G	U	U	G	A	\
Vegetable juices	G	A	G	G	G	G	G	G	G
Vinegar	G	U	A	U	G	G	G	G	G
Whisky	G	G	G	G	G	G	G	G	G
Wine	G	G	G	G	G	G	G	G	G
Xilol	U	U	U	U	U	U	G	U	U

G=good

A=average

U=unsatisfactory

Index

10010102	8	10160107	11	11080109	17	11401	119	1348020090A	91
10010103	8	10180107	12	11090107	18	11402	119	1348020093A	91
10010104	8	10201	108	11090108	18	11501	120	1348020096A	91
10010105	8	10202	108	11090109	18	11502	120	1348020099A	91
10010106	8	10301	108	11100102	20	11510103	92	1348020102A	91
10010107	8	10302	108	11100103	20	11520103	92	1348020105A	91
10010202	8	10401	108	11100105	20	11601	120	1348020108A	91
10010203	8	10402	108	11101	110	11602	120	1348020111A	91
10010204	8	10501	109	11102	110	11701	118	1348020114A	91
10010205	8	10502	109	11110102	20	11702	118	1348020117A	91
10010206	8	10503	109	11110103	20	11801	110	1348020120A	91
10010207	8	10504	109	11110105	20	11901	112	13501	118
10010302	8	10505	109	11120102	21	11901S	112	13601	118
10010303	8	10506	109	11120103	21	11901Z	112	13701	118
10030107	8	10507	109	11120105	21	11902	112	14101	114
10030207	8	10508	109	11130107	21	11902S	112	14101Z	114
10050107	9	10601	109	11130108	21	11902Z	112	14102	114
10070100	9	10602	109	11130109	21	12001	112	14102Z	114
10070101	9	10701	109	11140105	23	12001Z	112	14201	114
10070108	9	10702	109	11140107	23	12002	112	14201Z	114
10070109	9	10801	109	11140108	23	12002Z	112	14202	114
10080102	10	10802	109	11140109	23	12101	112	14202Z	114
10080103	10	10901	110	11150107	22	12101Z	112	14301	114
10080105	10	10902	110	11150108	22	12102	112	14301Z	114
10080107	10	11001	110	11150109	22	12102Z	112	14302	114
10080202	10	11002	110	11160107	23	12201	113	14302Z	114
10080203	10	11010102	14	11160108	23	12201Z	113	14401	115
10080205	10	11010103	14	11160109	23	12202	113	14401Z	115
10080207	10	11010104	14	11170107	22	12202Z	113	14402	115
10080302	10	11010105	14	11170108	22	12301	113	14402Z	115
10080303	10	11010106	14	11170109	22	12301Z	113	14503	115
10100102	10	11010107	14	11180107	24	12302	113	14701	111
10100105	10	11010114	14	11180108	24	12302Z	113	14801	111
10100107	10	11020102	14	11180109	24	12401	113	150101	94
10100202	10	11020103	14	11190102	18	12401Z	113	150102	94
10101	108	11030102	15	11190105	18	12402	113	150103	94
10102	108	11030105	15	11200102	25	12402Z	113	150104	94
10120102	10	11030107	15	11200202	25	13001	116	150106	94
10120105	10	11040107	15	11200302	25	13101	116	150107	94
10120107	10	11040108	15	11201	111	13301	111	150108	94
10140102	11	11040109	15	11202	111	13302	111	150150	94
10140103	11	11050107	16	11210102	25	13401	118	150151	94
10140104	11	11050108	16	11210202	25	1348020060A	91	150152	94
10140105	11	11050109	16	11210302	25	1348020063A	91	150153	94
10140107	11	11060107	16	11220400	26	1348020066A	91	150154	94
10140202	11	11060108	16	11230400	26	1348020069A	91	150201	94
10140203	11	11060109	16	11240102	19	1348020072A	91	150202	94
10140205	11	11070107	17	11240105	19	1348020075A	91	150203	94
10140207	11	11070108	17	11250102	19	1348020078A	91	150204	94
10160102	11	11070109	17	11250105	19	1348020081A	91	150206	94
10160104	11	11080107	17	11301	119	1348020084A	91	150207	94
10160105	11	11080108	17	11302	119	1348020087A	91	150208	94

150250	94	151104	97	152251	98	152806	99	153554	101
150251	94	151106	97	152252	98	152807	99	153601	101
150252	94	151107	97	152253	98	152808	99	153602	101
150253	94	151108	97	152254	98	152851	99	153603	101
150254	94	151150	97	152301	98	152852	99	153604	101
150301	94	151151	97	152302	98	152853	99	153606	101
150302	94	151152	97	152303	98	152854	99	153607	101
150303	94	151153	97	152304	98	153101	100	153608	101
150304	94	151154	97	152306	98	153102	100	153651	101
150306	94	151201	97	152307	98	153103	100	153652	101
150307	94	151202	97	152308	98	153104	100	153653	101
150308	94	151203	97	152350	98	153106	100	153654	101
150350	94	151204	97	152351	98	153107	100	153701	101
150351	94	151206	97	152352	98	153108	100	153702	101
150352	94	151207	97	152353	98	153150	100	153703	101
150353	94	151208	97	152354	98	153151	100	153704	101
150354	94	151250	97	152401	98	153152	100	153706	101
150401	94	151251	97	152402	98	153153	100	153707	101
150402	94	151252	97	152403	98	153154	100	153708	101
150403	94	151253	97	152404	98	153201	100	153751	101
150404	94	151254	97	152406	98	153202	100	153752	101
150406	94	151301	97	152407	98	153203	100	153753	101
150407	94	151302	97	152408	98	153204	100	153754	101
150408	94	151303	97	152450	98	153206	100	153801	101
150450	94	151304	97	152451	98	153207	100	153802	101
150451	94	151306	97	152452	98	153208	100	153803	101
150452	94	151307	97	152453	98	153250	100	153804	101
150453	94	151308	97	152454	98	153251	100	153806	101
150454	94	151350	97	152501	99	153252	100	153807	101
150501	95	151351	97	152502	99	153253	100	153808	101
150502	95	151352	97	152503	99	153254	100	153851	101
150503	95	151353	97	152504	99	153301	100	153852	101
150504	95	151354	97	152506	99	153302	100	153853	101
150506	95	151401	97	152507	99	153303	100	153854	101
150507	95	151402	97	152508	99	153304	100	154101	102
150508	95	151403	97	152551	99	153306	100	154102	102
150551	95	151404	97	152552	99	153307	100	154103	102
150552	95	151406	97	152553	99	153308	100	154104	102
150553	95	151407	97	152554	99	153350	100	154150	102
150554	95	151408	97	152601	99	153351	100	154151	102
150601	95	151450	97	152602	99	153352	100	154152	102
150602	95	151451	97	152603	99	153353	100	154153	102
150603	95	151452	97	152604	99	153354	100	154154	102
150604	95	151453	97	152606	99	153401	100	154201	102
150606	95	151454	97	152607	99	153402	100	154202	102
150607	95	152101	98	152608	99	153403	100	154203	102
150608	95	152102	98	152651	99	153404	100	154204	102
150651	95	152103	98	152652	99	153406	100	154250	102
150652	95	152104	98	152653	99	153407	100	154251	102
150653	95	152106	98	152654	99	153408	100	154252	102
150654	95	152107	98	152701	99	153450	100	154253	102
150701	95	152108	98	152702	99	153451	100	154254	102
150702	95	152150	98	152703	99	153452	100	154301	102
150703	95	152151	98	152704	99	153453	100	154302	102
150704	95	152152	98	152706	99	153454	100	154303	102
150706	95	152153	98	152707	99	153501	101	154304	102
150707	95	152154	98	152708	99	153502	101	154350	102
150708	95	152201	98	152751	99	153503	101	154351	102
150751	95	152202	98	152752	99	153504	101	154352	102
150752	95	152203	98	152753	99	153506	101	154353	102
150753	95	152204	98	152754	99	153507	101	154354	102
150754	95	152206	98	152801	99	153508	101	154501	103
151101	97	152207	98	152802	99	153551	101	154502	103
151102	97	152208	98	152803	99	153552	101	154503	103
151103	97	152250	98	152804	99	153553	101	154504	103

154506	103	156350	96	22202	124	31302	137	34852	148
154507	103	156351	96	22203	124	31311	137	34901	147,
154508	103	156352	96	22301	125	31312	137	149	
154551	103	156353	96	22302	125	31401	137	34902	147
154552	103	156354	96	22303	125	31402	137	34903	147
154553	103	156401	96	22401	124	31409	137	35001	147
154554	103	156402	96	22402	124	31410	137	35002	147
154601	103	156403	96	22403	124	31411	137	35003	147
154602	103	156404	96	22501	125	31412	137	35101	147
154603	103	156406	96	22502	125	31419	137	35102	147
154604	103	156407	96	22503	125	31420	137	35103	147
154606	103	156408	96	22601	124	31501	138	35151	147
154607	103	156450	96	22602	124	31502	138	35152	147
154608	103	156451	96	22603	124	31601	138	35153	147
154651	103	156452	96	22701	125	31602	138	35201	147
154652	103	156453	96	22702	125	31701	139	35202	147
154653	103	156454	96	22703	125	31798	139	35203	147
154654	103	20101	122	22801	82	31799	139	35251	147
154701	103	20102	122	22802	82	31801	139	35252	147
154702	103	20103	122	22803	82	31901	140	35253	147
154703	103	20201	122	30101	131	32001	140	35301	155
154704	103	20202	122	30102	131	32002	140	35302	155
154706	103	20203	122	30103	131	32101	141	35303	155
154707	103	20301	123	30104	131	32201	141	35401	155
154708	103	20302	123	30201	131	32301	141	35402	155
154751	103	20303	123	30202	131	32401	142	35403	155
154752	103	20401	123	30203	131	32501	142	35501	155
154753	103	20402	123	30204	131	32601	142	35502	155
154754	103	20403	123	30501	132	32701	142	35503	155
155104	105	20701	126	30502	132	32702	142	35601	149
155309	105	20702	126	30503	132	32703	142	35602	149
155310	105	20703	126	30504	132	32801	143	35603	149
155908	105	20704	126	30601	132	328811	143	35701	149
155909	105	20705	126	30602	132	32901	143	35702	149
156101	96	20706	126	30603	132	32902	143	35703	149
156102	96	20707	126	30604	132	32903	143	35800	154
156103	96	20708	126	30701	133	33001	143	35802	150
156104	96	20709	126	30702	133	33002	143	35804	150
156106	96	21301	126	30703	133	33003	143	35900	154
156107	96	21302	126	30704	133	33004	143	35902	150
156108	96	21303	126	30709	133	33101	145	35904	150
156150	96	21501	127	30710	133	33102	145	36000	154
156151	96	21502	127	30801	133	33103	145	36002	151
156152	96	21503	127	30802	133	33301	154	36004	151
156153	96	21504	127	30803	133	33701	146	36100	154
156154	96	21505	127	30804	133	33702	146	36102	151
156201	96	21506	127	30901	134	33801	146	36104	151
156202	96	21507	127	30902	134	33802	146	36201	154
156203	96	21508	127	30903	134	33901	146	36202	154
156204	96	21701	127	30904	134	33902	146	36203	154
156206	96	21702	127	31001	134	33903	146	36301	156
156207	96	21703	127	31002	134	34501	145	36302	156
156208	96	21704	127	31003	134	34502	145	36303	156
156250	96	21705	127	31004	134	34503	145,	36304	156
156251	96	21901	122	31101	135	148		36401	150
156252	96	21902	122	31102	135	34553	148	36411	150
156253	96	21903	122	31103	135	34701	148	36421	153
156254	96	22001	123	31104	135	34702	148	36422	153
156301	96	22002	123	31109	135	34703	148	36501	150
156302	96	22003	123	31110	135	34751	148	36511	150
156303	96	22101	127	31201	135	34752	148	36521	153
156304	96	22102	127	31202	135	34753	148	36522	153
156306	96	22103	127	31203	135	34801	148	36601	151
156307	96	22104	127	31204	135	34802	148	36611	151
156308	96	22201	124	31301	137	34851	148	36621	152

36622	152	39402	144	41525	180	41590	180	41662	181
36701	151	39501	154	41526	180	41591	180	41663	181
36711	151	39601	157	41527	180	41592	180	41664	181
36721	152	39602	157	41528	180	41593	180	41665	181
36722	152	39701	162	41529	180	41601	181	41666	181
36801	158	39702	162	41530	180	41602	181	41667	181
36801SS	158	39703	162	41531	180	41603	181	41668	181
36802	158	39860	136	41532	180	41604	181	41669	181
36802SS	158	39861	136	41533	180	41605	181	41670	181
36803	158	39870	136	41534	180	41606	181	41671	181
36803SS	158	39871	136	41535	180	41607	181	41672	181
36901	158	40101	172	41536	180	41608	181	41673	181
36901SS	158	40102	172	41537	180	41609	181	41674	181
36902	158	40105	172	41538	180	41610	181	41675	181
36902SS	158	40201	172	41539	180	41611	181	41676	181
36903	158	40202	172	41540	180	41612	181	41677	181
36903SS	158	40203	172	41541	180	41613	181	41678	181
37001	159	40204	172	41542	180	41614	181	41679	181
37002	159	40205	172	41543	180	41615	181	41680	181
37003	159	40206	172	41544	180	41616	181	41681	181
37101	159	40301	173	41545	180	41617	181	41682	181
37102	159	40302	173	41546	180	41618	181	41683	181
37103	159	40303	173	41547	180	41619	181	41684	181
37201	160	40304	173	41548	180	41620	181	41685	181
37202	160	40305	173	41549	180	41621	181	41686	181
37203	160	40306	173	41550	180	41622	181	41687	181
37301	160	40401	173	41551	180	41623	181	41688	181
37302	160	40402	173	41552	180	41624	181	41689	181
37401	163	40405	173	41553	180	41625	181	41690	181
37402	163	40701	174	41554	180	41626	181	41701	177
37501	163	40702	174	41555	180	41627	181	41702	177
37502	163	40801	174	41556	180	41628	181	41801	183
37701	164	41001	175	41557	180	41629	181	41802	183
37702	164	41002	175	41558	180	41630	181	41803	183
37703	164	41101	175	41559	180	41631	181	41804	183
37801	164	41102	175	41560	180	41632	181	41805	183
37802	164	41301	177	41561	180	41633	181	41806	183
37803	164	41302	177	41562	180	41634	181	41807	183
37901	165	41303	177	41563	180	41635	181	41808	183
37902	165	41401	178	41564	180	41636	181	41901	179
37903	165	41402	178	41565	180	41637	181	41902	179
38001	165	41501	180	41566	180	41638	181	41903	179
38002	165	41502	180	41567	180	41639	181	41904	179
38003	165	41503	180	41568	180	41640	181	41905	179
38101	166	41504	180	41569	180	41641	181	41906	179
38102	166	41505	180	41570	180	41642	181	41913	179
38103	166	41506	180	41571	180	41643	181	41914	179
38104	166	41507	180	41572	180	41644	181	41915	179
38201	166	41508	180	41573	180	41645	181	41916	179
38202	166	41509	180	41574	180	41646	181	42001	179
38203	166	41510	180	41575	180	41647	181	42002	179
38301	161	41511	180	41576	180	41648	181	42003	179
38302	161	41512	180	41577	180	41649	181	42004	179
38401	161	41513	180	41578	180	41650	181	42005	179
38402	161	41514	180	41579	180	41651	181	42006	179
38501	162	41515	180	41580	180	41652	181	42015	179
38601	162	41516	180	41581	180	41653	181	42016	179
38602	162	41517	180	41582	180	41654	181	42101	184
38901	91	41518	180	41583	180	41655	181	42102	184
38902	91	41519	180	41584	180	41656	181	42103	184
39001	143	41520	180	41585	180	41657	181	42104	184
39201	144	41521	180	41586	180	41658	181	42105	184
39202	144	41522	180	41587	180	41659	181	42106	184
39203	144	41523	180	41588	180	41660	181	42201	184
39401	144	41524	180	41589	180	41661	181	42202	184

42301	184	50502G	43	51250	32	51954	33	5202010255A	79
42401	184	50503	30	51251	32	52001	33	5202010255B	79
42501	176	50503G	43	51252	32	52002	33	5202010255C	79
42601	176	50504	30	51253	32	52003	33	5202010340A	79
42701	176	50504G	43	51254	32	52004	33	5202010340B	79
42702	176	50550	30	51301	32	5201010085A	78	5202010340C	79
42801	182	50551	30	51302	32	5201010085B	78	5202010425A	79
42802	182	50552	30	51303	32	5201010085C	78	5202010425B	79
42803	182	50553	30	51304	32	5201010170A	78	5202010425C	79
42804	182	50554	30	51350	32	5201010170B	78	5202010510A	79
42805	182	50601	30	51351	32	5201010170C	78	5202010510B	79
42806	182	50602	30	51352	32	5201010255A	78	5202010510C	79
42807	182	50603	30	51353	32	5201010255B	78	5202010595A	79
42808	182	50604	30	51354	32	5201010255C	78	5202010595B	79
42901	182	50650	30	51401	32	5201010340A	78	5202010595C	79
42902	182	50651	30	51402	32	5201010340B	78	5202010680A	79
43001	182	50652	30	51403	32	5201010340C	78	5202010680B	79
43002	182	50653	30	51404	32	5201010425A	78	5202010680C	79
50101	30	50654	30	51450	32	5201010425B	78	5202010765A	79
50102	30	50701	30	51451	32	5201010425C	78	5202010765B	79
50103	30	50702	30	51452	32	5201010510A	78	5202010765C	79
50104	30	50703	30	51453	32	5201010510B	78	5202010850A	79
50150	30	50704	30	51454	32	5201010510C	78	5202010850B	79
50151	30	50750	30	51501	32	5201010595A	78	5202010850C	79
50152	30	50751	30	51502	32	5201010595B	78	5202010935A	79
50153	30	50752	30	51503	32	5201010595C	78	5202010935B	79
50154	30	50753	30	51504	32	5201010680A	78	5202010935C	79
50201	30	50754	30	51550	32	5201010680B	78	5202011020A	79
50202	30	50801	31	51551	32	5201010680C	78	5202011020B	79
50203	30	50802	31	51552	32	5201010765A	78	5202011020C	79
50204	30	50803	31	51553	32	5201010765B	78	5202011105A	79
50250	30	50804	31	51554	32	5201010765C	78	5202011105B	79
50251	30	50851	31	51601	32	5201010850A	78	5202011105C	79
50252	30	50852	31	51602	32	5201010850B	78	5202011190A	79
50253	30	50853	31	51603	32	5201010850C	78	5202011190B	79
50254	30	50854	31	51604	32	5201010935A	78	5202011190C	79
50301	30	50901	31	51650	32	5201010935B	78	5202011275A	79
50301G	43	50902	31	51651	32	5201010935C	78	5202011275B	79
50302	30	50903	31	51652	32	5201011020A	78	5202011275C	79
50302G	43	50904	31	51653	32	5201011020B	78	5202011360A	79
50303	30	50951	31	51654	32	5201011020C	78	5202011360B	79
50303G	43	50952	31	51701	32	5201011105A	78	5202011360C	79
50304	30	50953	31	51702	32	5201011105B	78	5202011445A	79
50304G	43	50954	31	51703	32	5201011105C	78	5202011445B	79
50350	30	51001	31	51704	32	5201011190A	78	5202011445C	79
50351	30	51002	31	51750	32	5201011190B	78	5202011530A	79
50352	30	51003	31	51751	32	5201011190C	78	5202011530B	79
50353	30	51004	31	51752	32	5201011275A	78	5202011530C	79
50354	30	51051	31	51753	32	5201011275B	78	5203010085A	80
50401	30	51052	31	51754	32	5201011275C	78	5203010085B	80
50401G	43	51053	31	51801	33	5201011360A	78	5203010085C	80
50402	30	51054	31	51802	33	5201011360B	78	5203010170A	80
50402G	43	51101	32	51803	33	5201011360C	78	5203010170B	80
50403	30	51102	32	51804	33	5201011445A	78	5203010170C	80
50403G	43	51103	32	51851	33	5201011445B	78	5203010255A	80
50404	30	51104	32	51852	33	5201011445C	78	5203010255B	80
50404G	43	51150	32	51853	33	5201011530A	78	5203010255C	80
50450	30	51151	32	51854	33	5201011530B	78	5203010340A	80
50451	30	51152	32	51901	33	5201011530C	78	5203010340B	80
50452	30	51153	32	51902	33	5202010085A	79	5203010340C	80
50453	30	51154	32	51903	33	5202010085B	79	5203010425A	80
50454	30	51201	32	51904	33	5202010085C	79	5203010425B	80
50501	30	51202	32	51951	33	5202010170A	79	5203010425C	80
50501G	43	51203	32	51952	33	5202010170B	79	5203010510A	80
50502	30	51204	32	51953	33	5202010170C	79	5203010510B	80

5203010510C	80	5204010850B	81	5221010680B	85	5222010935B	86	5231010850C	87
5203010595A	80	5204010850C	81	5221010680C	85	5222010935C	86	5231010935A	87
5203010595B	80	5204010935A	81	5221010765A	85	5222011020A	86	5231010935B	87
5203010595C	80	5204010935B	81	5221010765B	85	5222011020B	86	5231010935C	87
5203010680A	80	5204010935C	81	5221010765C	85	5222011020C	86	5231011020A	87
5203010680B	80	5204011020A	81	5221010850A	85	5222011105A	86	5231011020B	87
5203010680C	80	5204011020B	81	5221010850B	85	5222011105B	86	5231011020C	87
5203010765A	80	5204011020C	81	5221010850C	85	5222011105C	86	5231011105A	87
5203010765B	80	5204011105A	81	5221010935A	85	5222011190A	86	5231011105B	87
5203010765C	80	5204011105B	81	5221010935B	85	5222011190B	86	5231011105C	87
5203010850A	80	5204011105C	81	5221010935C	85	5222011190C	86	5231011190A	87
5203010850B	80	5204011190A	81	5221011020A	85	5222011275A	86	5231011190B	87
5203010850C	80	5204011190B	81	5221011020B	85	5222011275B	86	5231011190C	87
5203010935A	80	5204011190C	81	5221011020C	85	5222011275C	86	5231011275A	87
5203010935B	80	5204011275A	81	5221011105A	85	5222011360A	86	5231011275B	87
5203010935C	80	5204011275B	81	5221011105B	85	5222011360B	86	5231011275C	87
5203011020A	80	5204011275C	81	5221011105C	85	5222011360C	86	5231011360A	87
5203011020B	80	5204011360A	81	5221011190A	85	5222011445A	86	5231011360B	87
5203011020C	80	5204011360B	81	5221011190B	85	5222011445B	86	5231011360C	87
5203011105A	80	5204011360C	81	5221011190C	85	5222011445C	86	5231011445A	87
5203011105B	80	5204011445A	81	5221011275A	85	5222011530A	86	5231011445B	87
5203011105C	80	5204011445B	81	5221011275B	85	5222011530B	86	5231011445C	87
5203011190A	80	5204011445C	81	5221011275C	85	5222011530C	86	5231011530A	87
5203011190B	80	5204011530A	81	5221011360A	85	52250	34	5231011530B	87
5203011190C	80	5204011530B	81	5221011360B	85	52251	34	5231011530C	87
5203011275A	80	5204011530C	81	5221011360C	85	52252	34	5233010085A	88
5203011275B	80	52051	33	5221011445A	85	52253	34	5233010085B	88
5203011275C	80	52052	33	5221011445B	85	52254	34	5233010085C	88
5203011360A	80	52053	33	5221011445C	85	52301	34	5233010170A	88
5203011360B	80	52054	33	5221011530A	85	52301G	44	5233010170B	88
5203011360C	80	52101	34	5221011530B	85	52302	34	5233010170C	88
5203011445A	80	52102	34	5221011530C	85	52302G	44	5233010255A	88
5203011445B	80	52103	34	5221019330A	85	52303	34	5233010255B	88
5203011445C	80	52104	34	5221019330C	85	52303G	44	5233010255C	88
5203011530A	80	52150	34	5222010085A	86	52304	34	5233010340A	88
5203011530B	80	52151	34	5222010085B	86	52304G	44	5233010340B	88
5203011530C	80	52152	34	5222010085C	86	5231010085A	87	5233010340C	88
5204010085A	81	52153	34	5222010170A	86	5231010085B	87	5233010425A	88
5204010085B	81	52154	34	5222010170B	86	5231010085C	87	5233010425B	88
5204010085C	81	52201	34	5222010170C	86	5231010170A	87	5233010425C	88
5204010170A	81	52202	34	5222010255A	86	5231010170B	87	5233010510A	88
5204010170B	81	52203	34	5222010255B	86	5231010170C	87	5233010510B	88
5204010170C	81	52204	34	5222010255C	86	5231010255A	87	5233010510C	88
5204010255A	81	5221010085A	85	5222010340A	86	5231010255B	87	5233010595A	88
5204010255B	81	5221010085B	85	5222010340B	86	5231010255C	87	5233010595B	88
5204010255C	81	5221010085C	85	5222010340C	86	5231010340A	87	5233010595C	88
5204010340A	81	5221010170A	85	5222010425A	86	5231010340B	87	5233010680A	88
5204010340B	81	5221010170B	85	5222010425B	86	5231010340C	87	5233010680B	88
5204010340C	81	5221010170C	85	5222010425C	86	5231010425A	87	5233010680C	88
5204010425A	81	5221010255A	85	5222010510A	86	5231010425B	87	5233010765A	88
5204010425B	81	5221010255B	85	5222010510B	86	5231010425C	87	5233010765B	88
5204010425C	81	5221010255C	85	5222010510C	86	5231010510A	87	5233010765C	88
5204010510A	81	5221010340A	85	5222010595A	86	5231010510B	87	5233010850A	88
5204010510B	81	5221010340B	85	5222010595B	86	5231010510C	87	5233010850B	88
5204010510C	81	5221010340C	85	5222010595C	86	5231010595A	87	5233010850C	88
5204010595A	81	5221010425A	85	5222010680A	86	5231010595B	87	5233010935A	88
5204010595B	81	5221010425B	85	5222010680B	86	5231010595C	87	5233010935B	88
5204010595C	81	5221010425C	85	5222010680C	86	5231010680A	87	5233010935C	88
5204010680A	81	5221010510A	85	5222010765A	86	5231010680B	87	5233011020A	88
5204010680B	81	5221010510B	85	5222010765B	86	5231010680C	87	5233011020B	88
5204010680C	81	5221010510C	85	5222010765C	86	5231010765A	87	5233011020C	88
5204010765A	81	5221010595A	85	5222010850A	86	5231010765B	87	5233011105A	88
5204010765B	81	5221010595B	85	5222010850B	86	5231010765C	87	5233011105B	88
5204010765C	81	5221010595C	85	5222010850C	86	5231010850A	87	5233011105C	88
5204010850A	81	5221010680A	85	5222010935A	86	5231010850B	87	5233011190A	88

5233011190B	88	5234011530A	89	52950	35	53152	35	53850	36
5233011190C	88	5234011530B	89	52951	35	53153	35	53851	36
5233011275A	88	5234011530C	89	52952	35	53154	35	53852	36
5233011275B	88	52350	34	52953	35	53201	35	53853	36
5233011275C	88	52351	34	52954	35	53201G	43	53854	36
5233011360A	88	52352	34	53001	35	53202	35	53901	36
5233011360B	88	52353	34	53001G	43	53202G	43	53902	36
5233011360C	88	52354	34	53002	35	53203	35	53903	36
5233011445A	88	52401	34	53002G	43	53203G	43	53904	36
5233011445B	88	52401G	44	53003	35	53204	35	53950	36
5233011445C	88	52402	34	53003G	43	53204G	43	53951	36
5233011530A	88	52402G	44	53004	35	53250	35	53952	36
5233011530B	88	52403	34	53004G	43	53251	35	53953	36
5233011530C	88	52403G	44	5301010003A	84	53252	35	53954	36
5234010085A	89	52404	34	5301010003C	84	53253	35	54001	36
5234010085B	89	52404G	44	5301010006A	84	53254	35	54002	36
5234010085C	89	52450	34	5301010006C	84	53301	35	54003	36
5234010170A	89	52451	34	5301010009A	84	53302	35	54004	36
5234010170B	89	52452	34	5301010009C	84	53303	35	54050	36
5234010170C	89	52453	34	5301010012A	84	53304	35	54051	36
5234010255A	89	52454	34	5301010012C	84	53350	35	54052	36
5234010255B	89	52501	34	5301010015A	84	53351	35	54053	36
5234010255C	89	52501G	44	5301010015C	84	53352	35	54054	36
5234010340A	89	52502	34	5301010018A	84	53353	35	54101	36
5234010340B	89	52502G	44	5301010018C	84	53354	35	54102	36
5234010340C	89	52503	34	5301010021A	84	53401	35	54103	36
5234010425A	89	52503G	44	5301010021C	84	53402	35	54104	36
5234010425B	89	52504	34	5301010024A	84	53403	35	54150	36
5234010425C	89	52504G	44	5301010024C	84	53404	35	54151	36
5234010510A	89	52550	34	5301010027A	84	53450	35	54152	36
5234010510B	89	52551	34	5301010027C	84	53451	35	54153	36
5234010510C	89	52552	34	5301010030A	84	53452	35	54154	36
5234010595A	89	52553	34	5301010030C	84	53453	35	54201	37
5234010595B	89	52554	34	5301010033A	84	53454	35	54202	37
5234010595C	89	52601	34	5301010033C	84	53501	36	54203	37
5234010680A	89	52602	34	5301010036A	84	53502	36	54204	37
5234010680B	89	52603	34	5301010036C	84	53503	36	5421010255A	90
5234010680C	89	52604	34	5301010039A	84	53504	36	5421010255B	90
5234010765A	89	52650	34	5301010039C	84	53550	36	5421010255C	90
5234010765B	89	52651	34	5301010042A	84	53551	36	5421010340A	90
5234010765C	89	52652	34	5301010042C	84	53552	36	5421010340B	90
5234010850A	89	52653	34	5301010045A	84	53553	36	5421010340C	90
5234010850B	89	52654	34	5301010045C	84	53554	36	5421010425A	90
5234010850C	89	52701	34	5301010048A	84	53601	36	5421010425B	90
5234010935A	89	52702	34	5301010048C	84	53602	36	5421010425C	90
5234010935B	89	52703	34	5301010051A	84	53603	36	5421010510A	90
5234010935C	89	52704	34	5301010051C	84	53604	36	5421010510B	90
5234011020A	89	52750	34	5301010054A	84	53650	36	5421010510C	90
5234011020B	89	52751	34	5301010054C	84	53651	36	5421010595A	90
5234011020C	89	52752	34	53050	35	53652	36	5421010595B	90
5234011105A	89	52753	34	53051	35	53653	36	5421010595C	90
5234011105B	89	52754	34	53052	35	53654	36	5421010680A	90
5234011105C	89	52801	35	53053	35	53701	36	5421010680B	90
5234011190A	89	52802	35	53054	35	53702	36	5421010680C	90
5234011190B	89	52803	35	53101	35	53703	36	5421010765A	90
5234011190C	89	52804	35	53101G	43	53704	36	5421010765B	90
5234011275A	89	52850	35	53102	35	53750	36	5421010765C	90
5234011275B	89	52851	35	53102G	43	53751	36	5421010850A	90
5234011275C	89	52852	35	53103	35	53752	36	5421010850B	90
5234011360A	89	52853	35	53103G	43	53753	36	5421010850C	90
5234011360B	89	52854	35	53104	35	53754	36	54251	37
5234011360C	89	52901	35	53104G	43	53801	36	54252	37
5234011445A	89	52902	35	5311019750A	83	53802	36	54253	37
5234011445B	89	52903	35	53150	35	53803	36	54254	37
5234011445C	89	52904	35	53151	35	53804	36	54301	37


54302	37	55053	39	55803	42	60100	46	61403	47
54303	37	55054	39	55804	42	60101	46	61404	47
54304	37	55101	40	55850	42	60102	46	61500	47
54351	37	55102	40	55851	42	60103	46	61501	47
54352	37	55103	40	55852	42	60104	46	61502	47
54353	37	55104	40	55853	42	60200	46	61503	47
54354	37	55150	40	55854	42	60201	46	61504	47
54401	37	55151	40	55901	42	60202	46	61600	47
54402	37	55152	40	55902	42	60203	46	61601	47
54403	37	55153	40	55903	42	60204	46	61602	47
54404	37	55154	40	55904	42	60300	46	61603	47
54451	37	55201	40	55950	42	60301	46	61604	47
54452	37	55202	40	55951	42	60302	46	61700	47
54453	37	55203	40	55952	42	60303	46	61701	47
54454	37	55204	40	55953	42	60304	46	61702	47
54501	38	55250	40	55954	42	60400	46	61703	47
54502	38	55251	40	56001	42	60401	46	61704	47
54503	38	55252	40	56002	42	60402	46	61800	48
54504	38	55253	40	56003	42	60403	46	61801	48
54550	38	55254	40	56004	42	60404	46	61802	48
54551	38	55301	40	56050	42	60500	46	61803	48
54552	38	55302	40	56051	42	60501	46	61804	48
54553	38	55303	40	56052	42	60502	46	61900	48
54554	38	55304	40	56053	42	60503	46	61901	48
54601	38	55350	40	56054	42	60504	46	61902	48
54602	38	55351	40	56101	42	60600	46	61903	48
54603	38	55352	40	56102	42	60601	46	61904	48
54604	38	55353	40	56103	42	60602	46	62000	48
54650	38	55354	40	56104	42	60603	46	62001	48
54651	38	55401	40	56150	42	60604	46	62002	48
54652	38	55402	40	56151	42	60700	46	62003	48
54653	38	55403	40	56152	42	60701	46	62004	48
54654	38	55404	40	56153	42	60702	46	62100	48
54701	38	55450	40	56154	42	60703	46	62101	48
54702	38	55451	40	56201	42	60704	46	62102	48
54703	38	55452	40	56202	42	60801	46	62103	48
54704	38	55453	40	56203	42	60802	46	62104	48
54750	38	55454	40	56204	42	60803	46	62200	48
54751	38	55501	41	56250	42	60804	46	62201	48
54752	38	55502	41	56251	42	60901	46	62202	48
54753	38	55503	41	56252	42	60902	46	62203	48
54754	38	55504	41	56253	42	60903	46	62204	48
54801	38	55551	41	56254	42	60904	46	62300	48
54802	38	55552	41	56301	42	61001	46	62301	48
54803	38	55553	41	56302	42	61002	46	62302	48
54804	38	55554	41	56303	42	61003	46	62303	48
54850	38	55601	41	56304	42	61004	46	62304	48
54851	38	55602	41	56350	42	61100	47	62400	48
54852	38	55603	41	56351	42	61101	47	62401	48
54853	38	55604	41	56352	42	61102	47	62402	48
54854	38	55651	41	56353	42	61103	47	62403	48
54901	39	55652	41	56354	42	61104	47	62404	48
54902	39	55653	41	56401	42	61200	47	62500	47
54903	39	55654	41	56402	42	61201	47	62501	47
54904	39	55701	42	56403	42	61202	47	62502	47
54951	39	55702	42	56404	42	61203	47	62503	47
54952	39	55703	42	56450	42	61204	47	62504	47
54953	39	55704	42	56451	42	61300	47	62600	47
54954	39	55750	42	56452	42	61301	47	62601	47
55001	39	55751	42	56453	42	61302	47	62602	47
55002	39	55752	42	56454	42	61303	47	62603	47
55003	39	55753	42	56550	44	61304	47	62604	47
55004	39	55754	42	56650	44	61400	47	62700	47
55051	39	55801	42	56750	44	61401	47	62701	47
55052	39	55802	42	56850	44	61402	47	62702	47

62703	47	70111460	53	70611660	74	71211174	55	71713624	64
62704	47	70111464	52	70611670	74	71211184	55	71713634	64
62800	47	70111470	53	70611680	74	71211214	55	71713644	64
62801	47	70111474	52	70716610	63	71211224	55	71816614	65
62802	47	70111480	53	70718610	63	71211234	55	71816624	65
62803	47	70111484	52	70719610	63	71211244	55	71816634	65
62804	47	70111510	53	70818610	66	71211254	55	71919614	67
70111110	53	70111514	52	70818620	66	71211264	55	71919624	67
70111114	52	70111520	53	70818630	66	71211274	55	71919634	67
70111120	53	70111524	52	70918610	68	71211284	55	72021612	75
70111124	52	70111530	53	71018610	69	71211314	55	72021622	75
70111130	53	70111534	52	71111114	54	71211324	55	72021632	75
70111134	52	70111540	53	71111124	54	71211334	55	72021642	75
70111140	53	70111544	52	71111134	54	71211344	55	72021652	75
70111144	52	70111550	53	71111144	54	71211354	55	72021662	75
70111150	53	70111554	52	71111154	54	71211364	55	72123612	75
70111154	52	70111560	53	71111164	54	71211374	55	72123622	75
70111160	53	70111564	52	71111174	54	71211384	55	72123632	75
70111164	52	70111570	53	71111184	54	71211414	55	72123642	75
70111170	53	70111574	52	71111214	54	71211424	55	72123652	75
70111174	52	70111580	53	71111224	54	71211434	55	72123662	75
70111180	53	70111584	52	71111234	54	71211444	55	72223612	75
70111184	52	70111610	53	71111244	54	71211454	55	72223622	75
70111210	53	70111614	52	71111254	54	71211464	55	72223632	75
70111214	52	70111620	53	71111264	54	71211474	55	72223642	75
70111220	53	70111624	52	71111274	54	71211484	55	72323612	76
70111224	52	70111630	53	71111284	54	71211514	55	72323622	76
70111230	53	70111634	52	71111314	54	71211524	55	72323632	76
70111234	52	70111640	53	71111324	54	71211534	55	72323642	76
70111240	53	70111644	52	71111334	54	71211544	55	72423612	76
70111244	52	70111650	53	71111344	54	71211554	55	72423622	76
70111250	53	70111654	52	71111354	54	71211564	55	72423632	76
70111254	52	70111660	53	71111364	54	71211574	55	72423642	76
70111260	53	70111664	52	71111374	54	71211584	55	72523612	76
70111264	52	70111670	53	71111384	54	71211614	55	72523622	76
70111270	53	70111674	52	71111414	54	71211624	55	72523632	76
70111274	52	70111680	53	71111424	54	71211634	55	72523642	76
70111280	53	70111684	52	71111434	54	71211644	55	78118610	70
70111284	52	70216614	56	71111444	54	71211654	55	78218610	71
70111310	53	70216624	56	71111454	54	71211664	55	78318610	72
70111314	52	70216634	56	71111464	54	71211674	55	80100	187
70111320	53	70216644	56	71111474	54	71211684	55	80100SS	187
70111324	52	70216654	56	71111484	54	71316614	57	80101	187
70111330	53	70216664	56	71111514	54	71316624	57	80101SS	187
70111334	52	70216674	56	71111524	54	71316634	57	80102	187
70111340	53	70216684	56	71111534	54	71316644	57	80102SS	187
70111344	52	70318615	59	71111544	54	71316654	57	80103	187
70111350	53	70413615	61	71111554	54	71316664	57	80103SS	187
70111354	52	70413625	61	71111564	54	71316674	57	80104	187
70111360	53	70413635	61	71111574	54	71316684	57	80104SS	187
70111364	52	70413645	61	71111584	54	71416614	58	80110	187
70111370	53	70413655	61	71111614	54	71416624	58	80110SS	187
70111374	52	70511610	73	71111624	54	71416634	58	80111	187
70111380	53	70511620	73	71111634	54	71416644	58	80111SS	187
70111384	52	70511630	73	71111644	54	71416654	58	80112	187
70111410	53	70511640	73	71111654	54	71416664	58	80112SS	187
70111414	52	70511650	73	71111664	54	71416674	58	80113	187
70111420	53	70511660	73	71111674	54	71416684	58	80113SS	187
70111424	52	70511670	73	71111684	54	71511615	60	80114	187
70111430	53	70511680	73	71211114	55	71511625	60	80114SS	187
70111434	52	70611610	74	71211124	55	71511635	60	80121	187
70111440	53	70611620	74	71211134	55	71511645	60	80121SS	187
70111444	52	70611630	74	71211144	55	71511655	60	80122	187
70111450	53	70611640	74	71211154	55	71613615	62	80122SS	187
70111454	52	70611650	74	71211164	55	71713614	64	80132	187

80132SS	187	80404	190	80801	193	81501	201	82611	191
80200	187	80404L	190	80802	193	81502	201	82612	191
80201	187	80404SS	190	80803	193	81503	201	82612H	199
80202	187	80410	190	80804	193	81504	201	82704	191
80203	187	80410L	190	80813	193	81700	203	82704H	199
80204	187	80410SS	190	80814	193	81701	203	82710	191
80210	187	80411	190	80901	196	81702	203	82711	191
80211	187	80411L	190	80901L	196	81703	203	82712	191
80212	187	80411SS	190	80901SS	196	81704	203	82712H	199
80213	187	80412	190	80902	196	81900	203	82801	194
80214	187	80412L	190	80902L	196	81901	203	82801SS	194
80221	187	80412SS	190	80902SS	196	81902	203	82802	194
80222	187	80413	190	80903	196	81903	203	82802SS	194
80232	187	80413L	190	80903L	196	81904	203	82804	194
80300	190	80413SS	190	80903SS	196	82100	203	82804SS	194
80300L	190	80414	190	80904	196	82101	203	82901	194
80300SS	190	80414L	190	80904L	196	82102	203	82902	194
80301	190	80414SS	190	80904SS	196	82103	203	82904	194
80301L	190	80421	190	80905L	196	82104	203	83001	197
80301SS	190	80421L	190	80905SS	196	82204	188	83001L	197
80302	190	80421SS	190	80906L	196	82204SS	188	83001SS	197
80302L	190	80422	190	80906SS	196	82210	188	83002	197
80302SS	190	80422L	190	80913	196	82210SS	188	83002H	199
80303	190	80422SS	190	80914	196	82211	188	83002L	197
80303L	190	80432	190	81001	196	82211SS	188	83002LH	199
80303SS	190	80432L	190	81001L	196	82212	188	83002SS	197
80304	190	80432SS	190	81001SS	196	82212SS	188	83004	197
80304L	190	80500	190	81002	196	82304	188	83004H	199
80304SS	190	80501	190	81002L	196	82310	188	83004L	197
80310	190	80502	190	81002SS	196	82311	188	83004LH	199
80310L	190	80503	190	81003	196	82312	188	83004SS	197
80310SS	190	80504	190	81003L	196	82404	191	83101	197
80311	190	80510	190	81003SS	196	82404H	199	83101L	197
80311L	190	80511	190	81004	196	82404L	191	83101SS	197
80311SS	190	80512	190	81004L	196	82404LH	199	83102	197
80312	190	80513	190	81004SS	196	82404SS	191	83102H	199
80312L	190	80514	190	81005L	196	82410	191	83102L	197
80312SS	190	80521	190	81005SS	196	82410L	191	83102LH	199
80313	190	80522	190	81006L	196	82410SS	191	83102SS	197
80313L	190	80532	190	81006SS	196	82411	191	83104	197
80313SS	190	80600	190	81013	196	82411L	191	83104H	199
80314	190	80601	190	81014	196	82411SS	191	83104L	197
80314L	190	80602	190	81101	196	82412	191	83104LH	199
80314SS	190	80603	190	81102	196	82412H	199	83104SS	197
80321	190	80604	190	81103	196	82412L	191	83201	197
80321L	190	80610	190	81104	196	82412LH	199	83202	197
80321SS	190	80611	190	81113	196	82412SS	191	83202H	199
80322	190	80612	190	81114	196	82504	191	83204	197
80322L	190	80613	190	81201	196	82504H	199	83204	199
80322SS	190	80614	190	81202	196	82504L	191	83301	197
80332	190	80621	190	81203	196	82504LH	199	83302	197
80332L	190	80622	190	81204	196	82504SS	191	83302H	199
80332SS	190	80632	190	81213	196	82510	191	83304	197
80400	190	80701	193	81214	196	82510L	191	83304	199
80400L	190	80701SS	193	81300	201	82510SS	191	89001	187, 188, 193, 194
80400SS	190	80702	193	81301	201	82511	191	89002	187, 188, 193, 194
80401	190	80702SS	193	81302	201	82511L	191	89002	188
80401L	190	80703	193	81303	201	82511SS	191	89003	188
80401SS	190	80703SS	193	81304	201	82512	191	89003	187, 188, 193, 194
80402	190	80704	193	81400	201	82512H	199	89004	187, 188
80402L	190	80704SS	193	81401	201	82512L	191	89005	187
80402SS	190	80713	193	81402	201	82512SS	191	89801	201
80403	190	80713SS	193	81403	201	82604	191	89802	201
80403L	190	80714	193	81404	201	82604H	199	89803	201
80403SS	190	80714SS	193	81500	201	82610	191	89804	201

89805	201	90802H	207	91401ZH	211	92503	219	94801ZH	215
89901	187	90802Z	207	91402	211	92601	219	94802H	215
89902	187	90802ZH	207	91402H	211	92602	219	94802ZH	215
89903	187	90803	207	91402Z	211	92603	219	94803H	215
89904	187	90803H	207	91402ZH	211	92701	219	94803ZH	215
89905	187	90803Z	207	91403	211	92702	219	94901H	215
90101	207	90803ZH	207	91403H	211	92703	219	94901ZH	215
90101Z	207	90810PH	209	91403Z	211	92801	219	94902H	215
90102	207	90901	207	91403ZH	211	92802	219	94902ZH	215
90102Z	207	90901H	207	91501	211	92803	219	94903H	215
90103	207	90901Z	207	91501Z	211	92901	219	94903ZH	215
90103Z	207	90901ZH	207	91502	211	92902	219	95001H	215
90201	207	90902	207	91502Z	211	92903	219	95001ZH	215
90201Z	207	90902H	207	91503	211	93001	219	95002H	215
90202	207	90902Z	207	91503Z	211	93002	219	95002ZH	215
90202Z	207	90902ZH	207	91601	211	93003	219	95003H	215
90203	207	90903	207	91601H	211	93401	221	95003ZH	215
90203Z	207	90903H	207	91601Z	211	93402	221	95101H	215
90301	207	90903Z	207	91601ZH	211	93403	221	95101ZH	215
90301H	207	90903ZH	207	91602	211	93501	221	95102H	215
90301Z	207	91001	211	91602H	211	93502	221	95102ZH	215
90301ZH	207	91001Z	211	91602Z	211	93503	221	95103H	215
90302	207	91002	211	91602ZH	211	93601	221	95103ZH	215
90302H	207	91002Z	211	91603	211	93602	221	95201H	215
90302Z	207	91003	211	91603H	211	93603	221	95201ZH	215
90302ZH	207	91003Z	211	91603Z	211	93701	221	95202H	215
90303	207	91101	211	91603ZH	211	93702	221	95202ZH	215
90303H	207	91101H	211	91701	211	93703	221	95203H	215
90303Z	207	91101Z	211	91701H	211	93801	221	95203ZH	215
90303ZH	207	91101ZH	211	91701Z	211	93802	221	95301	209
90401	207	91102	211	91701ZH	211	93803	221	95301Z	209
90401Z	207	91102H	211	91702	211	93901	221	95302	209
90402	207	91102Z	211	91702H	211	93902	221	95302Z	209
90402Z	207	91102ZH	211	91702Z	211	93903	221	95303	209
90403	207	91103	211	91702ZH	211	94301H	213	95303Z	209
90403Z	207	91103H	211	91703	211	94301ZH	213	95401	209
90501	207	91103Z	211	91703H	211	94302H	213	95401H	209
90501Z	207	91103ZH	211	91703Z	211	94302ZH	213	95401Z	209
90502	207	91201	211	91703ZH	211	94303H	213	95401ZH	209
90502Z	207	91201H	211	91801	211	94303ZH	213	95402	209
90503	207	91201Z	211	91801Z	211	94401H	213	95402H	209
90503Z	207	91201ZH	211	91802	211	94401ZH	213	95402Z	209
90601	207	91202	211	91802Z	211	94402H	213	95402ZH	209
90601H	207	91202H	211	91803	211	94402ZH	213	95403	209
90601Z	207	91202Z	211	91803Z	211	94403H	213	95403H	209
90601ZH	207	91202ZH	211	91901	219	94403ZH	213	95403Z	209
90602	207	91203	211	91902	219	94501H	213	95403ZH	209
90602H	207	91203H	211	91903	219	94501ZH	213	95410PH	209
90602Z	207	91203Z	211	92001	219	94502H	213	95501	209
90602ZH	207	91203ZH	211	92002	219	94502ZH	213	95501H	209
90603	207	91301	211	92003	219	94503H	213	95501Z	209
90603H	207	91301H	211	92101	219	94503ZH	213	95501ZH	209
90603Z	207	91301Z	211	92102	219	94601H	213	95502	209
90603ZH	207	91301ZH	211	92103	219	94601ZH	213	95502H	209
90701	207	91302	211	92201	219	94602H	213	95502Z	209
90701Z	207	91302H	211	92202	219	94602ZH	213	95502ZH	209
90702	207	91302Z	211	92203	219	94603H	213	95503	209
90702Z	207	91302ZH	211	92301	219	94603ZH	213	95503H	209
90703	207	91303	211	92302	219	94701H	213	95503Z	209
90703Z	207	91303H	211	92303	219	94701ZH	213	95503ZH	209
90801	207	91303Z	211	92401	219	94702H	213	95601	209
90801H	207	91303ZH	211	92402	219	94702ZH	213	95601H	209
90801Z	207	91401	211	92403	219	94703H	213	95601Z	209
90801ZH	207	91401H	211	92501	219	94703ZH	213	95601ZH	209
90802	207	91401Z	211	92502	219	94801H	215	95602	209

95602H	209	P96301H	223
95602Z	209	P96301ZH	223
95602ZH	209	P96302H	223
95603	209	P96302ZH	223
95603H	209	P96401H	223
95603Z	209	P96401ZH	223
95603ZH	209	P96402H	223
95701	209	P96402ZH	223
95701H	209	P96501H	223
95701Z	209	P96501ZH	223
95701ZH	209	P96502H	223
95702	209	P96502ZH	223
95702H	209	P96601H	223
95702Z	209	P96601ZH	223
95702ZH	209	P96602H	223
95703	209	P96602ZH	223
95703H	209	P96701H	223
95703Z	209	P96701ZH	223
95703ZH	209	P96702H	223
95710PH	209	P96702ZH	223
95801H	217	P96801H	223
95801ZH	217	P96801ZH	223
95802H	217	P96802H	223
95802ZH	217	P96802ZH	223
95803H	217	P96901H	223
95803ZH	217	P96901ZH	223
95901H	217	P96902H	223
95901ZH	217	P96902ZH	223
95902H	217	P97001H	223
95902ZH	217	P97001ZH	223
95903H	217	P97002H	223
95903ZH	217	P97002ZH	223
99601	206	P97101H	223
99602	206	P97101ZH	223
99603	206	P97102H	223
99604	208, 210	P97102ZH	223
99605	208, 210		
99606	210		
99607	212		
99608	214, 216		
99801	206		
99802	206, 208, 210, 218, 221		
99804	206, 208, 210, 212, 214, 216, 218, 221, 222		
99805	206, 208, 210, 212, 214, 216, 218, 221, 222		
99806	210, 212, 214, 216, 218, 221, 222		
99807	218, 222		
P19999	116		
P96001H	223		
P96001ZH	223		
P96002H	223		
P96002ZH	223		
P96101H	223		
P96101ZH	223		
P96102H	223		
P96102ZH	223		
P96201H	223		
P96201ZH	223		
P96202H	223		
P96202ZH	223		





 **Movex S.r.l. Industrial Innovations**
Via Tasso (angolo Via Noli Marenzi)
24060 Telgate (Bergamo) - Italy
Phone +39.035.8359711
Fax +39.035.4420873



 **Movex GmbH Industrial Innovations**
Alfred-Nobel-Strasse, 4
68519 Viernheim - Germany
Phone +49.(0)6204.9375-0
Fax +49.(0)6204.9375-55



 **Movex Industrial Innovations UK Ltd.**
Unit 7, Dene Valley Business Centre
Kineton CV35 0JD, Warwickshire - UK
Phone +44.1926.642933

 **Movex France - Sales Office**
Phone +33.06.06.81.99.76
Fax +33.09.70.62.50.98

 **Movex Nederland - Sales Office**
Phone +31.(0)630.99.48.50

 **Movex Singapore - Sales Office**
Phone +65.9815.0482